

GUIs: Graphical User Interfaces

Their mouse had a mean time between failure of ... a week ... it would jam up irreparably, or ... jam up on the table-- ... It had a flimsy cord whose wires would break. Steve Jobs: "... Xerox says it can't be built for < \$400, I want a \$10 mouse that will never fail and can be mass produced, because it's going to be the primary interface of the computer ..."

... Dean Hovey ... came back, "I've got some good and some bad news. Good news: we've got a new project with Apple. Bad news: I told Steve we'd design a mouse for 10 bucks."

... year later ... we ... filed ... and were granted a patent, on the electro-mechanical-optical mouse of today; ... we ended up ... [making] the mouse as invisible to people as it is today.

Steve Sachs interview on first computer with GUI: Apple Lisa (~\$10K in 1982).
<http://library.stanford.edu/mac/primary/interviews/sachs/trans.html>

No recitation next week: Fall break

A4: Due Saturday, 14 October.

Wednesday TAs will be in their recitation rooms ready to help those who need help on A4.

Look carefully at Piazza note A4 FAQs!

We will attempt to keep up with Piazza questions over the break.

Last day to ask for prelim I grade: Friday

Sign up for lunches with instructors. Pinned Piazza note.

Dan Belyeu, fellow CS2110 student

$$08I-11. \quad \frac{(-678)(-50.3) + (-596)(-270)}{-18.3 + 1.45 - (-7.65)(0.847)} \text{ ----- } 11$$

$$08I-12. \quad \frac{0.656(9.27 \times 10^{-5} + 6.27 \times 10^{-5})}{(279 - 370)(0.35)} - \frac{-6.67 \times 10^{-8}}{0.196 - 0.135} \text{ ----- } 12$$

$$08I-13. \quad \frac{-91100 + 52200 - 75500 + 22500 + 3.25 \times 10^5}{(-21.8)(71.3 + 18.6)(-88.2 + 8.86)} \text{ ----- } 13$$

$$08I-14. \quad \frac{326 + 213 - 1270}{(0.31)(-0.894)} - \frac{(1.64 \times 10^6)(1.22 \times 10^{-4} + 7.87 \times 10^{-5})}{0.617 + 0.152 - 0.607} \text{ ----- } 14$$

$$08I-15. \quad \frac{24100 + 1.65 \times 10^5 - (27800 + 34400)(1.27 - 0.55)}{(-537)(-1.56)(\pi)(783 - 398 + 1530)} \text{ ----- } 15$$

GUI (Graphical User Interface)

- Provides a friendly interface between user and program
- Allows **event-driven** or **reactive** programming: The program reacts to events such as button clicks, mouse movement, keyboard input
- Often is **multi-threaded**: Different threads of execution can be executing simultaneously. We study concurrency and threads in April.

Two aspects to making a GUI:

1. Placing components (buttons, text, etc.) in it. **TODAY**
2. Listening/responding to events **Next Lecture**

Lecture notes page of course website, rows for GUI lectures:
Contains guiDemo.zip. It's filled with short demos of GUI features including demos for today and next lecture.

Download it and look at demos in DrJava or Eclipse.

GUI (Graphical User Interface)

There are three GUI packages in Java:

- **AWT** (Abstract or Awful Window Toolkit) —first one. Some parts are implemented not in Java but in code that depends on the platform. Came with first Java.
- **Swing** —a newer one, which builds on AWT as much as possible. It is “lightweight”: all code written as Java classes/interfaces. Released in 97-98.
- JavaFX —completely new! Much more functionality, flexibility, but **far** too complicated to teach in CS2110. (Released first in 2008)

We use Swing (and parts of AWT)

Class JFrame

JFrame object: associated with a window on your monitor.

Generally, a GUI is a JFrame object with various components placed in it

Some methods in a JFrame object

hide()	show()	setVisible(boolean)
getX()	getY()	(coordinates of top-left point)
getWidth()	getHeight()	setLocation(int, int)
getTitle()		setTitle(String)
getLocation()		setLocation(int, int)

Over 100 methods in a JFrame object!

Class JFrame is in package javax.swing


Placing components in a JFrame

Layout manager: Instance controls placement of components.

JFrame layout manager default: BorderLayout.

BorderLayout layout manager: Can place 5 components:

```
public class C extends JFrame {  
    public C() {  
        JButton jb= new JButton("Click here");  
        JLabel jl= new JLabel( "west");  
        add(jb, BorderLayout.EAST);  
        add(jl, BorderLayout.WEST);  
        add(new JLabel("south"), BorderLayout.SOUTH);  
        add(new JLabel("center"), BorderLayout.CENTER);  
        add(new JLabel("north"), BorderLayout.NORTH);  
        pack();  
        setVisible(true);  
    }  
}
```

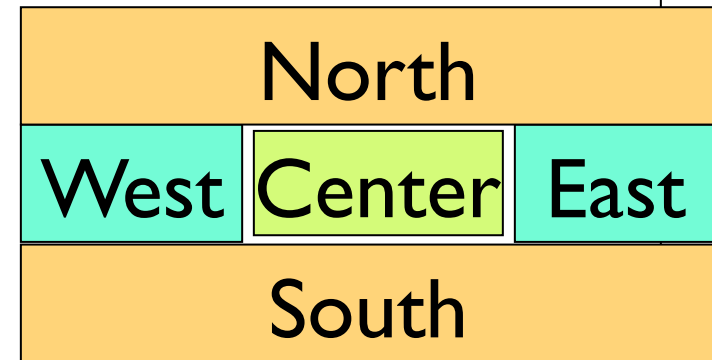

JFrameDemo.java

Putting components in a JFrame

```
import java.awt.*; import javax.swing.*;
/** Demonstrate placement of components in a JFrame.
    Places five components in 5 possible areas:
    (1) a JButton in the east,          (2) a JLabel in the west,
    (3) a JLabel in the south,         (4) a JTextField in the north
    (5) a JTextArea in the center. */

public class ComponentExample extends JFrame {
    /** Constructor: a window with title t and 5 components */
    public ComponentExample(String t) {
        super(t); cp.add(new JButton("click me"), BorderLayout.EAST);
        add(new JTextField("type here", 22), BorderLayout.NORTH);
        add(new JCheckBox("I got up today"), BorderLayout.SOUTH);
        add(new JLabel("label 2"), BorderLayout.WEST);
        add(new JTextArea("type\nhere", 4, 10), BorderLayout.CENTER);
        pack();
    }
}
```

Also try it without pack()

ComponentExample.java

Packages --Components

Packages that contain classes that deal with GUIs:

java.awt: Old package. **javax.swing:** New package.

javax.swing has a better way of listening to buttons, text fields, etc. Components are more flexible.

Jxxxx: in
Swing, with
xxxx in awt.

Component: Something that can be placed in a GUI window. They are instances of certain classes, e.g.

JButton, Button:	Clickable button
JLabel, Label:	Line of text
JTextField, TextField:	Field into which the user can type
JTextArea, TextArea:	Many-row field into which user can type
JPanel, Panel:	Used for graphics; to contain other components
JCheckBox:	Checkable box with a title
JComboBox:	Menu of items, one of which can be checked
JRadioButton:	Same functionality as JCheckBox
Container:	Can contain other components
Box:	Can contain other components

Packages --Components

Packages that contain classes that deal with GUIs:

java.awt: Old package. **javax.swing:** New package.

javax.swing has a better way of listening to buttons, text fields, etc. Components are more flexible.

1. Look at AreaExample to see how to get scroll bars.
2. Look at BorderDemo to demo radio buttons, ButtonGroup, and borders.
3. Look at CheckBoxExample.
4. Look at ColorChooseExample.
5. Look at ComboBoxExample.
6. Look at SliderExample
7. Look at TemperatureSlider.

Basic Components

Component

Button, Canvas

Checkbox, Choice

Label, List, Scrollbar

TextComponent

TextField, TextArea

Container

JComponent

AbstractButton

JButton

JToggleButton

JCheckBox

RadioButton

JLabel, JList

JOptionPane, JPanel

JPopupMenu, JScrollBar, JSlider

JTextComponent

JTextField, JTextArea

Component: Something that can be placed in a GUI window. These are the basic ones used in GUIs

Note the use of subclasses to provide structure and efficiency. For example, there are two kinds of JToggleButtons, so that class has two subclasses.

Components that can contain other components

Component

Box

Container

 JComponent

 JPanel

 Panel

 Applet

Window

 Frame

 JFrame

 JWindow

java.awt is the old GUI package.

javax.swing is the newer GUI package.

When they wanted to use an old name, they put J in front of it.

(e.g. Frame and JFrame)

When constructing javax.swing, the attempt was made to rely on the old package as much as possible.

So, JFrame is a subclass of Frame.

But they couldn't do this with JPanel.

```

import java.awt.*;   import javax.swing.*;
/** Instance has labels in east /west, JPanel with four buttons in center. */
public class PanelDemo extends JFrame {
    JPanel p= new JPanel();
    /** Constructor: a frame with title "Panel demo", labels in east/west,
        blank label in south, JPanel of 4 buttons in the center */
    public PanelDemo() {
        super("Panel demo");
        p.add(new JButton("0"));  p.add(new JButton("1"));
        p.add(new JButton("2"));  p.add(new JButton("3"));
        add(new JLabel("east"), BorderLayout.EAST);
        add(new JLabel("west"), BorderLayout.WEST);
        add(new JLabel("  "), BorderLayout.SOUTH);
        add(p, BorderLayout.CENTER);
        pack();
    }
}

```

**JPanel as a
container**

panelDemo

JPanel layout manager default: FlowLayout.

FlowLayout layout manager: Place any number of components. They appear in the order added, taking as many rows as necessary.

```

import javax.swing.*; import java.awt.*;
/** Demo class Box. Comment on constructor says how frame is laid out. */
public class BoxDemo extends JFrame {
    /** Constructor: frame with title "Box demo", labels in the east/west,
        blank label in south, horizontal Box with 4 buttons in center. */
    public BoxDemo() {
        super("Box demo");
        Box b= new Box(BoxLayout.X_AXIS);
        b.add(new JButton("0"));    b.add(new JButton("1"));
        b.add(new JButton("2"));    b.add(new JButton("3"));
        add(new JLabel("east"), BorderLayout.EAST);
        add(new JLabel("west"), BorderLayout.WEST);
        add(new JLabel(" "),    BorderLayout.SOUTH);
        add(b,    BorderLayout.CENTER);
        pack(); show();
    }
}

```

Class Box: a container

BoxDemo

Box layout manager default: BorderLayout.

BoxLayout layout manager: Place any number of components. They appear in the order added, taking only one row.

```

public class BoxDemo2 extends JFrame {
    /** Constructor: frame with title t and 3 columns with n, n+1, and n+2 buttons. */
    public BoxDemo2(String t, int n) {
        super(t);
        // Create Box b1 with n buttons.
        Box b1 = new Box(BoxLayout.Y_AXIS);
        for (int i = 0; i < n; i++)
            b1.add(new JButton("1 " + i));
        // Create Box b2 with n+1 buttons.
        Box b2 = ...
        // Create Box b3 with n+2 buttons.
        Box b3 = ...
        // Create horizontal box b containing b1, b2, b3
        Box b = new Box(BoxLayout.X_AXIS);
        b.add(b1);
        b.add(b2);
        b.add(b3);
        ;
        add(b, BorderLayout.CENTER);
        pack(); show();
    }
}

```

Boxes within a Box
3 vertical boxes, each
a column of buttons,
are placed in a
horizontal box

BoxLayout layout manager: Place any number of components. They appear in the order added, taking only one row.

BoxDemo2

Simulate BorderLayout Manager in a JFrame

To simulate using a BorderLayout manager for a JFrame, create a Box and place it as the sole component of the JFrame:

```
JFrame jf= new JFrame("title");  
Box b= new Box(BoxLayout.X_AXIS);  
Add components to b;  
jf.add(b, BorderLayout.CENTER);
```

- 1. Start developing a GUI by changing an already existing one.** A lot of details. Hard to get all details right when one starts from scratch and has little idea about the Java GUI package.
2. Showed how to place components in a GUI. Next time: how to “listen” to things like button clicks in a GUI.