


# CS4670/5670: Computer Vision

Kavita Bala

## Lecture 10: Harris Corner Detector

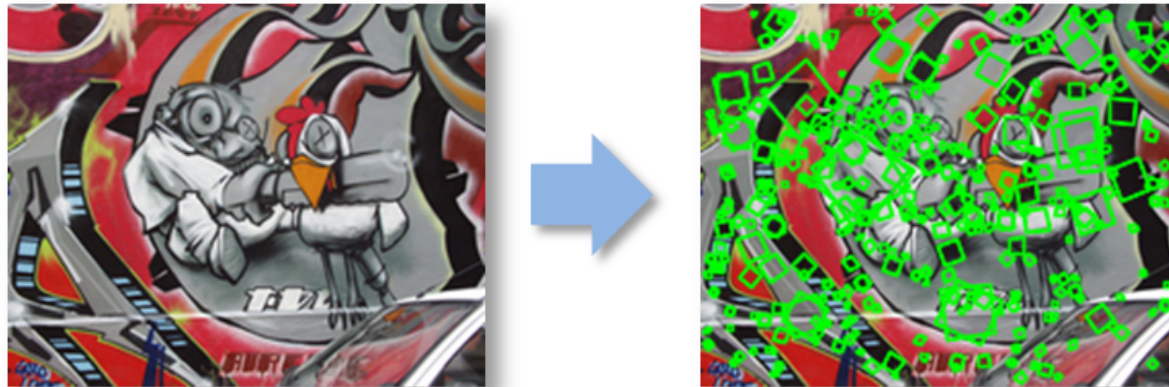

# Announcements

- HW 1 will be out early next week
- Quiz 1 graded

# Finding Corners

- Key property: in the region around a corner, image gradient has two or more dominant directions
- Corners are repeatable and distinctive

C.Harris and M.Stephens, 1988. ["A Combined Corner and Edge Detector."](#)  
*Proceedings of the 4th Alvey Vision Conference*: pages 147--151.




# Feature extraction: Corners



# Local measures of uniqueness


Suppose we only consider a small window of pixels

- What defines whether a feature is a good or bad candidate?

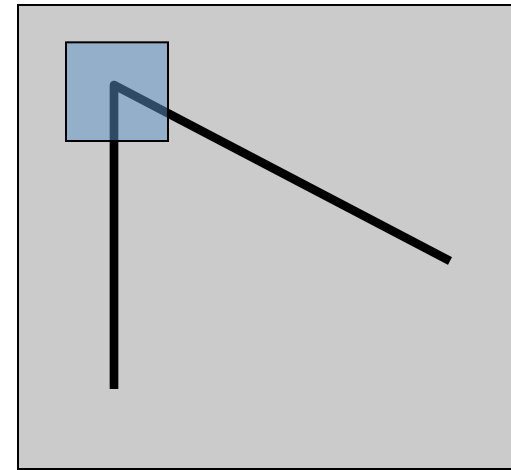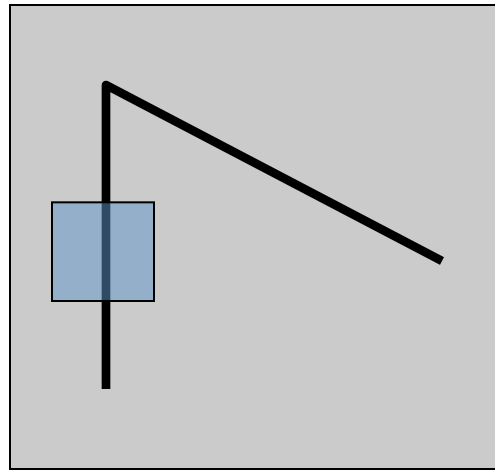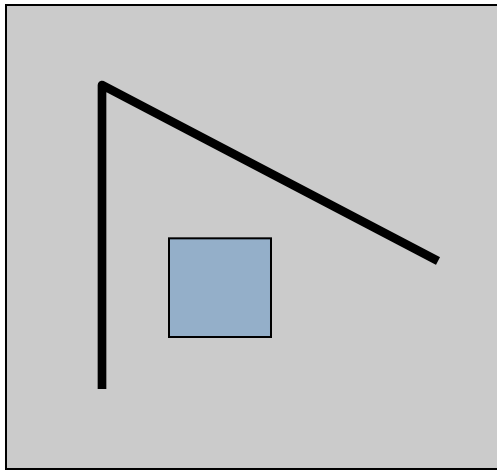


# Corner Detection: Basic Idea


- We should easily recognize the point by looking through a small window
- Shifting a window in *any direction* should give a *large change* in intensity

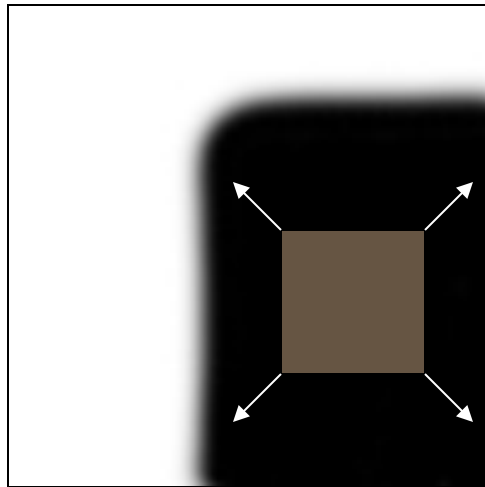

“flat” region:  
no change in  
all directions

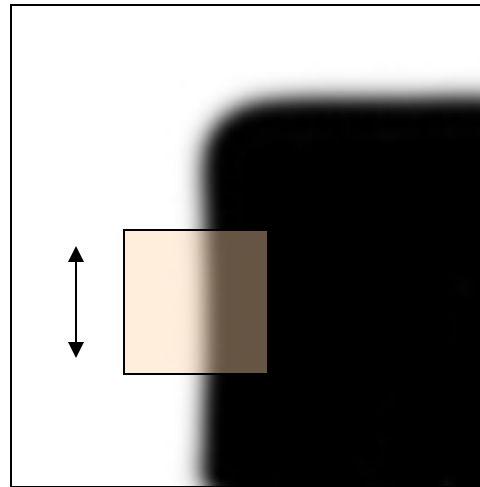

“edge”:  
no change along  
the edge  
direction

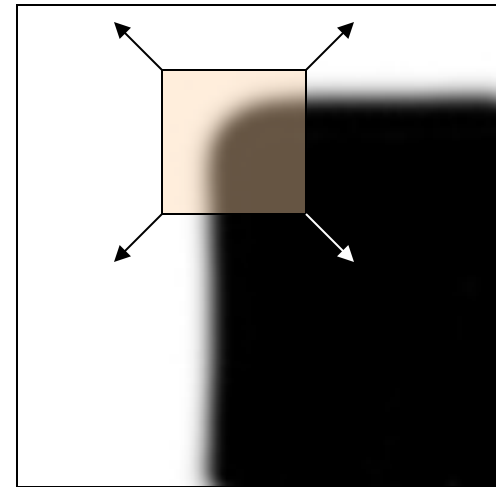


“corner”:  
significant  
change in all  
directions

# Harris corner detection: the math

Consider shifting the window  $W$  by  $(u, v)$

- how do the pixels in  $W$  change?
- compare each pixel before and after by summing up the squared differences (SSD)
- this defines an SSD “error”  $E(u, v)$ :

$$E(u, v) = \sum_{(x, y) \in W} [I(x + u, y + v) - I(x, y)]^2$$

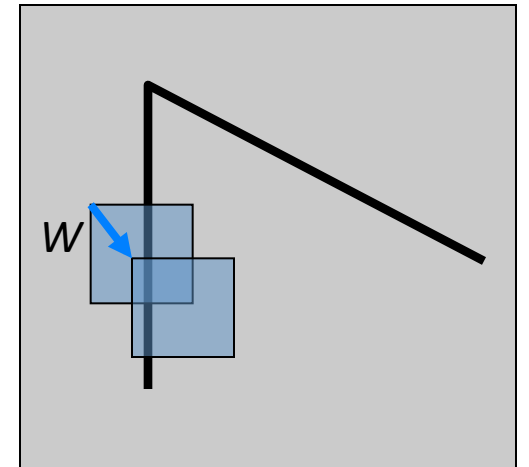


# Corner Detection: Mathematics

Change in appearance of window  
for the shift  $[u, v]$ :

$$E(u, v) = \sum_{x, y} w(x, y) [I(x + u, y + v) - I(x, y)]^2$$

We want to find out how this function behaves for small shifts

$E(u, v)$

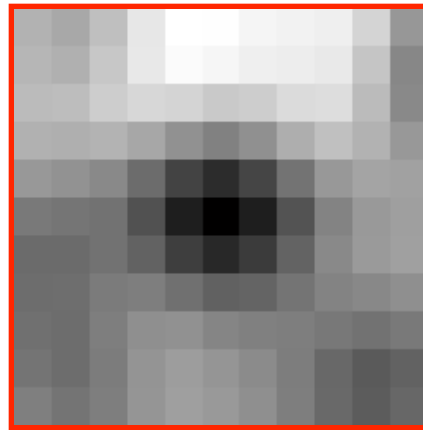



# Small motion assumption

Taylor Series expansion of  $I$ :

$$I(x+u, y+v) = I(x, y) + \frac{\partial I}{\partial x}u + \frac{\partial I}{\partial y}v + \text{higher order terms}$$

If the motion  $(u,v)$  is small, then first order approximation is good

$$\begin{aligned} I(x+u, y+v) &\approx I(x, y) + \frac{\partial I}{\partial x}u + \frac{\partial I}{\partial y}v \\ &\approx I(x, y) + [I_x \ I_y] \begin{bmatrix} u \\ v \end{bmatrix} \end{aligned}$$


shorthand:  $I_x = \frac{\partial I}{\partial x}$

Plugging this into the formula on the previous slide...

# Corner detection: the math

Consider shifting the window  $W$  by  $(u, v)$

- define an SSD “error”  $E(u, v)$ :

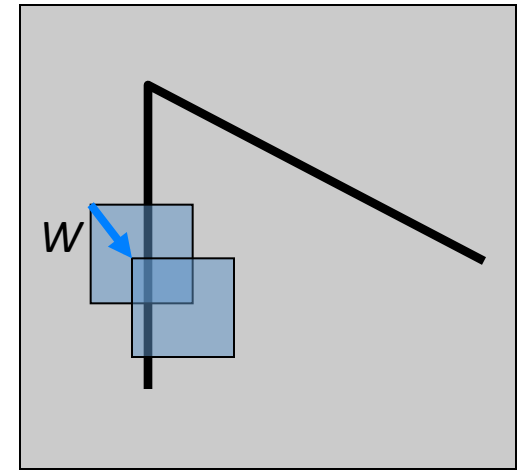

$$\begin{aligned} E(u, v) &= \sum_{(x, y) \in W} [I(x + u, y + v) - I(x, y)]^2 \\ &\approx \sum_{(x, y) \in W} [I(x, y) + I_x u + I_y v - I(x, y)]^2 \\ &\approx \sum_{(x, y) \in W} [I_x u + I_y v]^2 \end{aligned}$$


# Corner detection: the math

Consider shifting the window  $W$  by  $(u, v)$

- define an SSD “error”  $E(u, v)$ :

$$E(u, v) \approx \sum_{(x, y) \in W} [I_x u + I_y v]^2$$
$$\approx Au^2 + 2Buv + Cv^2$$

$$A = \sum_{(x, y) \in W} I_x^2 \quad B = \sum_{(x, y) \in W} I_x I_y \quad C = \sum_{(x, y) \in W} I_y^2$$

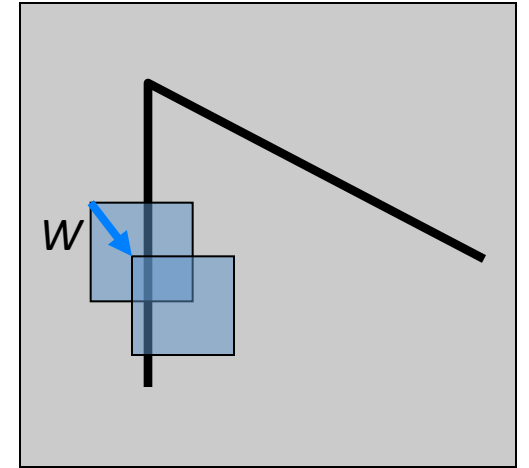


- Thus,  $E(u, v)$  is locally approximated as a quadratic error function

# Interpreting the second moment matrix

The surface  $E(u,v)$  is locally approximated by a quadratic form. Let's try to understand its shape.

$$E(u, v) \approx [u \ v] M \begin{bmatrix} u \\ v \end{bmatrix}$$

$$M = \sum_{x,y} w(x, y) \begin{bmatrix} I_x^2 & I_x I_y \\ I_x I_y & I_y^2 \end{bmatrix}$$

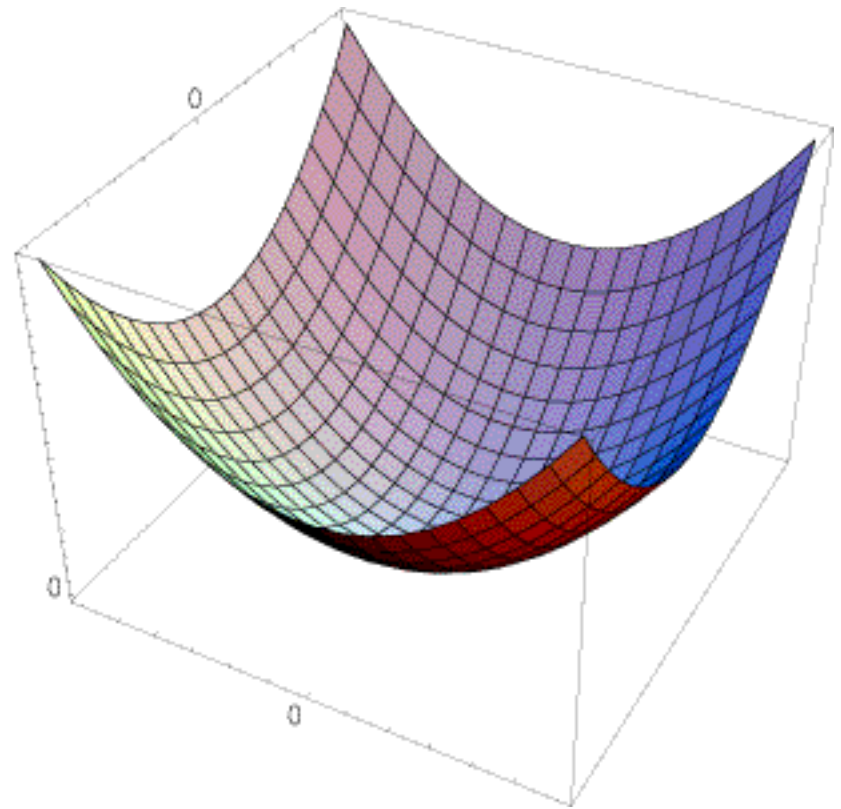

# The second moment matrix


The surface  $E(u,v)$  is locally approximated by a quadratic form.

$$E(u, v) \approx Au^2 + 2Buv + Cv^2$$
$$\approx \begin{bmatrix} u & v \end{bmatrix} \begin{bmatrix} A & B \\ B & C \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix}$$

$$A = \sum_{(x,y) \in W} I_x^2$$

$$B = \sum_{(x,y) \in W} I_x I_y$$

$$C = \sum_{(x,y) \in W} I_y^2$$

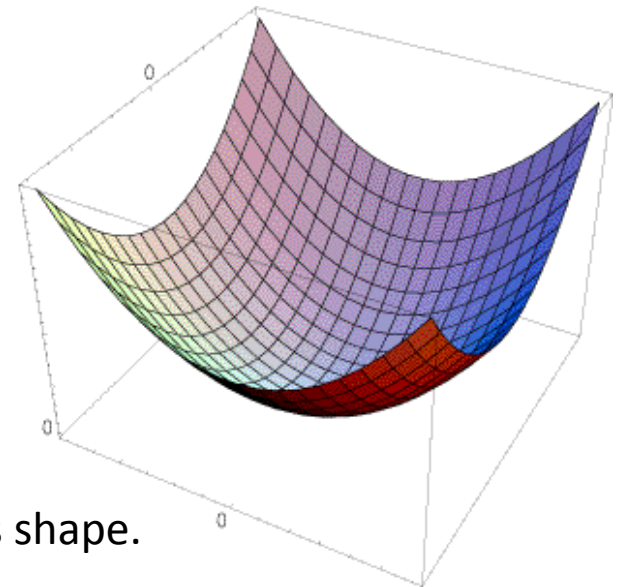


Let's try to understand its shape.

$$E(u, v) \approx \begin{bmatrix} u & v \end{bmatrix} \underbrace{\begin{bmatrix} A & B \\ B & C \end{bmatrix}}_M \begin{bmatrix} u \\ v \end{bmatrix}$$

$$A = \sum_{(x,y) \in W} I_x^2$$


$$B = \sum_{(x,y) \in W} I_x I_y$$

$$C = \sum_{(x,y) \in W} I_y^2$$

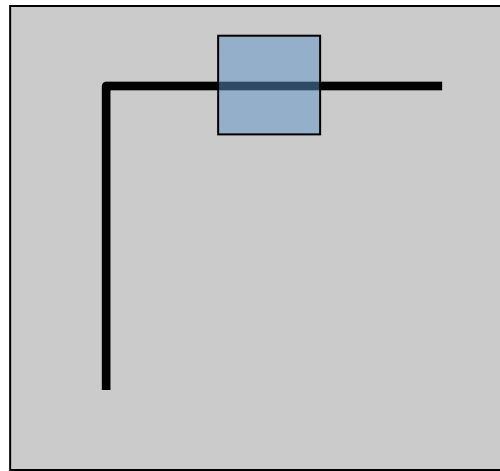

Horizontal edge:  $I_x = 0$

$$M = \begin{bmatrix} 0 & 0 \\ 0 & C \end{bmatrix}$$

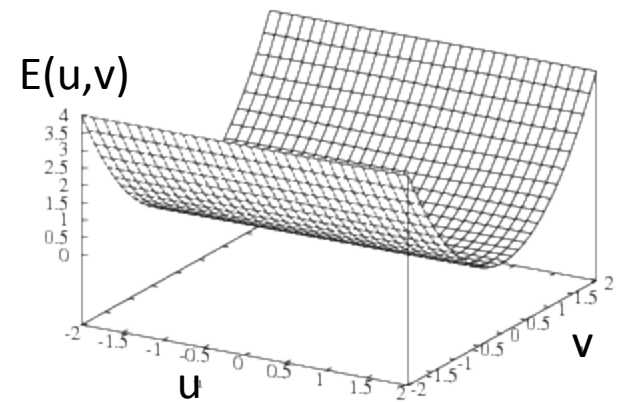


$$E(u, v) \approx \begin{bmatrix} u & v \end{bmatrix} \underbrace{\begin{bmatrix} A & B \\ B & C \end{bmatrix}}_M \begin{bmatrix} u \\ v \end{bmatrix}$$

$$A = \sum_{(x,y) \in W} I_x^2$$


$$B = \sum_{(x,y) \in W} I_x I_y$$

$$C = \sum_{(x,y) \in W} I_y^2$$



Vertical edge:  $I_y = 0$


$$M = \begin{bmatrix} A & 0 \\ 0 & 0 \end{bmatrix}$$

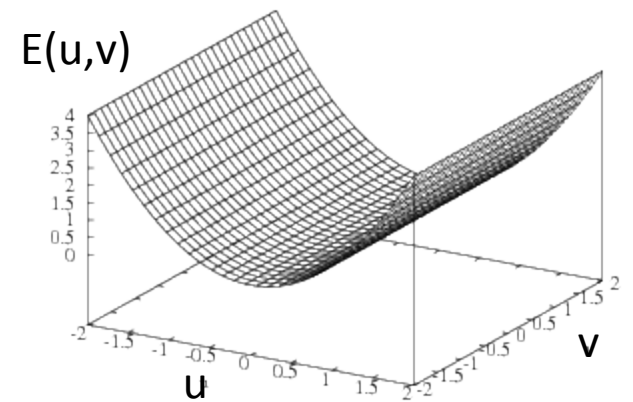

# Interpreting the second moment matrix

Consider a horizontal “slice” of  $E(u, v)$ :  $[u \ v] M \begin{bmatrix} u \\ v \end{bmatrix} = \text{const}$

This is the equation of an ellipse.

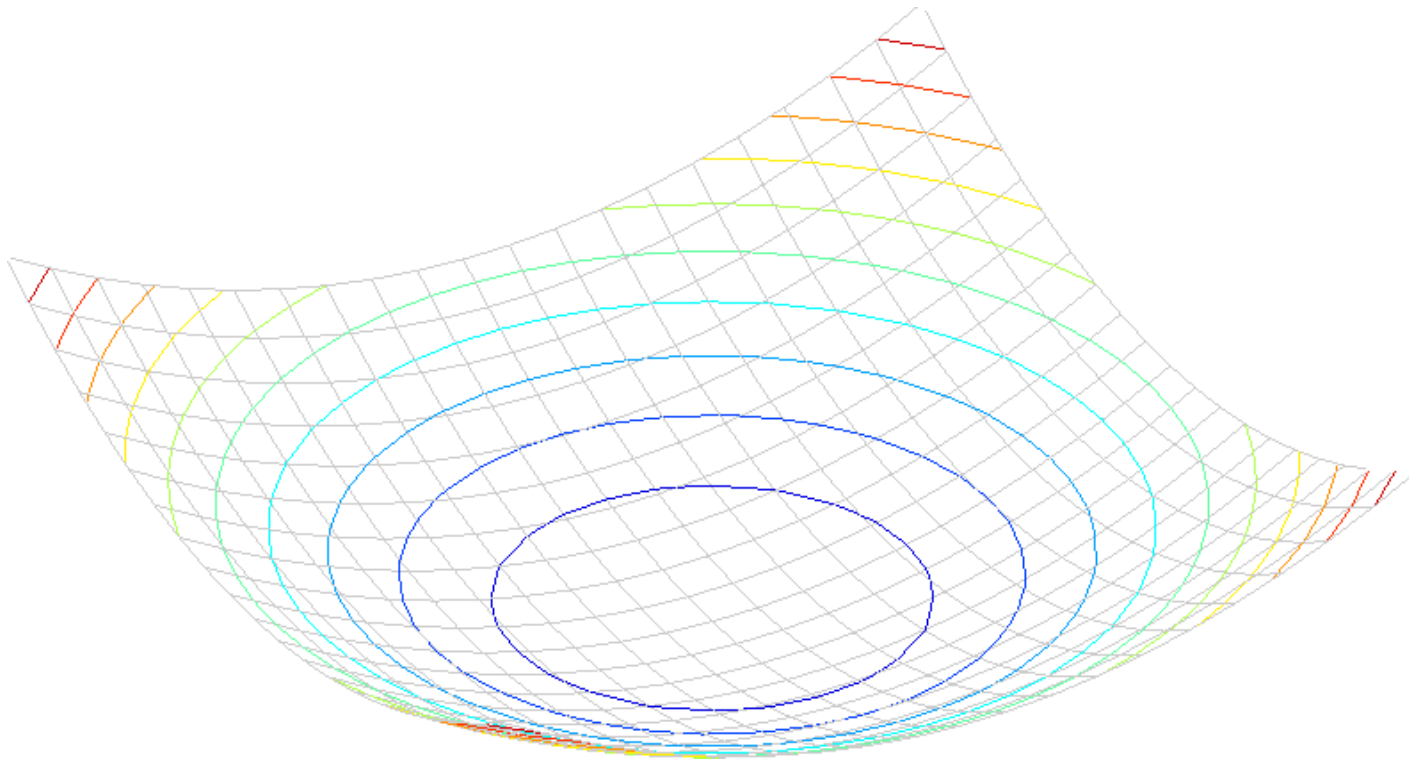



# Quick eigenvalue/eigenvector review

The **eigenvectors** of a matrix **A** are the vectors **x** that satisfy:

$$Ax = \lambda x$$

The scalar  $\lambda$  is the **eigenvalue** corresponding to **x**

- The eigenvalues are found by solving:

$$\det(A - \lambda I) = 0$$

- Say, **A = H** is a 2x2 matrix, so we have

$$\det \begin{bmatrix} h_{11} - \lambda & h_{12} \\ h_{21} & h_{22} - \lambda \end{bmatrix} = 0$$

- The solution:

$$\lambda_{\pm} = \frac{1}{2} \left[ (h_{11} + h_{22}) \pm \sqrt{4h_{12}h_{21} + (h_{11} - h_{22})^2} \right]$$

Once you know  $\lambda$ , you find **x** by solving

$$\begin{bmatrix} h_{11} - \lambda & h_{12} \\ h_{21} & h_{22} - \lambda \end{bmatrix} \begin{bmatrix} x \\ y \end{bmatrix} = 0$$


# Interpreting the second moment matrix

Consider a horizontal “slice” of  $E(u, v)$ :  $[u \ v] M \begin{bmatrix} u \\ v \end{bmatrix} = \text{const}$

This is the equation of an ellipse.


Diagonalization of  $M$ :  $M = R^{-1} \begin{bmatrix} \lambda_1 & 0 \\ 0 & \lambda_2 \end{bmatrix} R$

The axis lengths of the ellipse are determined by the eigenvalues and the orientation is determined by  $R$

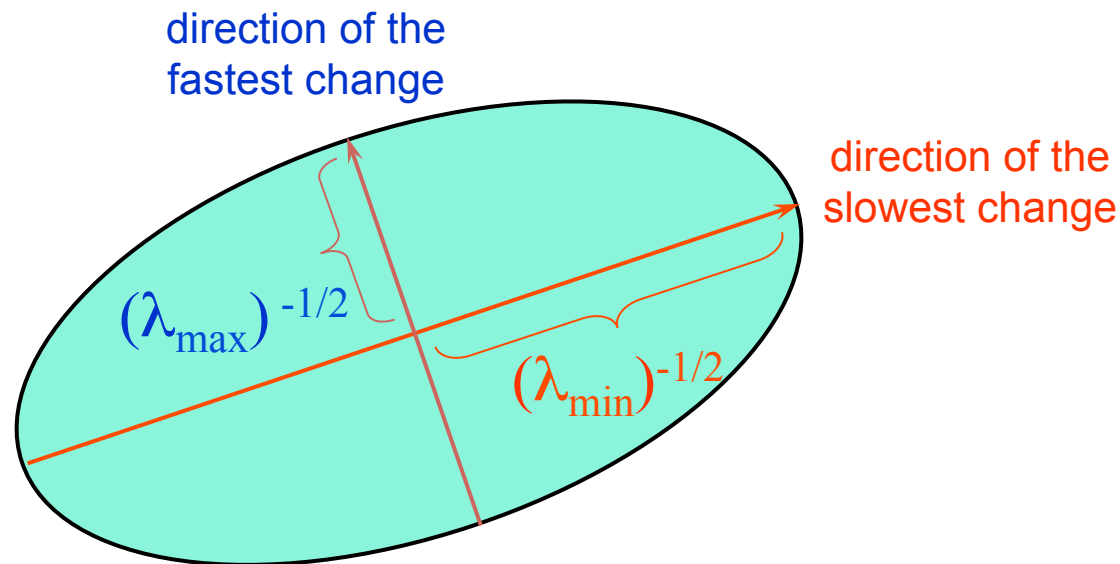

# Corner detection: the math

$$E(u, v) \approx \begin{bmatrix} u & v \end{bmatrix} \begin{bmatrix} A & B \\ B & C \end{bmatrix} \begin{bmatrix} u \\ v \end{bmatrix}$$

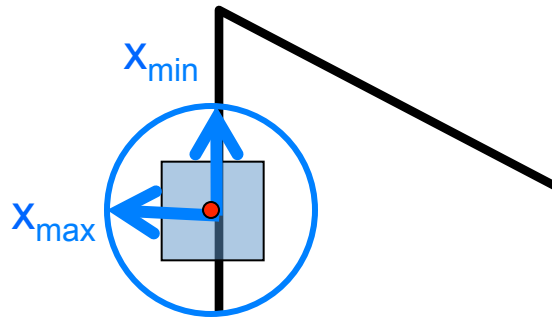

$$M x_{\max} = \lambda_{\max} x_{\max}$$


$$M x_{\min} = \lambda_{\min} x_{\min}$$

## Eigenvalues and eigenvectors of M

- Define shift directions with the smallest and largest change in error
- $x_{\max}$  = direction of largest increase in  $E$
- $\lambda_{\max}$  = amount of increase in direction  $x_{\max}$
- $x_{\min}$  = direction of smallest increase in  $E$
- $\lambda_{\min}$  = amount of increase in direction  $x_{\min}$

# Interpreting the eigenvalues

Classification of image points using eigenvalues of  $M$ :

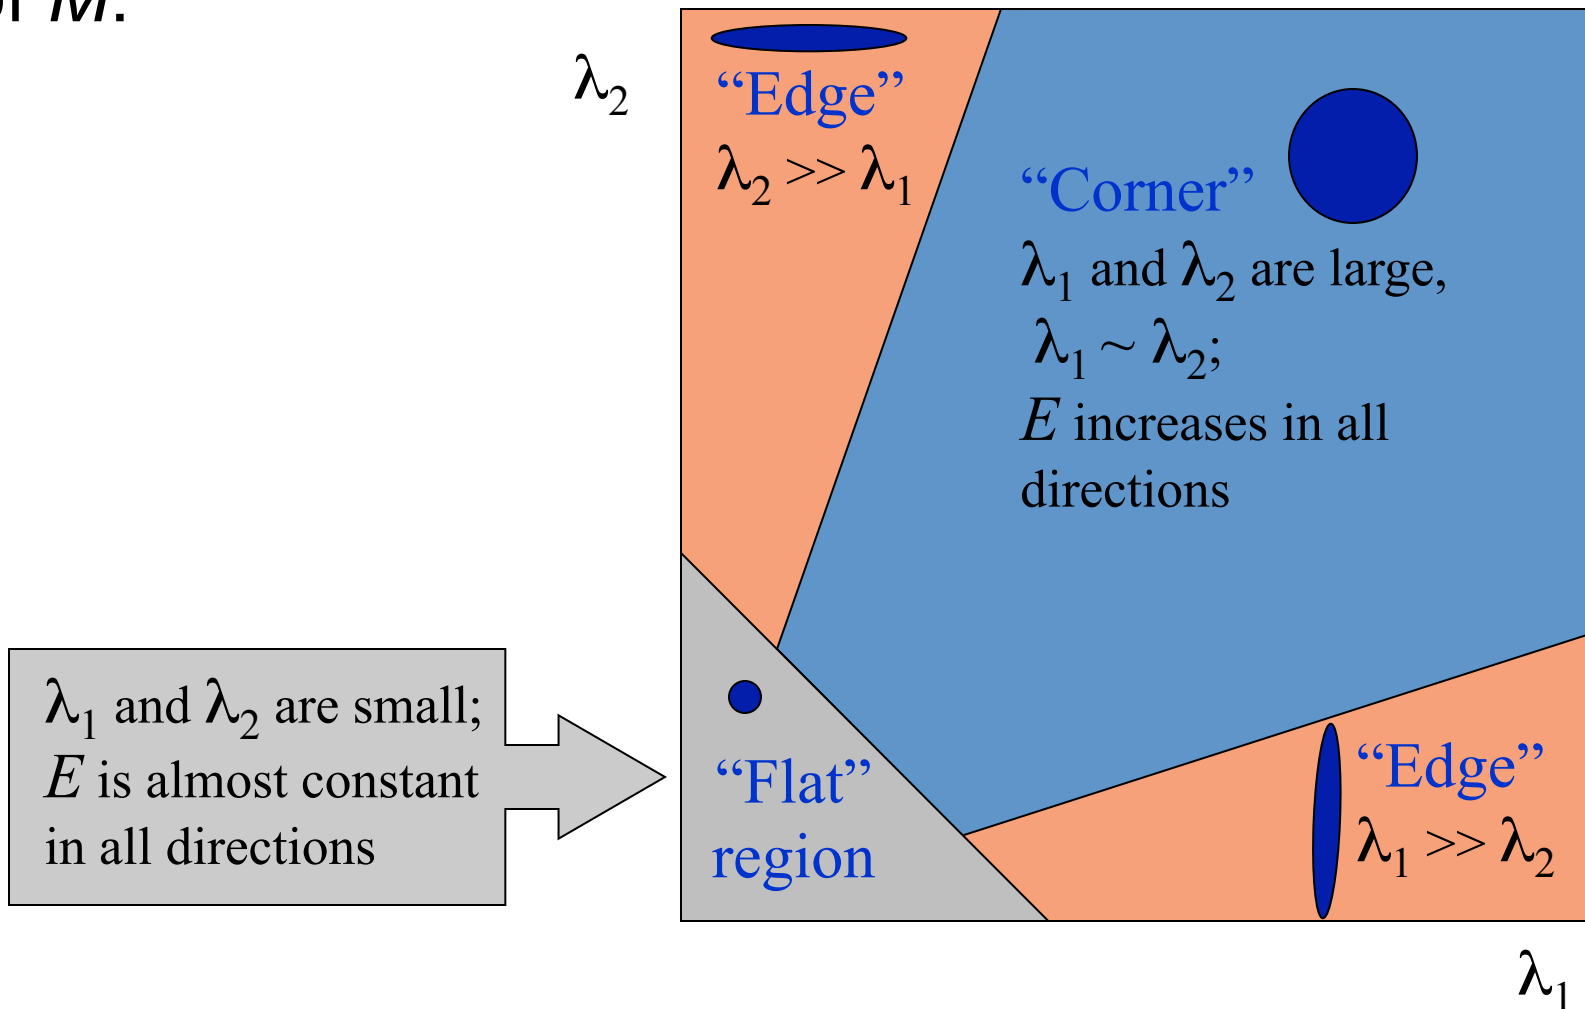

# Corner detection: the math

How are  $\lambda_{\max}$ ,  $x_{\max}$ ,  $\lambda_{\min}$ , and  $x_{\min}$  relevant for feature detection?

- Need a feature scoring function


# Corner detection: the math

How are  $\lambda_{\max}$ ,  $x_{\max}$ ,  $\lambda_{\min}$ , and  $x_{\min}$  relevant for feature detection?


- Need a feature scoring function

Want  $E(u,v)$  to be large for small shifts in all directions


- the minimum of  $E(u,v)$  should be large, over all unit vectors  $[u \ v]$
- this minimum is given by the smaller eigenvalue ( $\lambda_{\min}$ ) of  $M$

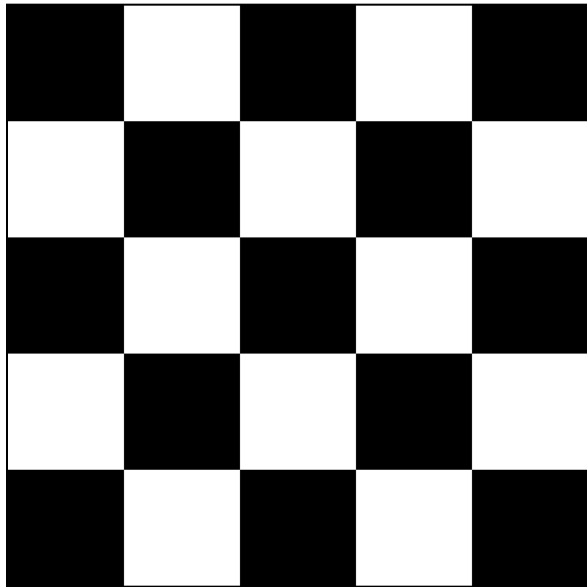

$I$

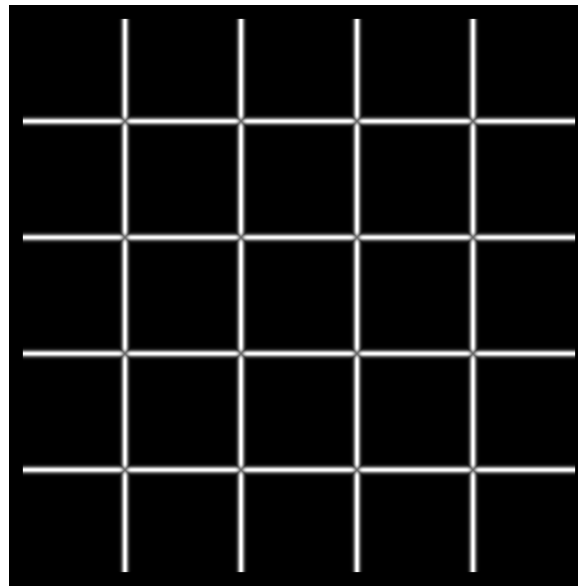

$\lambda_{\max}$

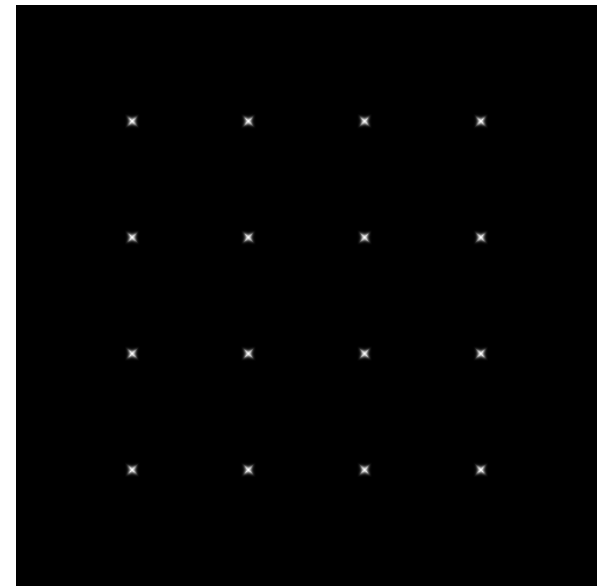


$\lambda_{\min}$


# Corner detection summary

Here's what you do


- Compute the gradient at each point in the image
- Create the  $M$  matrix from the entries in the gradient
- Compute the eigenvalues
- Find points with large response ( $\lambda_{\min} > \text{threshold}$ )
- Choose those points where  $\lambda_{\min}$  is a local maximum as features

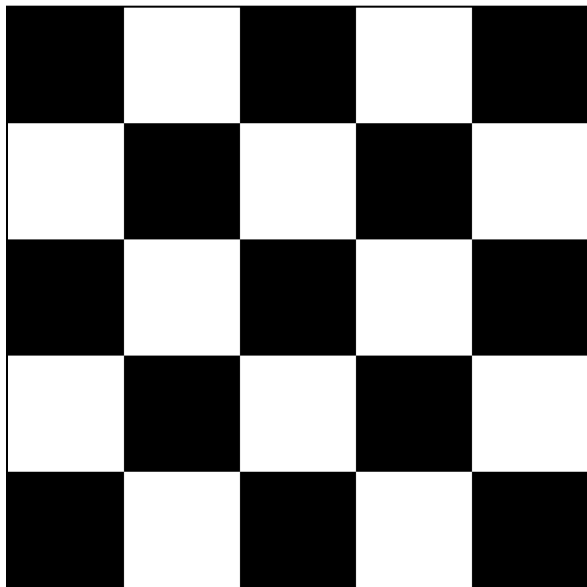

$I$

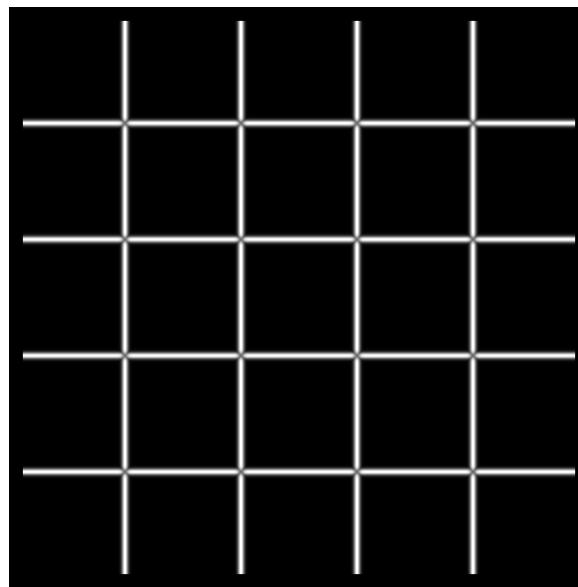

$\lambda_{\max}$

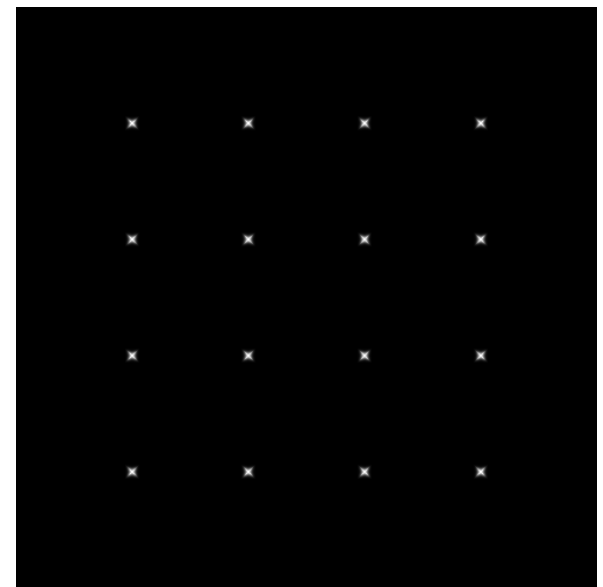


$\lambda_{\min}$

# Corner detection summary

Here's what you do

- Compute the gradient at each point in the image
- Create the  $H$  matrix from the entries in the gradient
- Compute the eigenvalues.
- Find points with large response ( $\lambda_{\min} > \text{threshold}$ )
- Choose those points where  $\lambda_{\min}$  is a local maximum as features

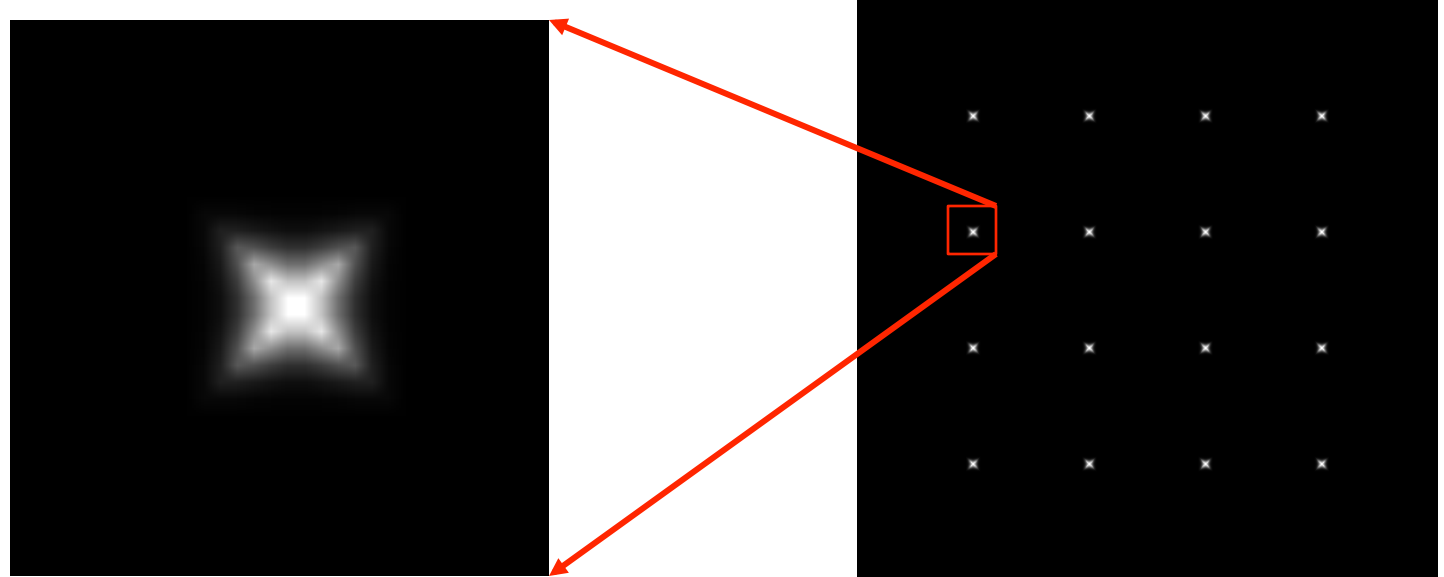

$\lambda_{\min}$



# The Harris operator

$\lambda_{\min}$  is a variant of the “Harris operator” for feature detection


$$f = \frac{\lambda_1 \lambda_2}{\lambda_1 + \lambda_2}$$
$$= \frac{\mathit{determinant}(H)}{\mathit{trace}(H)}$$

- The *trace* is the sum of the diagonals, i.e.,  $\mathit{trace}(H) = h_{11} + h_{22}$
- Very similar to  $\lambda_{\min}$  but less expensive (no square root)
- Called the “Harris Corner Detector” or “Harris Operator”
  - Actually the Noble variant of the Harris Corner Detector
- Lots of other detectors, this is one of the most popular


# Corner response function

$$R = \det(M) - \alpha \text{trace}(M)^2 = \lambda_1 \lambda_2 - \alpha(\lambda_1 + \lambda_2)^2$$

$\alpha$ : constant (0.04 to 0.15)

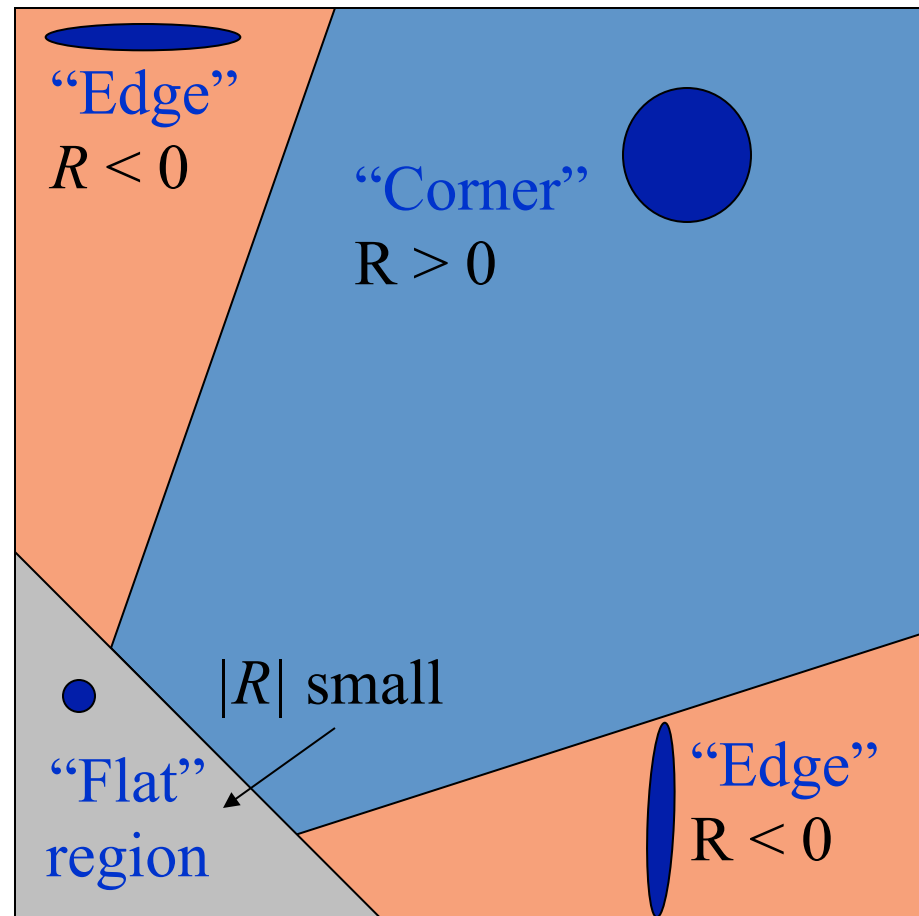

# The Harris operator

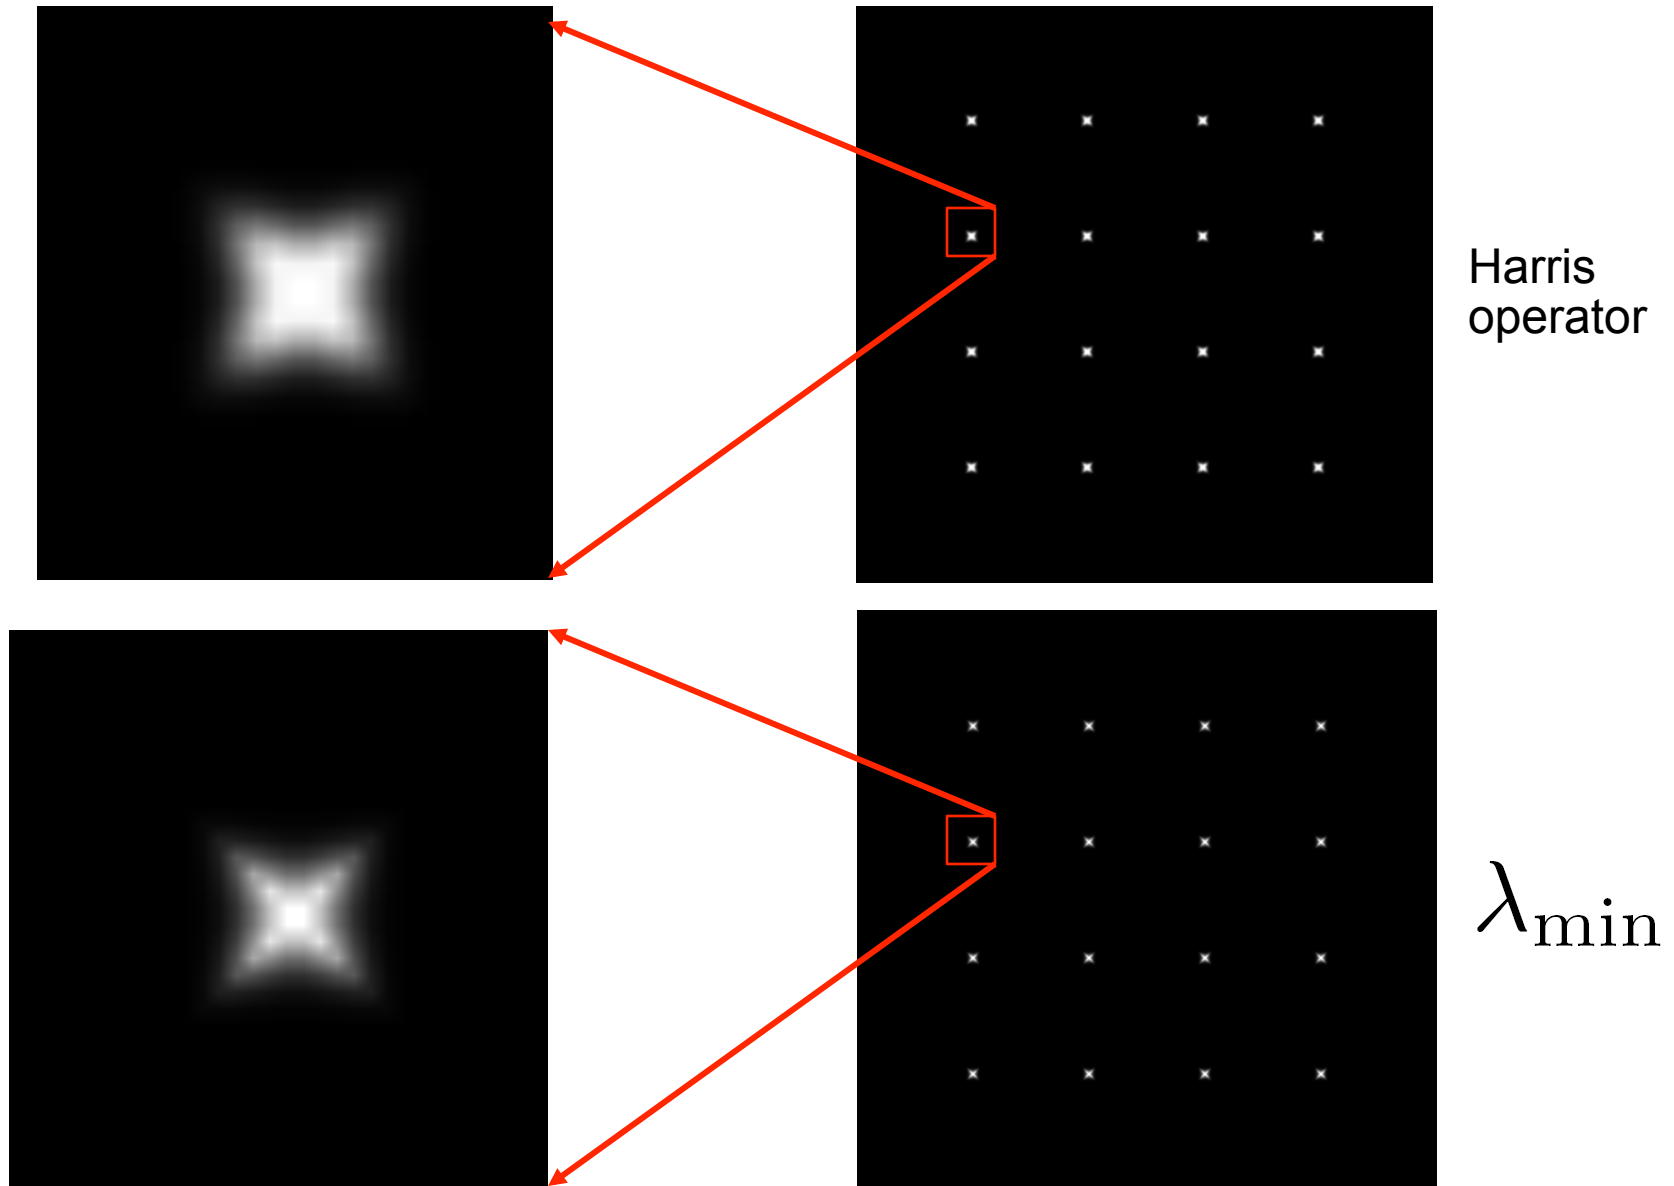

# Harris Detector [Harris88]



- Second moment matrix

$$\mu(\sigma_I, \sigma_D) = g(\sigma_I) * \begin{bmatrix} I_x^2(\sigma_D) & I_x I_y(\sigma_D) \\ I_x I_y(\sigma_D) & I_y^2(\sigma_D) \end{bmatrix}$$


$$\det M = \lambda_1 \lambda_2$$

$$\text{trace } M = \lambda_1 + \lambda_2$$

1. Image derivatives  
(optionally, blur first)

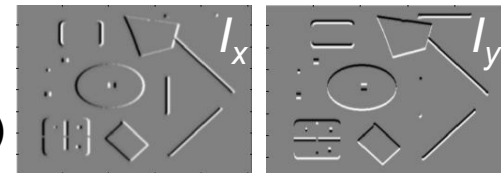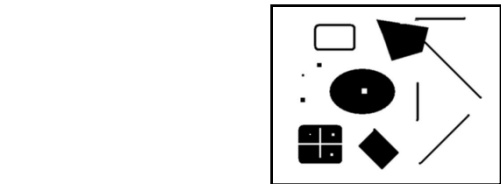

2. Square of derivatives

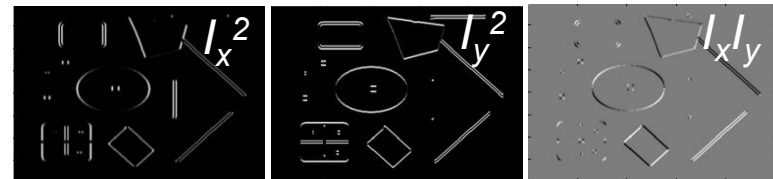


3. Gaussian filter  $g(\sigma_I)$



4. Cornerness function – both eigenvalues are strong

$$\text{har} = \det[\mu(\sigma_I, \sigma_D)] - \alpha[\text{trace}(\mu(\sigma_I, \sigma_D))]^2 = g(I_x^2)g(I_y^2) - [g(I_x I_y)]^2 - \alpha[g(I_x^2) + g(I_y^2)]^2$$

5. Non-maxima suppression

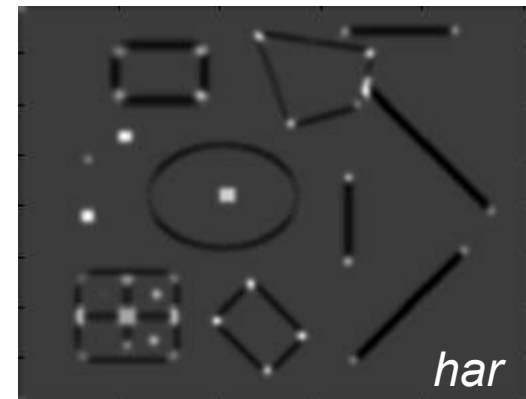


# Weighting the derivatives

- In practice, using a simple window  $W$  doesn't work too well

$$H = \sum_{(x,y) \in W} \begin{bmatrix} I_x^2 & I_x I_y \\ I_x I_y & I_y^2 \end{bmatrix}$$

- Instead, we'll *weight* each derivative value based on its distance from the center pixel

$$H = \sum_{(x,y) \in W} w_{x,y} \begin{bmatrix} I_x^2 & I_x I_y \\ I_x I_y & I_y^2 \end{bmatrix}$$




$w_{x,y}$


# Harris detector example



f value (red high, blue low)

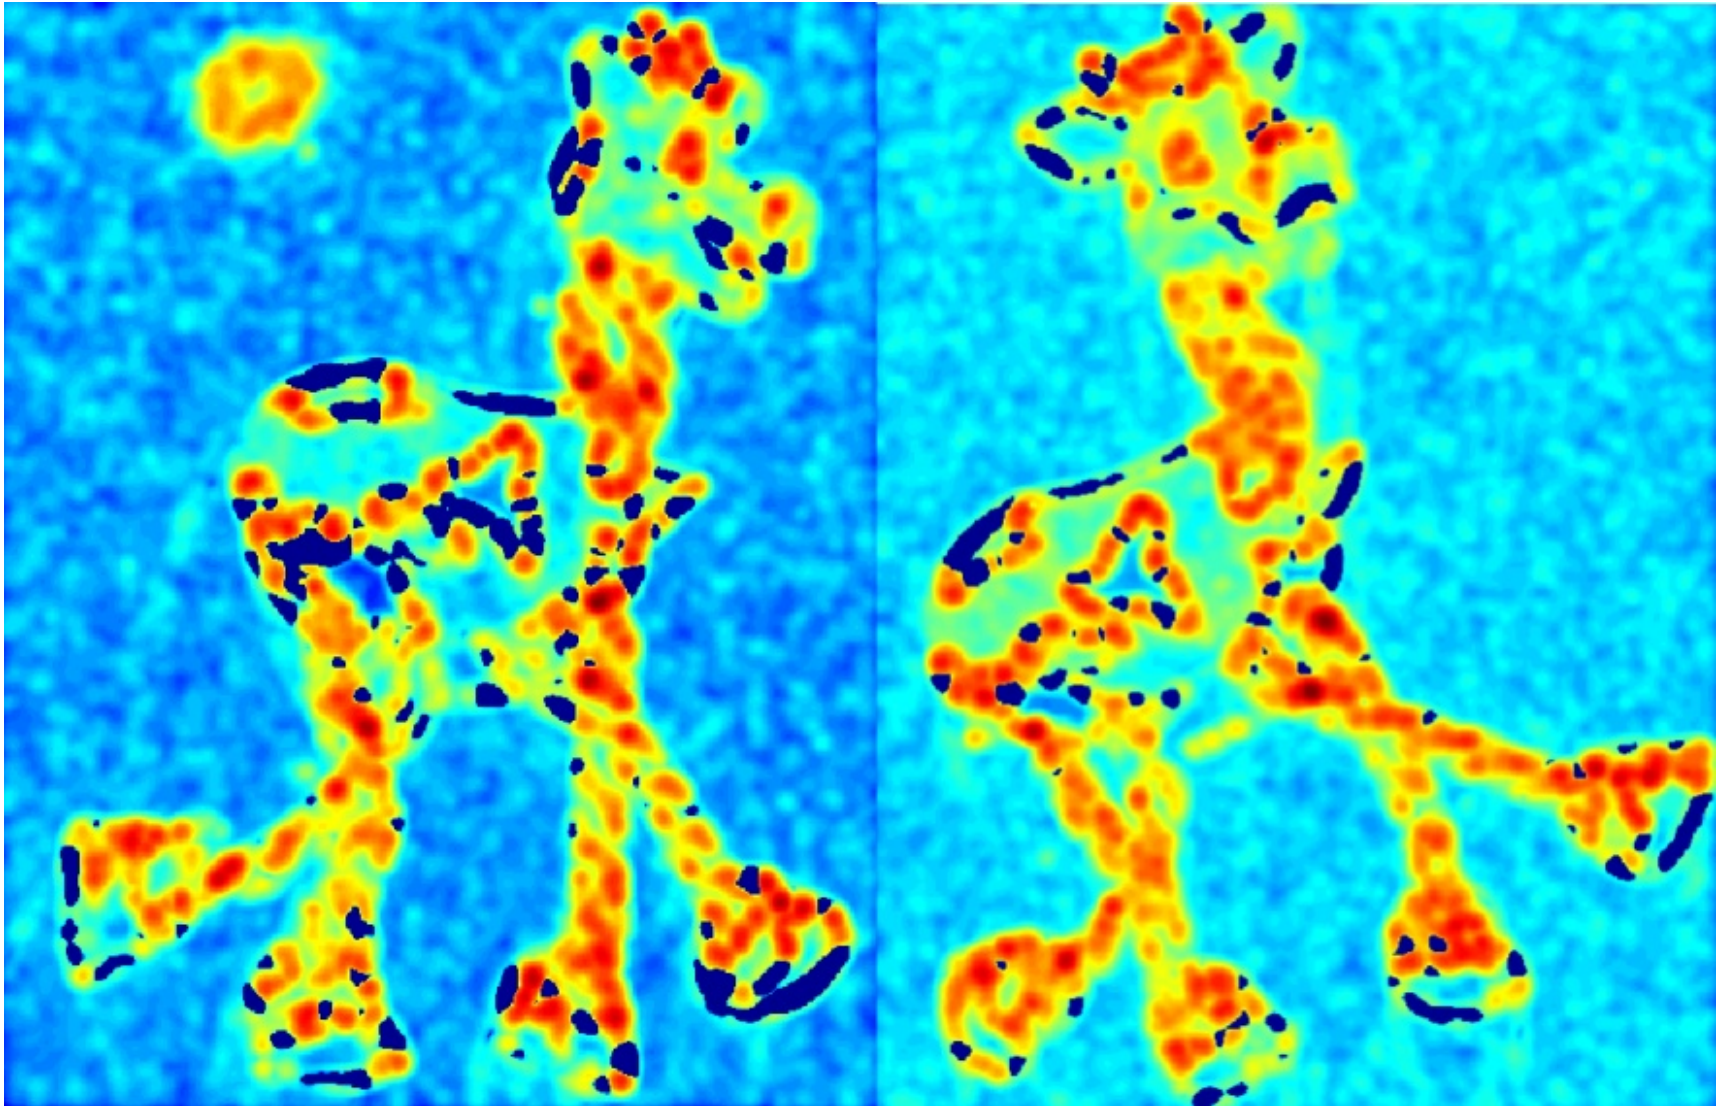


Threshold ( $f > \text{value}$ )

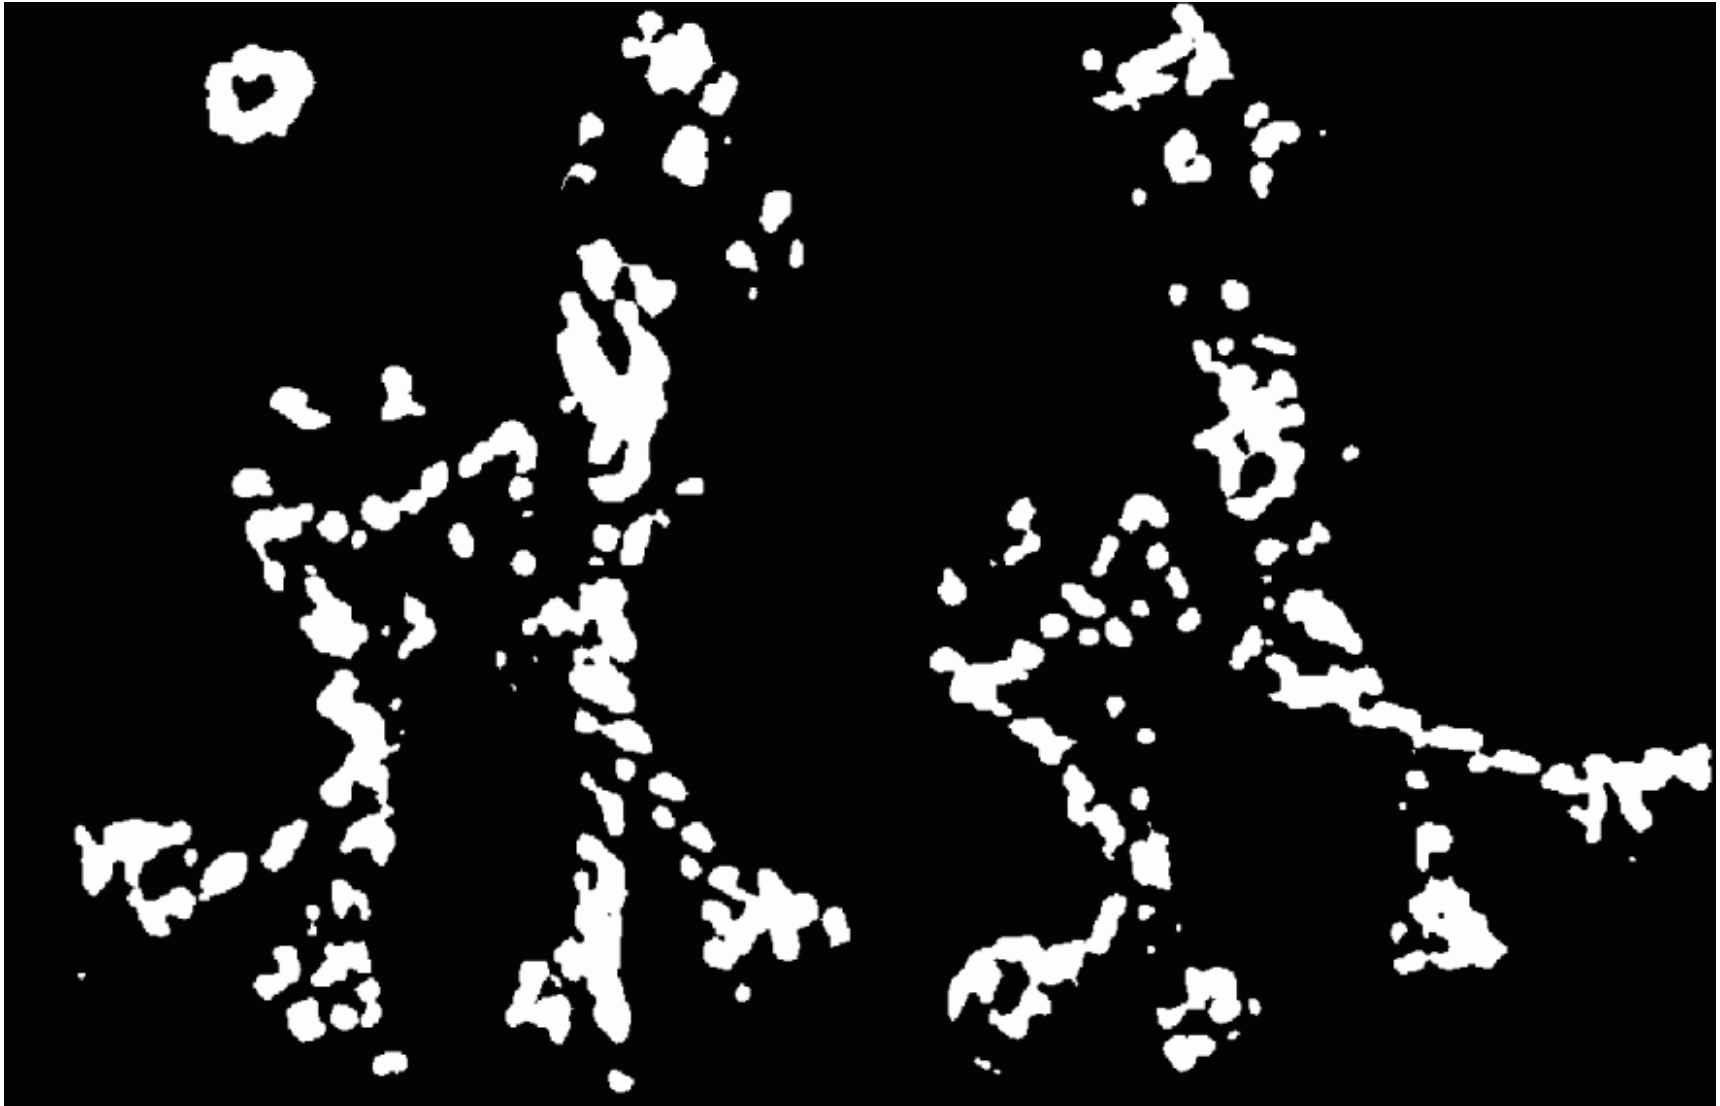



Find local maxima of  $f$

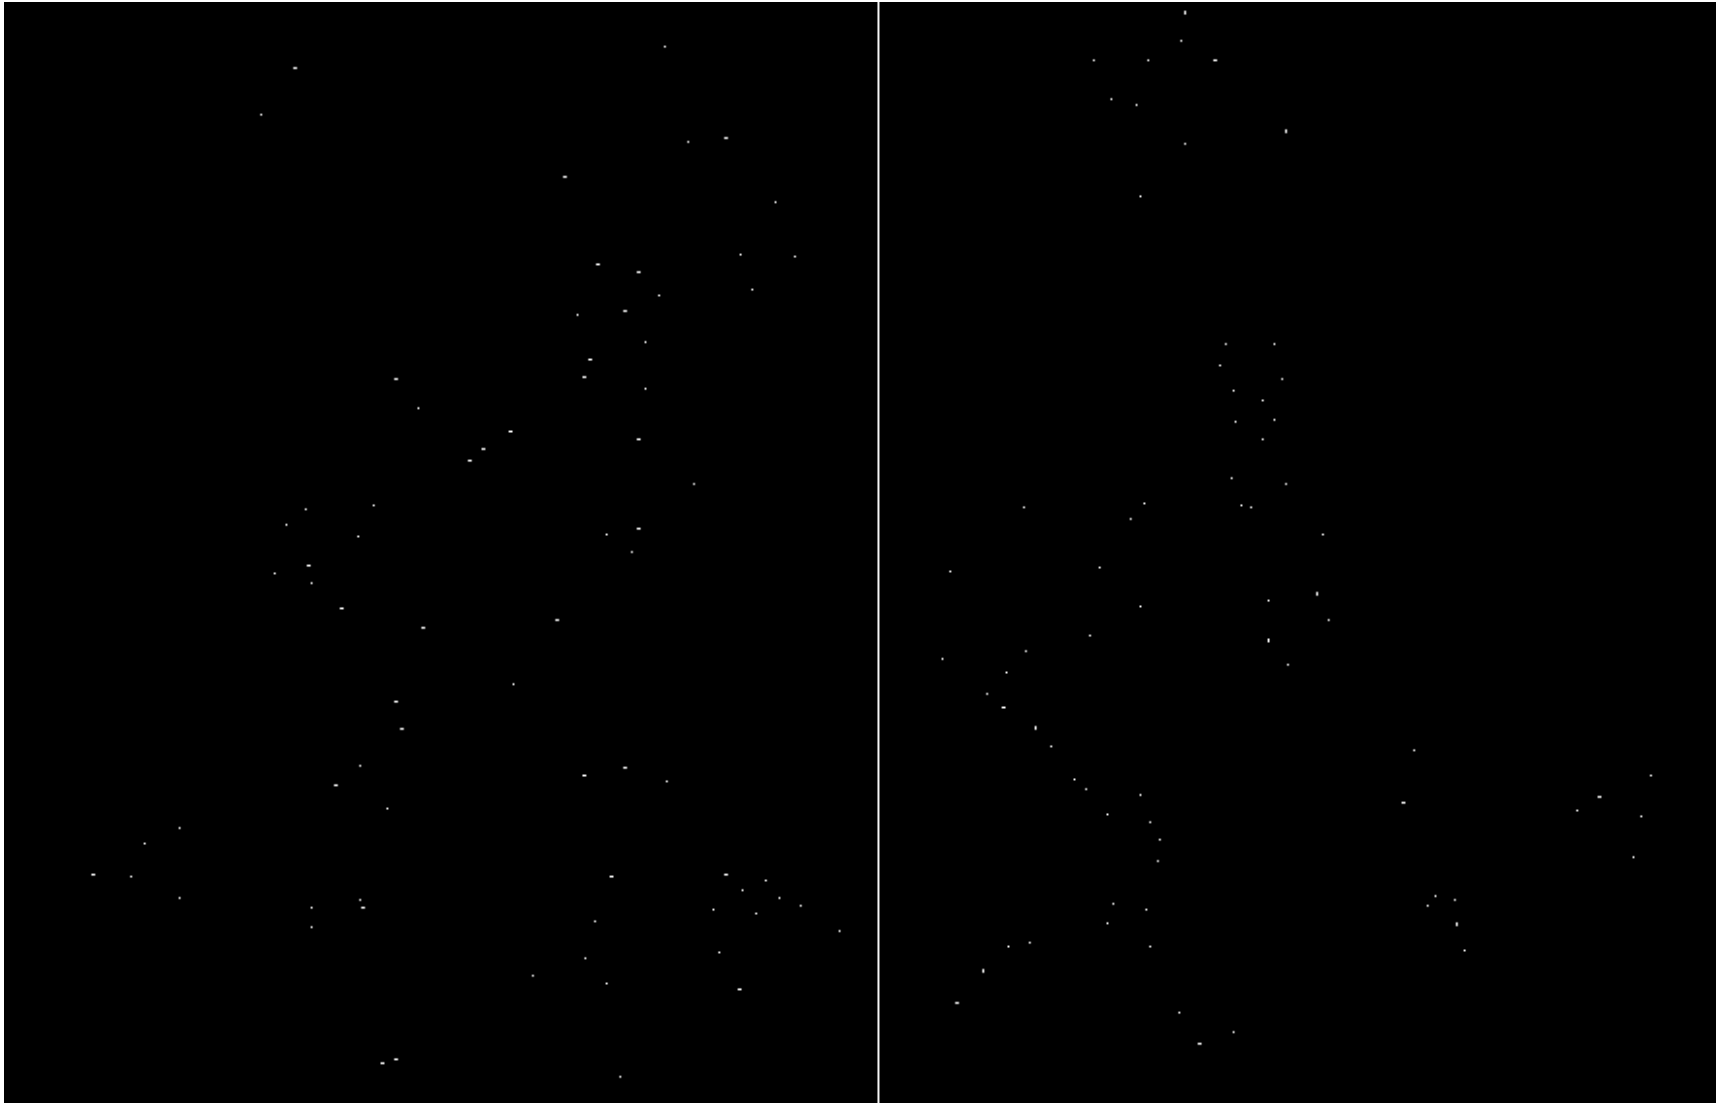

# Harris features (in red)

