



RECURSION

Lecture 8

CS2110 – Fall 2018

five items

2

Note: We've covered almost everything in Java! Just a few more things, which will be covered from time to time.

Remember to look at the exams page of course website and, if necessary, complete P1 Conflict on CMS or email Jenna by **THURSDAY NIGHT**

A1 grades are available.

**PLEASE READ YOUR
FEEDBACK!**

Mean: 93.9

Median: 97

**Recursion: Look at Java
Hypertext entry "recursion".**

Note: Remember to do the tutorial for this week's recitation. It is really important that you master this material.


About A3. linked list data structure

3

This is a linked list containing the list of integers (6, 7, 3).

header, containing size of list and pointer to first node

Each node (N@1, N@8, N@2) contains a value of the list and a pointer to next node (null if none)

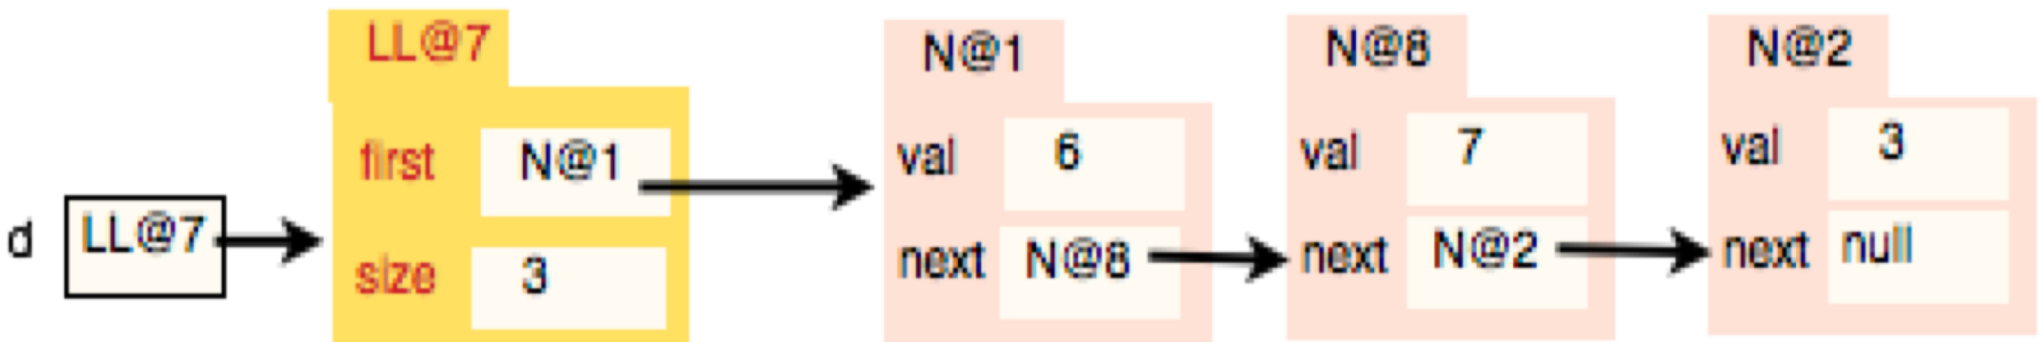

Why use linked list? Can insert a value at beginning of list with just a few instructions ---constant time

A3 introduces **generics**

4

Generic programming: a style of computer programming in which algorithms are written in terms of types to be specified later, which are then instantiated when needed for specific types .

A3 introduces **generics**

5

```
/** An instance maintains a set of some max size. */
```

```
public class TimeSet <E> { // E is a type parameter
    private Entry[] s; // The set elements are in s[0..n-1]
    private int n; // size of set.
```

new TimeSet(10)

This set can contain any values, e.g. {6, “xy”, 5.2, ‘a’}

new TimeSet<String>(10)

This set can contain only Strings, e.g. {“xy”, “a”}

```
}
```

A3 introduces **generics**

6

```
/** An instance maintains a set of some max size. */
```

```
public class TimeSet <E> { // E is a type parameter
```

```
    private Entry[] s; // The set elements are in s[0..n-1]
```

```
    private int n; // size of set.
```

```
}
```

A3 introduces inner classes

7

```
/** An instance represents a linked list ... */
```

```
public class TimeSet<E> { // E is a type parameter
    private Node first; // first node of list (null if size 0)
    private int size; // Number of values.
```

```
/** An instance holds an E element. */
```

```
private class Entry {
    private E val; // the element of type E
    private long t; // the time at which entry was created.
```


Note how type parameter E is used

```
}
```

```
new TimeSet<String> // E will be String
```


To Understand Recursion...

8

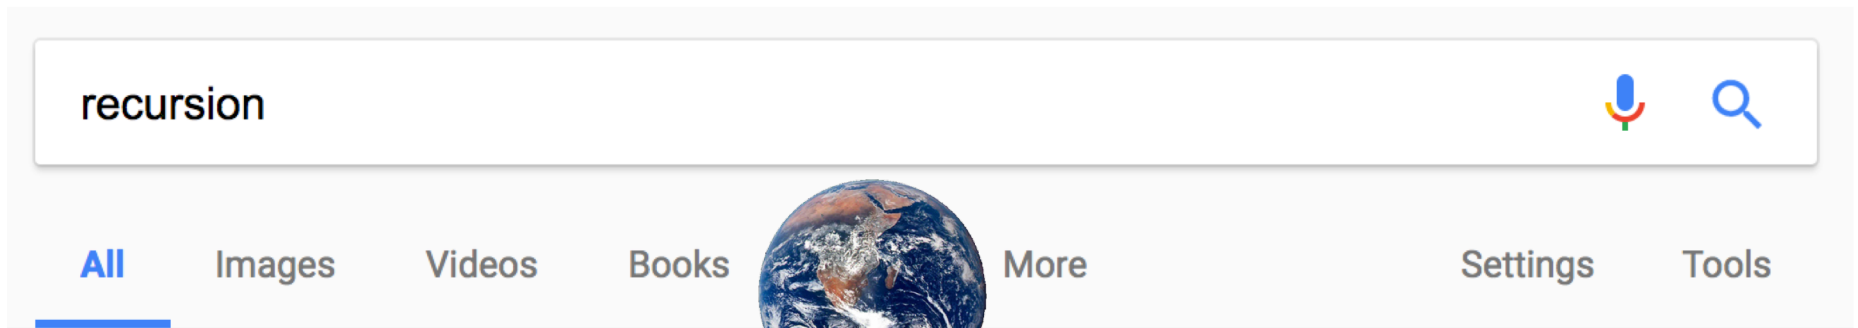

About 10,400,000 results (0.60 seconds)

Did you mean: *recursion*

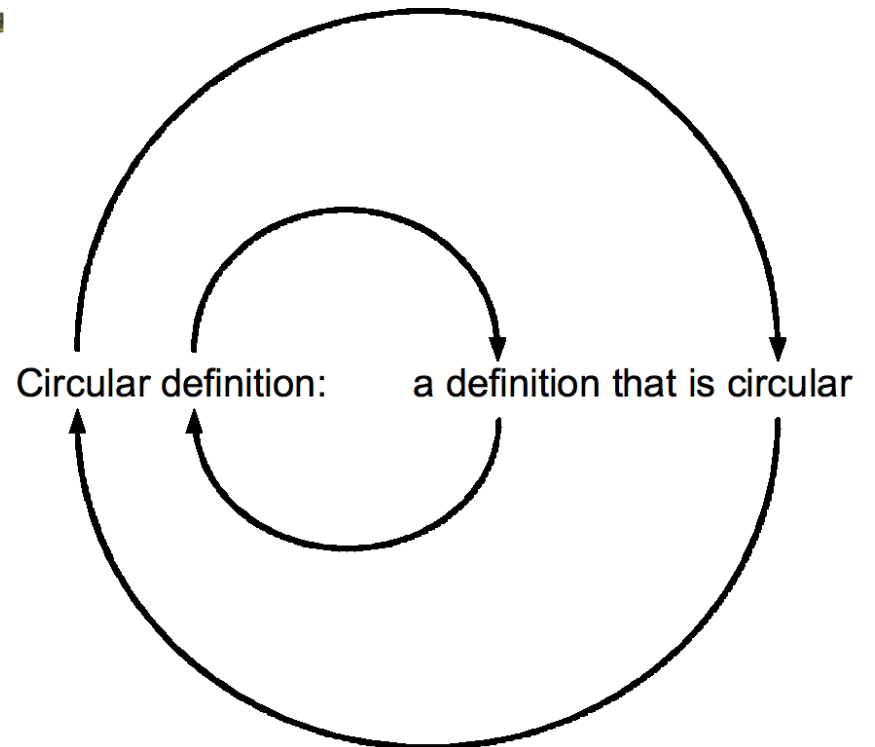

Recursion – Real Life Examples

9

<noun phrase> **is** <noun>, or

<adjective> <noun phrase>, or

<adverb> <noun phrase>

Example:

terrible horrible no-good very bad day

Recursion – Real Life Examples

10

<noun phrase> **is** <noun>, or

<adjective> <noun phrase>, or

<adverb> <noun phrase>

ancestor(p) **is** parent(p), or

parent(ancestor(p))

great great great great great great great great great great
great great grandmother.

$0! = 1$

$n! = n * (n-1)!$

1, 1, 2, 6, 24, 120, 720, 5050, 40320, 362880, 3628800, 39916800,
479001600...

Sum the digits in a non-negative integer

11

```
/** = sum of digits in n.  
 * Precondition: n >= 0 */  
public static int sum(int n) {  
    if (n < 10) return n;  
  
    // { n has at least two digits }  
    // return first digit + sum of rest  
    return n%10 + sum(n/10);  
}
```

sum calls itself!

$$\text{sum}(7) = 7$$

$$\begin{aligned}\text{sum}(8703) &= 3 + \text{sum}(870) \\ &= 3 + 8 + \text{sum}(70) \\ &= 3 + 8 + 7 + \text{sum}(0)\end{aligned}$$

Two different questions, two different answers

12

1. How is it **executed**?

(or, why does this even work?)

2. How do we **understand** recursive methods?


(or, how do we **write/develop** recursive methods?)

Stacks and Queues

13



stack grows

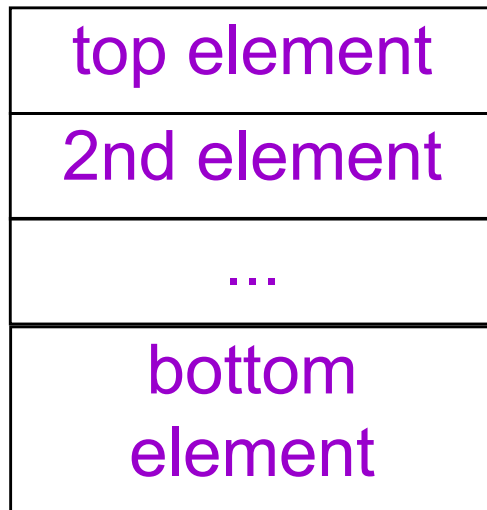

Americans wait in a line. The Brits wait in a queue !

Stack: list with (at least) two basic ops:

- * Push an element onto its top
- * Pop (remove) top element

Last-In-First-Out (LIFO)

Like a stack of trays in a cafeteria

Queue: list with (at least) two basic ops:

- * Append an element
- * Remove first element

First-In-First-Out (FIFO)


Stack Frame

14

A “frame” contains information about a method call:

At runtime Java maintains a **stack** that contains frames for all method calls that are being executed but have not completed.

a frame

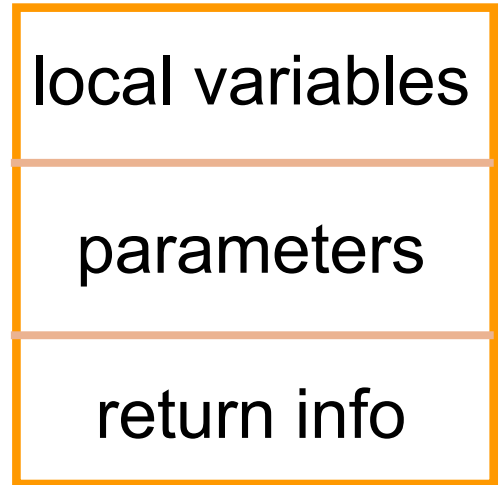

Method call: push a frame for call on **stack**. Assign argument values to parameters. Execute method body. Use the frame for the call to reference local variables and parameters.

End of method call: pop its frame from the **stack**; if it is a function leave the return value on top of **stack**.

Memorize method call execution!

16

A frame for a call contains parameters, local variables, and other information needed to properly execute a method call.

To execute a method call:

1. push a frame for the call on the stack,
2. assign argument values to parameters,
3. execute method body,
4. pop frame for call from stack, and (for a function) push returned value on stack

When executing method body look in frame for call for parameters and local variables.

Frames for methods sum main method in the system

17

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

Frame for method in the system
that calls method main

frame:

n ____
return info

frame:

r ____ args ____
return info

frame:

?
return info

Example: Sum the digits in a non-negative integer


18

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

Frame for method in the system that calls method main: main is then called

main

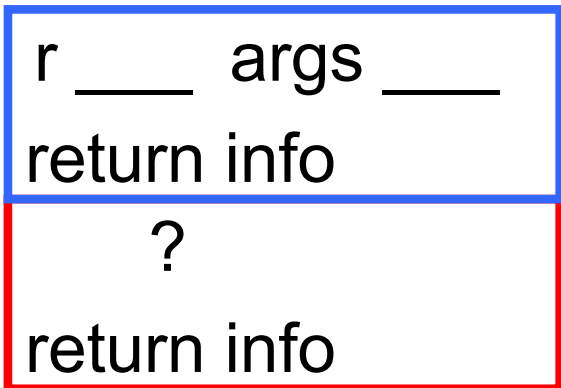

system

Memorize method call execution!

19

To execute a method call:

1. push a frame for the call on the stack,
2. assign argument values to parameters,
3. execute method body,
4. pop frame for call from stack, and (for a function) push returned value on stack

The following slides step through execution of a recursive call to demo execution of a method call.

Here, we demo using: www.pythontutor.com/visualize.html

Caution: the frame shows not ALL local variables but only those whose scope has been entered and not left.

Example: Sum the digits in a non-negative integer


20

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

Method main calls sum:

main

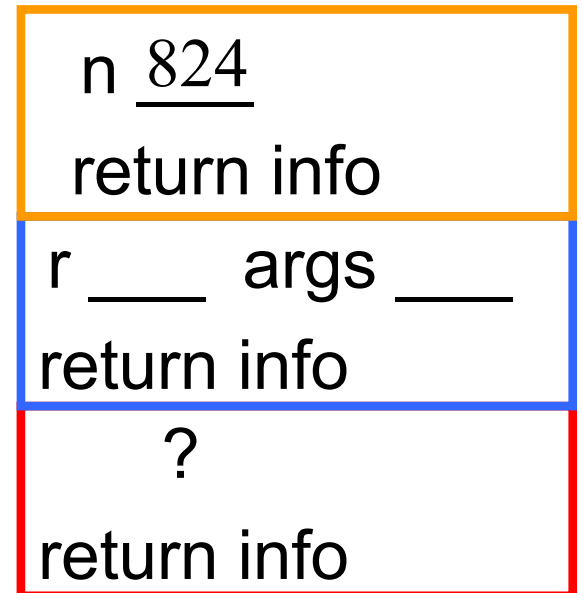

system

Example: Sum the digits in a non-negative integer

21

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

$n \geq 10$ sum calls sum:

main

system

n 82

return info

n 824

return info

r ____ args ____

return info

?

return info

Example: Sum the digits in a non-negative integer

22


```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

$n \geq 10$. sum calls sum:

main

system

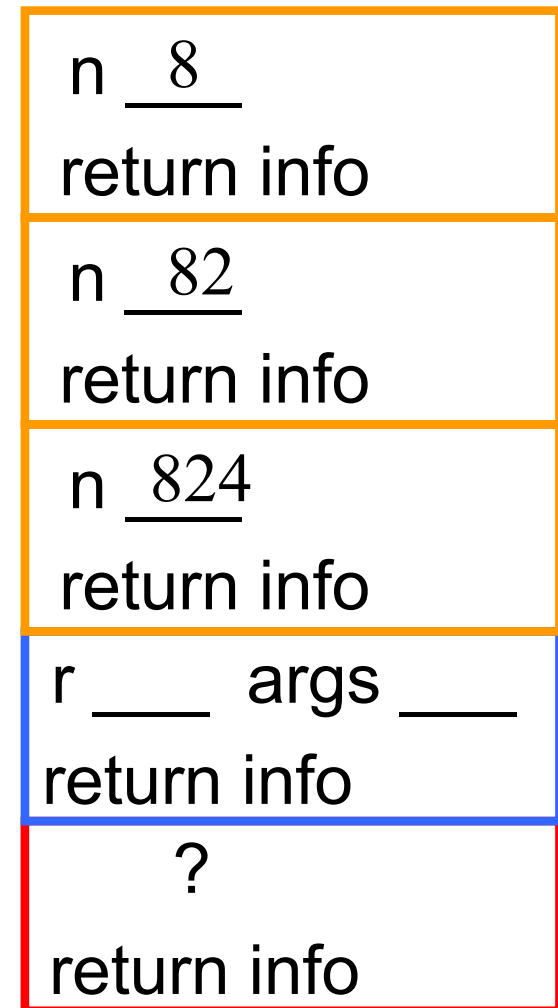


Example: Sum the digits in a non-negative integer

23

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

n < 10 sum stops: frame is popped
and n is put on stack:

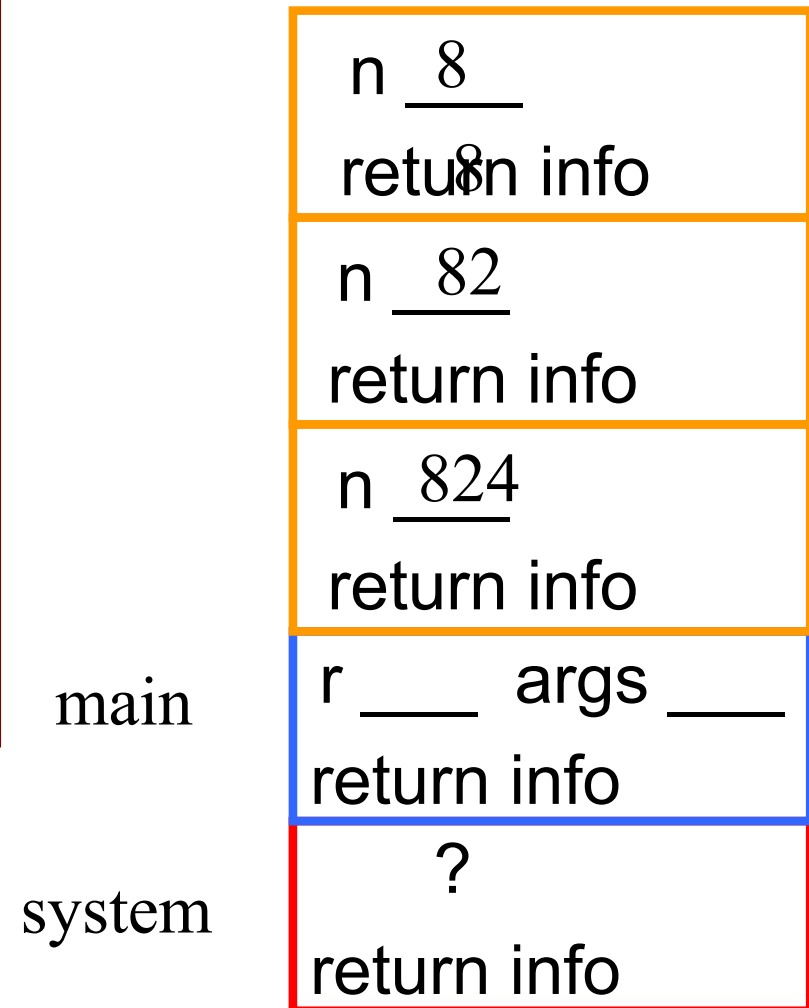


Example: Sum the digits in a non-negative integer

24

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

main

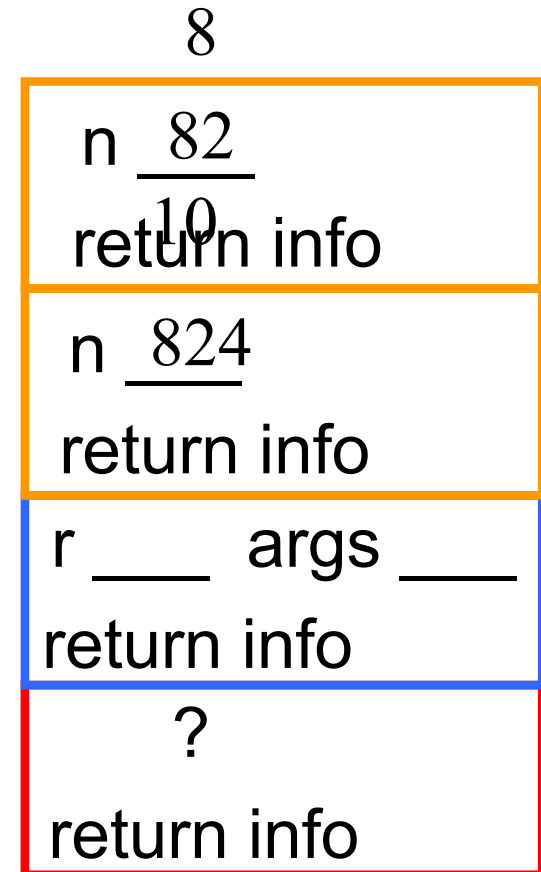

Using return value 8 stack computes
 $2 + 8 = 10$ pops frame from stack puts
return value 10 on stack

Example: Sum the digits in a non-negative integer


25

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

main

10

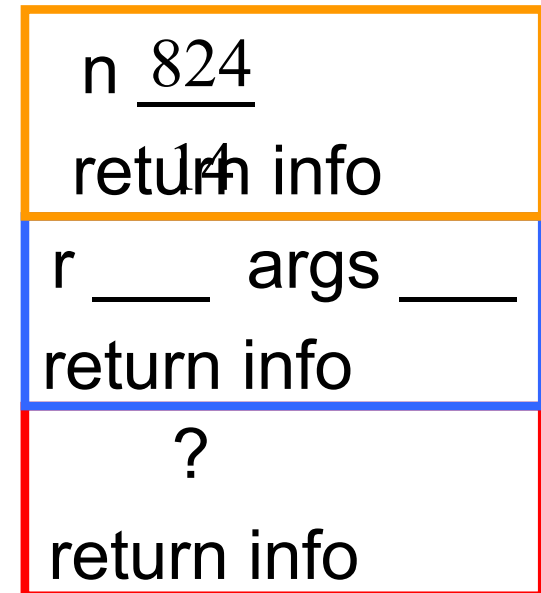

Using return value 10 stack computes
4 + 10 = 14 pops frame from stack
puts return value 14 on stack

Example: Sum the digits in a non-negative integer


26

```
public static int sum(int n) {  
    if (n < 10) return n;  
    return n%10 + sum(n/10);  
}
```

```
public static void main(  
    String[] args) {  
    int r= sum(824);  
    System.out.println(r);  
}
```

Using return value 14 main stores
14 in r and removes 14 from stack

main

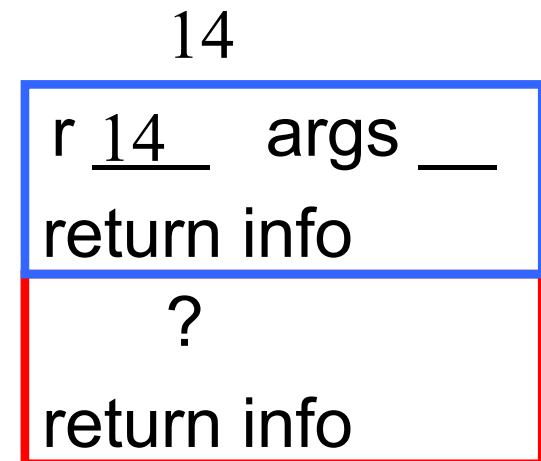

Poll time!

Two different questions, two different answers

28

1. How is it **executed**?

(or, why does this even work?)

It's **not** magic! Trace the code's execution using the method call algorithm, drawing the stack frames as you go.

Use only to gain understanding / assurance that recursion works.

2. How do we **understand** recursive methods?

(or, how do we **write/develop** recursive methods?)

This requires a totally different approach.

Back to Real Life Examples

29

Factorial function:

$$0! = 1$$

$$n! = n * (n-1)! \text{ for } n > 0$$

$$\text{(e.g.: } 4! = 4*3*2*1=24\text{)}$$

Exponentiation:

$$b^0 = 1$$

$$b^c = b * b^{c-1} \text{ for } c > 0$$

Easy to make math definition into a Java function!

```
public static int fact(int n) {  
    if (n == 0) return 1;  
  
    return n * fact(n-1);  
}
```

```
public static int exp(int b, int c) {  
    if (c == 0) return 1;  
  
    return b * exp(b, c-1);  
}
```

How to understand what a call does

30

Make a copy of the method spec,
replacing the parameters of the
method by the arguments

spec says that the
value of a call
equals the sum of
the digits of n

sumDigs(654)

sum of digits of **n**

sum of digits of **654**

```
/** = sum of the digits of n.  
 * Precondition:  $n \geq 0$  */  
public static int sumDigs(int n) {  
    if ( $n < 10$ ) return n;  
    // n has at least two digits  
    return  $n \% 10 + \text{sumDigs}(n/10)$ ;  
}
```

Understanding a recursive method

31

Step 1. Have a **precise spec!**

Step 2. Check that the method works in **the base case(s)**: That is, Cases where the parameter is small enough that the result can be computed simply and without recursive calls.

If $n < 10$ then n consists of a single digit.

Looking at the spec we see that that digit is the required sum.

```
/** = sum of the digits of n.  
 * Precondition: n >= 0 */  
public static int sumDigs(int n) {  
    if (n < 10) return n;  
    // n has at least two digits  
    return n%10 + sumDigs(n/10);  
}
```

Understanding a recursive method

32

Step 1. Have a precise spec!

Step 2. Check that the method works in **the base case(s)**.

Step 3. Look at the **recursive case(s)**. In your mind replace each recursive call by what it

does according to the method spec and verify that the correct result is then obtained.

return $n \% 10 + \text{sum}(n/10);$

return $n \% 10 + (\text{sum of digits of } n/10);$ // e.g. $n = 843$

```
/** = sum of the digits of n.  
 * Precondition: n >= 0 */  
public static int sumDigs(int n) {  
    if (n < 10) return n;  
    // n has at least two digits  
    return  $n \% 10 + \text{sumDigs}(n/10);$   
}
```

Understanding a recursive method

33

Step 1. Have a precise spec!

Step 2. Check that the method works in **the base case(s)**.

Step 3. Look at the **recursive case(s)**. In your mind replace each recursive call by what it does acc. to the spec and verify correctness.

Step 4. (No infinite recursion) Make sure that the args of recursive calls are in some sense smaller than the pars of the method.

$n/10 < n$, so it will get smaller until it has one digit

```
/** = sum of the digits of n.  
 * Precondition: n >= 0 */  
public static int sumDigs(int n) {  
    if (n < 10) return n;  
    // n has at least two digits  
    return n%10 + sumDigs(n/10);  
}
```


Understanding a recursive method

34

Step 1. Have a precise spec!

Important! Can't do step 3 without precise spec.

Step 2. Check that the method works in **the base case(s)**.

Step 3. Look at the **recursive case(s)**. In your mind replace each recursive call by what it does according to the spec and verify correctness.

Once you get the hang of it this is what makes recursion easy! This way of thinking is based on math induction which we don't cover in this course.

Step 4. (No infinite recursion) Make sure that the args of recursive calls are in some sense smaller than the parameters of the method

Writing a recursive method

Step 1. Have a precise spec!

Step 2. Write the **base case(s)**: Cases in which no recursive calls are needed. Generally for “small” values of the parameters.

Step 3. Look at all other cases. See how to define these cases in terms **of smaller problems of the same kind**. Then implement those definitions using recursive calls for those **smaller problems of the same kind**. Done suitably, point 4 (about termination) is automatically satisfied.

Step 4. (No infinite recursion) Make sure that the args of recursive calls are in some sense smaller than the parameters of the method

Two different questions, two different answers

36

2. How do we **understand** recursive methods?

(or, how do we **write/develop** recursive methods?)

Step 1. Have a precise **spec**!

Step 2. Check that the method works in **the base case(s)**.

Step 3. Look at the **recursive case(s)**. In your mind replace each recursive call by what it does according to the spec and verify correctness.

Step 4. (No infinite recursion) Make sure that the args of recursive calls are in some sense smaller than the parameters of the method

Examples of writing recursive functions

37

For the rest of the class we demo writing recursive functions using the approach outlined below. The java file we develop will be placed on the course webpage some time after the lecture.

Step 1. Have a precise **spec!**

Step 2. Write the **base case(s)**.

Step 3. Look at all other cases. See how to define these cases in terms **of smaller problems of the same kind**. Then implement those definitions using recursive calls for those **smaller problems of the same kind**.

Step 4. Make sure recursive calls are “smaller” (no infinite recursion).

Check palindrome-hood

38

A String palindrome is a String that reads the same backward and forward:

`isPal("racecar")` → true `isPal("pumpkin")` → false

A String with at least two characters is a palindrome if

- (0) its first and last characters are equal and
- (1) chars between first & last form a palindrome:

e.g. AMANAPLANACANALPANAMA

have to be the same

have to be a palindrome


A recursive definition!

- A man a plan a caret a ban a myriad a sum a lac a liar a hoop a pint a catalpa a gas an oil a bird a yell a vat a caw a pax a wag a tax a nay a ram a cap a yam a gay a tsar a wall a car a luger a ward a bin a woman a vassal a wolf a tuna a nit a pall a fret a watt a bay a daub a tan a cab a datum a gall a hat a fag a zap a say a jaw a lay a wet a gallop a tug a trot a trap a tram a torr a caper a top a tonk a toll a ball a fair a sax a minim a tenor a bass a passer a capital a rut an amen a ted a cabal a tang a sun an ass a maw a sag a jam a dam a sub a salt an axon a sail an ad a wadi a radian a room a rood a rip a tad a pariah a revel a reel a reed a pool a plug a pin a peek a parabola a dog a pat a cud a nu a fan a pal a rum a nod an eta a lag an eel a batik a mug a mot a nap a maxim a mood a leek a grub a gob a gel a drab a citadel a total a cedar a tap a gag a rat a manor a bar a gal a cola a pap a yaw a tab a raj a gab a nag a pagan a bag a jar a bat a way a papa a local a gar a baron a mat a rag a gap a tar a decal a tot a led a tic a bard a leg a bog a burg a keel a doom a mix a map an atom a gum a kit a baleen a gala a ten a don a mural a pan a faun a ducat a pagoda a lob a rap a keep a nip a gulp a loop a deer a leer a lever a hair a pad a tapir a door a moor an aid a raid a wad an alias an ox an atlas a bus a madam a jag a saw a mass an anus a gnat a lab a cadet an em a natural a tip a caress a pass a baronet a minimax a sari a fall a ballot a knot a pot a rep a carrot a mart a part a tort a gut a poll a gateway a law a jay a sap a zag a fat a hall a gamut a dab a can a tabu a day a batt a waterfall a patina a nut a flow a lass a van a mow a nib a draw a regular a call a war a stay a gam a yap a cam a ray an ax a tag a wax a paw a cat a valley a drib a lion a saga a plat a catnip a pooh a rail a calamus a dairyman a bater a canal Panama

Example: Is a string a palindrome?

40

```
/** = "s is a palindrome" */  
public static boolean isPal(String s) {  
    if (s.length() <= 1)  
        return true;  
  
    // { s has at least 2 chars }  
    int n= s.length()-1;  
    return s.charAt(0) == s.charAt(n) && isPal(s.substring(1,n));  
}
```

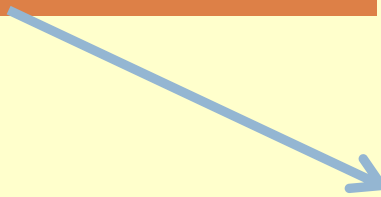

**Substring from
s[1] to s[n-1]**

The Fibonacci Function

41

Mathematical definition:

$$\begin{aligned} \text{fib}(0) &= 0 \\ \text{fib}(1) &= 1 \\ \text{fib}(n) &= \text{fib}(n-1) + \text{fib}(n-2) \quad n \geq 2 \end{aligned}$$

two base cases!

Fibonacci sequence: 0 1 1 2 3 5 8 13 ...

```
/** = fibonacci(n). Pre: n >= 0 */
static int fib(int n) {
    if (n <= 1) return n;
    // { 1 < n }
    return fib(n-1) + fib(n-2);
}
```



Fibonacci (Leonardo Pisano) 1170-1240?


Statue in Pisa Italy
Giovanni Paganucci
1863

Example: Count the e's in a string

42

```
/** = number of times c occurs in s */  
public static int countEm(char c, String s) {  
    if (s.length() == 0) return 0;  
    // { s has at least 1 character }  
    if (s.charAt(0) != c)  
        return countEm(c, s.substring(1));  
    // { first character of s is c }  
    return 1 + countEm (c, s.substring(1));  
}
```

substring s[1..]
i.e. s[1] ...
s(s.length()-1)

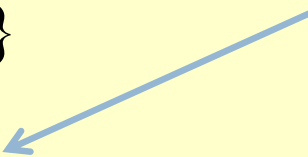

- `countEm('e', "it is easy to see that this has many e's") = 4`
- `countEm('e', "Mississippi") = 0`