



ADTS, GRAMMARS, PARSING, TREE TRAVERSALS

Lecture 13
CS2110 – Spring 2016

Prelim 1

2

- Where: Kennedy Auditorium
- When:
 - ▣ A-Lib: 5:30-7
 - ▣ Lie-Z: 7:30-9
 - ▣ (unless we explicitly notified you otherwise)

Pointers to material


3

- ▣ Parse trees: text, section 23.36
- ▣ Definition of Java Language, sometimes useful:
docs.oracle.com/javase/specs/jls/se8/html/index.html
- ▣ Grammar for most of Java, for those who are curious:
docs.oracle.com/javase/specs/jls/se8/html/jls-18.html
- ▣ Tree traversals –preorder, inorder, postorder: text, sections 23.13 .. 23.15.

Expression trees

4

Can draw a tree for $2 * 3 - (1 + 2 * 4)$

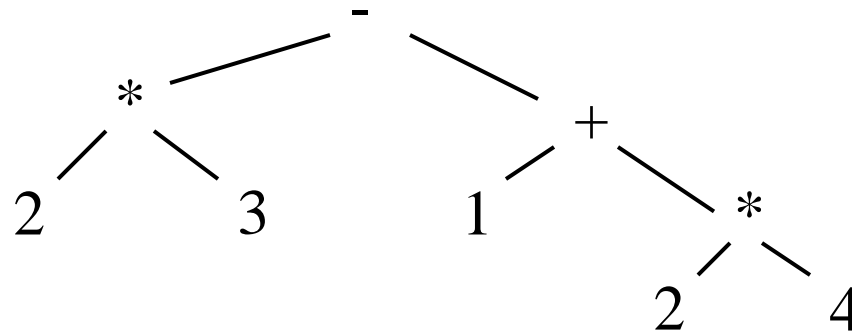


```
public abstract class Exp {  
    /* return the value of this Exp */  
    public abstract int eval();  
}
```

Expression trees

5


```
public abstract class Exp {  
    /* return the value of this Exp */  
    public abstract int eval();  
}
```



```
public class Int extends Exp {  
    int v;  
    public int eval() {  
        return v;  
    }  
}
```

```
public class Add extends Exp {  
    Exp left;  
    Exp right;  
    public int eval() {  
        return left.eval() + right.eval();  
    }  
}
```

tree for $(2 + 3) * (1 + 4)$

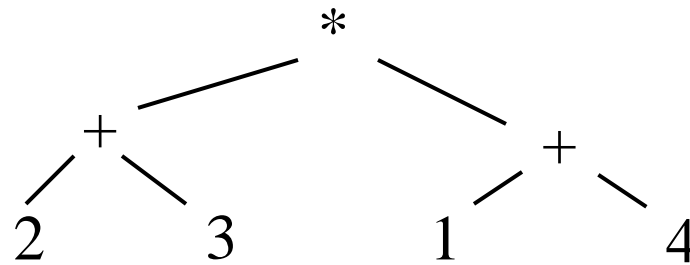

Preorder traversal:

1. Visit the root
2. Visit left subtree, in preorder
3. Visit right subtree, in preorder


* + 2 3 + 1 4

prefix and postfix notation
proposed by Jan
Lukasiewicz in 1951

Postfix (we see it later) is
often called **RPN** for
Reverse Polish Notation



tree for $(2 + 3) * (1 + 4)$

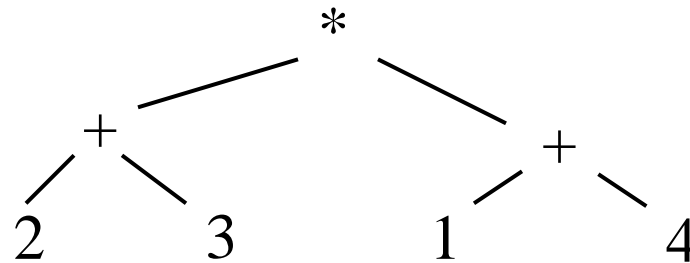

In about 1974, Gries paid \$300 for an HP calculator, which had some memory and **used postfix notation!** Still works. Come up to see it.

Postorder traversal:

1. Visit left subtree, in postorder
2. Visit right subtree, in postorder
3. Visit the root

$2\ 3\ +\ 1\ 4\ +\ *$

Postfix notation


tree for $(2 + 3) * (1 + 4)$

Postfix is easy to compute.
Process elements left to
right.

Number? Push it on a stack

Binary operator? Remove
two top stack elements,
apply operator to it, push
result on stack


Unary operator? Remove
top stack element, apply
operator to it, push result on
stack

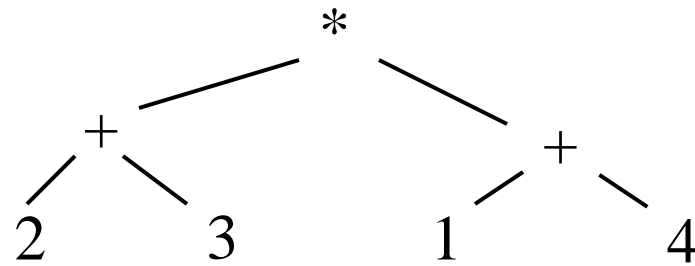

Postfix notation

2 3 + 1 4 + *

tree for $(2 + 3) * (1 + 4)$

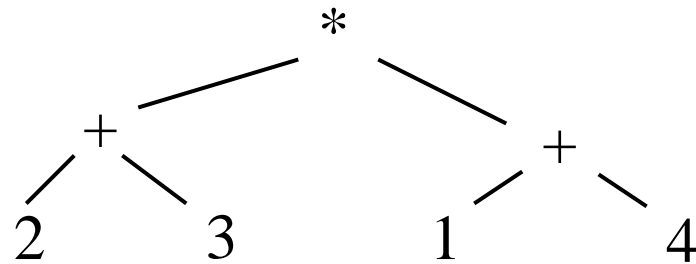

Inorder traversal:

1. Visit left subtree, in inorder
2. Visit the root
3. Visit right subtree, in inorder

To help out, put parens around expressions with operators

$$(2 + 3) * (1 + 4)$$

Expression trees

10

```
public class Add extends Exp {  
    Exp left;  
    Exp right;
```

```
    /** Return the value of this exp. */
```

```
    public int eval() {return left.eval() + right.eval();}
```

```
    /** Return the preorder.*/
```

```
    public String pre() {return "+" + left.pre() + right.pre(); }
```

```
    /** Return the postorder.*/
```

```
    public String post() {return left.post() + right.post() + "+ "; }
```

```
}
```

```
public abstract class Exp {  
    public abstract int eval();  
    public abstract String pre();  
    public abstract String post();  
}
```

Motivation for grammars

11

- The cat ate the rat.
- The cat ate the rat slowly.
- The small cat ate the big rat slowly.
- The small cat ate the big rat on the mat slowly.
- The small cat that sat in the hat ate the big rat on the mat slowly, then got sick.
- ...

- Not all sequences of words are legal sentences

The ate cat rat the

- How many legal sentences are there?
- How many legal Java programs?
- How do we know what programs are legal?

<http://docs.oracle.com/javase/specs/jls/se8/html/index.html>

A Grammar

12

Sentence → Noun Verb Noun

Noun → boys

Noun → girls

Noun → bunnies

Verb → like

| see

- White space between words does not matter
- A very boring grammar because the set of Sentences is finite (exactly 18 sentences)

Our sample grammar has these rules:

A Sentence can be a Noun followed by a Verb followed by a Noun

A Noun can be boys or girls or bunnies

A Verb can be like or see

A Grammar

13

Sentence → Noun Verb Noun

Noun → boys

Noun → girls

Noun → bunnies

Verb → like

Verb → see

Grammar: set of rules for generating sentences of a language.

Examples of Sentence:

- girls see bunnies
- bunnies like boys

- The words boys, girls, bunnies, like, see are called *tokens or terminals*
- The words Sentence, Noun, Verb are called *nonterminals*

A recursive grammar

14

Sentence → Sentence and Sentence

Sentence → Sentence or Sentence

Sentence → Noun Verb Noun

Noun → boys

Noun → girls

Noun → bunnies

Verb → like

| see

This grammar is more interesting than previous one because the set of Sentences is infinite

What makes this set infinite?

Answer:

Recursive definition of Sentence

Detour

15

What if we want to add a period at the end of every sentence?

Sentence → Sentence and Sentence .

Sentence → Sentence or Sentence .

Sentence → Noun Verb Noun .

Noun → ...

Does this work?

No! This produces sentences like:

girls like boys . and boys like bunnies . .

Sentence Sentence

Sentence

Sentences with periods

16

PunctuatedSentence → Sentence .

Sentence → Sentence and Sentence

Sentence → Sentence or Sentence

Sentence → Noun VerbNoun

Noun → boys

Noun → girls

Noun → bunnies

Verb → like

Verb → see

- New rule adds a period only at end of sentence.
- Tokens are the 7 words plus the period (.)
- Grammar is ambiguous:

**boys like girls
and girls like boys
or girls like bunnies**

Grammars for programming languages

17

Grammar describes every possible legal expression

You could use the grammar for Java to list every possible Java program. (It would take forever.)

Grammar tells the Java compiler how to “parse” a Java program

docs.oracle.com/javase/specs/jls/se8/html/jls-2.html#jls-2.3

Grammar for simple expressions (not the best)

18

$E \rightarrow \text{integer}$

$E \rightarrow (E + E)$

Simple expressions:

- An E can be an integer.
- An E can be '(' followed by an E followed by '+' followed by an E followed by ')'

Set of expressions defined by this grammar is a recursively-defined set

- Is language finite or infinite?
- Do recursive grammars always yield infinite languages?

Some legal expressions:

- 2
- (3 + 34)
- ((4+23) + 89)

Some illegal expressions:

- (3
- 3 + 4

Tokens of this grammar:

(+) and any **integer**

Parsing

$E \rightarrow \text{integer}$

$E \rightarrow (E + E)$


19

Use a grammar in two ways:

- A grammar defines a *language* (i.e. the set of properly structured *sentences*)
- A grammar can be used to *parse a sentence* (thus, checking if a string is *a sentence* is in the *language*)

To *parse* a sentence is to build a *parse tree*: much like diagramming a sentence

- Example: Show that $((4+23) + 89)$ is a valid expression E by building a *parse tree*


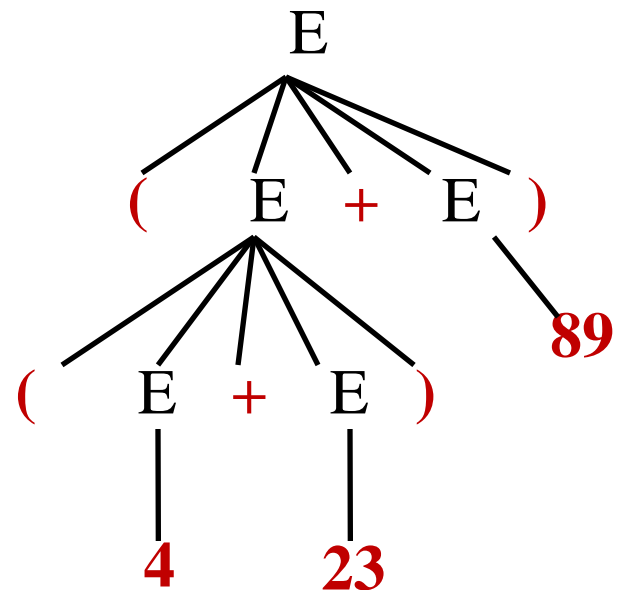


Ambiguity

20

Grammar is ambiguous if it allows two parse trees for a sentence. The grammar below, using no parentheses, is ambiguous. The two parse trees to right show this. We don't know which + to evaluate first in the expression $1 + 2 + 3$

$E \rightarrow \text{integer}$
 $E \rightarrow E + E$

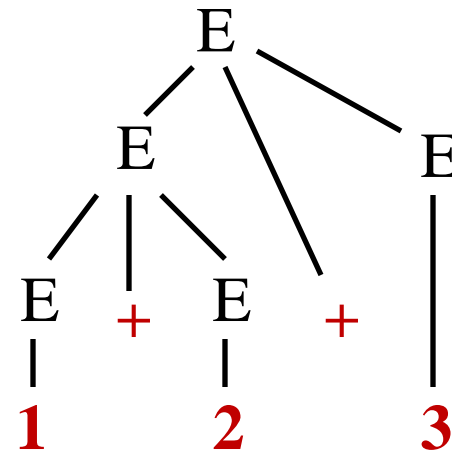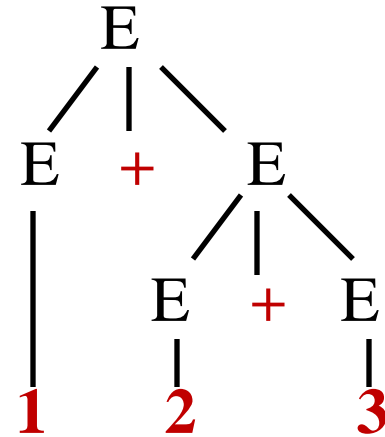

Recursive descent parsing

21

Write a set of mutually *recursive methods* to check if a sentence is in the language (show how to generate parse tree later).

One method for each nonterminal of the grammar. The method is completely determined by the rules for that nonterminal. On the next pages, we give a high-level version of the method for nonterminal **E**:

$E \rightarrow \text{integer}$

$E \rightarrow (E + E)$

Parsing an E

$E \rightarrow \text{integer}$
 $E \rightarrow (E + E)$

22

/** Unprocessed input starts an E. Recognize that E, throwing away each piece from the input as it is recognized. Return false if error is detected and true if no errors. Upon return, processed tokens have been removed from input. */

public boolean parseE()

before call: already processed unprocessed
 (2 + (4 + 8) + 9)

after call:
(call returns true) already processed unprocessed
 (2 + (4 + 8) + 9)

Specification: **/** Unprocessed input starts an E. ...*/**

23

$E \rightarrow \text{integer}$


$E \rightarrow (E + E)$

```
public boolean parseE() {  
    if (first token is an integer) remove it from input and return true;  
    if (first token is not '(') return false else remove it from input;  
    if (!parseE()) return false;  
    if (first token is not '+') return false else remove it from input;  
    if (!parseE()) return false;  
    if (first token is not ')') return false else remove it from input;  
    return true;  
}
```

Illustration of parsing to check syntax

24

$E \rightarrow \text{integer}$
 $E \rightarrow (E + E)$

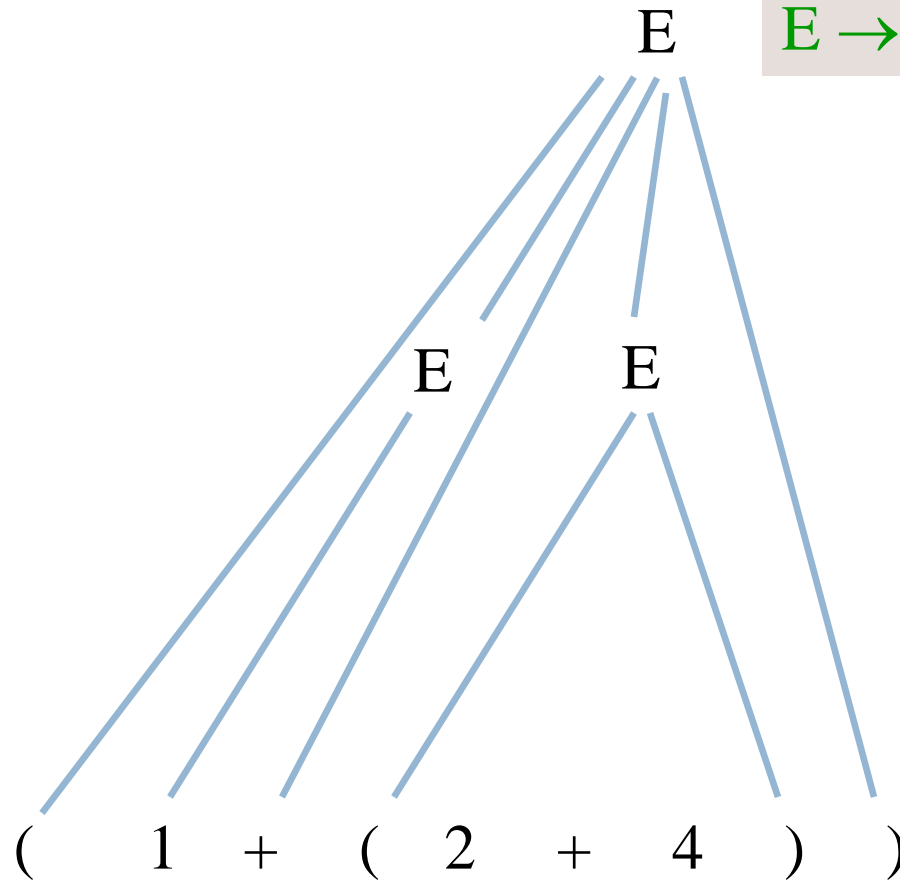

The scanner constructs tokens

25

An object **scanner** of class **Scanner** is in charge of the input String. It constructs the tokens from the String as necessary.

e.g. from the string “1 464+634” build the token “1 464”, the token “+”, and the token “634”.

It is ready to work with the part of the input string that has not yet been processed and has thrown away the part that is already processed, in left-to-right fashion.

already processed unprocessed

(2 + (4 + 8) + 9)

Change parser to generate a tree

26

$E \rightarrow \text{integer}$

$E \rightarrow (E + E)$

```
/** ... Return a Tree for the E if no error.
```

```
Return null if there was an error*/
```

```
public Tree parseE() {
```

```
if (first token is an integer) remove it from input and return true;
```

```
if (first token is an integer) {
```

```
Tree t= new Tree(the integer);
```

```
Remove token from input;
```

```
return t;
```

```
}
```

```
...
```

```
}
```

Change parser to generate a tree

27

```
/** ... Return a Tree for the E if no error.
```

```
Return null if there was an error*/
```

```
public Tree parseE() {
```

```
    if (first token is an integer) ... ;
```

```
    if (first token is not '(' ) return null else remove it from input;
```

```
    Tree t1= parse(E); if (t1 == null) return null;
```

```
    if (first token is not '+' ) return null else remove it from input;
```

```
    Tree t2= parse(E); if (t2 == null) return null;
```

```
    if (first token is not ') ' ) return false else remove it from input;
```

```
    return new Tree(t1, '+', t2);
```

```
}
```

$E \rightarrow \text{integer}$

$E \rightarrow (E + E)$

Code for a stack machine

28

Code for $2 + (3 + 4)$

PUSH 2

PUSH 3

PUSH 4

ADD

ADD

4

3

2

Stack

ADD: remove two top values
from stack, add them, and
place result on stack

It's postfix notation! **2 3 4 + +**

Code for a stack machine

29

Code for $2 + (3 + 4)$

PUSH 2

PUSH 3

PUSH 4

ADD

ADD

ADD: remove two top values
from stack, add them, and
place result on stack

7

2

Stack

It's postfix notation! **2 3 4 + +**

Use parser to generate code for a stack machine

30

Code for $2 + (3 + 4)$

PUSH 2

PUSH 3

PUSH 4

ADD

ADD

ADD: remove two top values from stack, add them, and place result on stack

It's postfix notation! **2 3 4 + +**

parseE can generate code as follows:

- For integer i , return string "PUSH " + i + "\n"
- For $(E1 + E2)$, return a string containing
 - ◆ Code for $E1$
 - ◆ Code for $E2$
 - ◆ "ADD\n"

Grammar that gives precedence to * over +

31

$E \rightarrow T \{ + T \}$

$T \rightarrow F \{ * F \}$


$F \rightarrow \text{integer}$

$F \rightarrow (E)$


Notation: $\{ xxx \}$ means
0 or more occurrences of xxx.

E: Expression **T:** Term

F: Factor

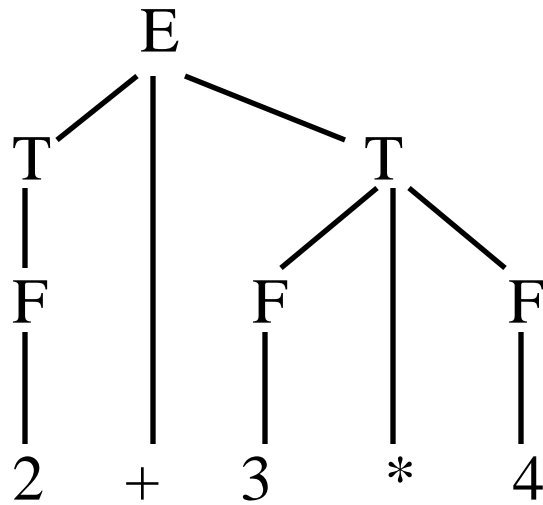

says do * first

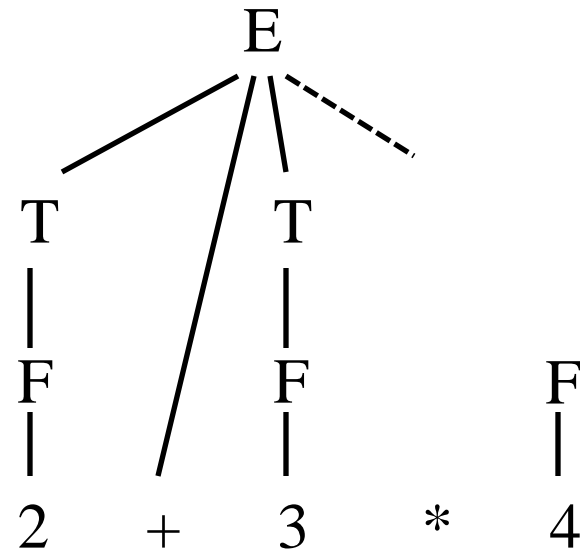

Try to do + first, can't complete tree

Does recursive descent always work?

32

Some grammars cannot be used for recursive descent

Trivial example (causes infinite recursion):

$$S \rightarrow b$$
$$S \rightarrow Sa$$

Can rewrite grammar

$$S \rightarrow b$$
$$S \rightarrow bA$$
$$A \rightarrow a$$
$$A \rightarrow aA$$

For some constructs, recursive descent is hard to use

Other parsing techniques exist – take the compiler writing course