

CS/ENGRD 2110

SPRING 2018

Lecture 2: Objects and classes in Java
<http://courses.cs.cornell.edu/cs2110>

Homework HW1

2

The answers you handed in at the end of lecture 1 showed mass confusion! Perhaps 80% of you weren't sure what to write. **This was not graded! It was only to help us and you assess the situation.**

Doing HW1 will eliminate the confusion. Piazza note @30, (it is linked to in the pinned Piazza Recitation/Homework note.)

Evaluation, Execution, Syntax, Semantics.

Presenting an algorithm in English (2.5 minutes).

Executing the assignment statement (2.5 minutes).

Do HW1 and submit on the CMS

CMS VideoNote.com, PPT slides, JavaHyperText.

3

CMS. Visit course webpage, click “Links”, then “CMS for 2110”.

Videos of lectures from last semester: Look at

<http://cornell.videonote.com/channels/1027/videos>

Download ppt slides the evening before each lecture, have them available in class. Please don't ask questions on the piazza about that material the day before the lecture!

Got a Java question? See first if it's answered on JavaHyperText

Java OO (Object Orientation)

4

Python and Matlab have objects and classes.

Strong-typing nature of Java changes how OO is done and how useful it is. Put aside your previous experience with OO (if any).

This lecture:

First: describe **objects**, demoing their creation and use.

Second: Show you a **class definition**, a **blueprint for objects**, and how it contains definitions of methods (functions and procedures) that appear in each object of the class.

Third: Talk about keyword **null**.

Fourth: Introduce Exceptions

Homework

5

1. Study material of this lecture.
2. Visit JavaHyperText, click on **Code Style**. Study
 3. **Documentation**
 - 3.1 **Kinds of comments**
 - 3.2 **Don't over-comment**
 - 3.4 **Method specifications**
 - 3.4.1 **Precondition and postcondition**
3. Spend a few minutes perusing slides for lecture 3; bring them to lecture 3.

Java OO

6

References to `JavaHyperText` entries

Objects: `object`

Calling methods: `method call`

Class definition: `class`

public, private: `public private`

`method`

Parameter vs argument:

parameter, argument

Inside-out rule

Methods may have `parameters`

Method calls may have `arguments`

Fields of an object may be mentioned. We cover these in next lecture

Function: `a method that returns a result.`

Procedure: `method that does not return a result, void method.`

Drawing an object of class javax.swing.JFrame

7

Object is associated with a window on your computer monitor

Name of object, giving **class name** and its **memory location** (hexadecimal).
Java creates name when it creates object

JFrame@25c7

hide() show()
setTitle(String) getTitle()
getX() getY() setLocation(int, int)
getWidth() getHeight() setSize(int,int)
...

JFrame

Object contains methods (functions and procedures), which can be called to operate on the object

Function: returns a value; call on it is an expression

Procedure: does not return a value; call on it is a statement

Evaluation of new-expression creates an object

8

Evaluation of `JFrame@25c7`

`new javax.swing.JFrame()`

creates an object and gives as its value the name of the object

If evaluation creates this object, value of expression is

`JFrame@25c7`

9

`2 + 3 + 4`

`JFrame@25c7`

`hide() show()`

`setTitle(String) getTitle()`

`getX() getY() setLocation(int, int)`

`getWidth() getHeight() setSize(int,int)`

...

JFrame

A class variable contains the name of an object

9

Type JFrame: Names of objects of class JFrame

```
javax.swing.JFrame h;  
h= new javax.swing.JFrame();
```

If evaluation of new-exp creates the object shown, name of object is stored in h

Consequence: a class variable contains not an object but name of an object, pointer to it. Objects are referenced indirectly.

h JFrame@25c7
JFrame

JFrame@25c7

hide() show()
setTitle(String) getTitle()
getX() getY() setLocation(int, int)
getWidth() getHeight() setSize(int,int)
...

JFrame

A class variable contains the name of an object

10

If variable `h` contains the name of an object, you can call methods of the object using dot-notation:

Procedure calls: `h.show();` `h.setTitle("this is a title");`

Function calls: `h.getX()` `h.getX() + h.getWidth()`

```
x= y;  
g= h;  
h 

|             |  |
|-------------|--|
| JFrame@25c7 |  |
|-------------|--|

  
JFrame
```

JFrame@25c7

JFrame

```
hide() show()  
setTitle(String) getTitle()  
getX() getY() setLocation(int, int)  
getWidth() getHeight() setSize(int,int)  
...
```

Class definition: a blueprint for objects of the class

11

Class definition: Describes format of an object (instance) of the class.

```
/** description of what the class is for */
```

This is a comment

```
public class C {
```

Access modifier

```
    declarations of methods (in any order)
```

public means C can be used anywhere

```
}
```

Class definition C goes in its own file named

C.java

On your hard drive, have separate directory for each Java project you write; put all class definitions for program in that directory. You'll see this when we demo.

First class definition

12


```
/** An instance (object of the class) has (almost) no methods */  
public class C {  
  
}
```

Then, execution of

```
C k;  
k = new C();
```

creates object shown to right
and stores its name in k

k C@25c7 C

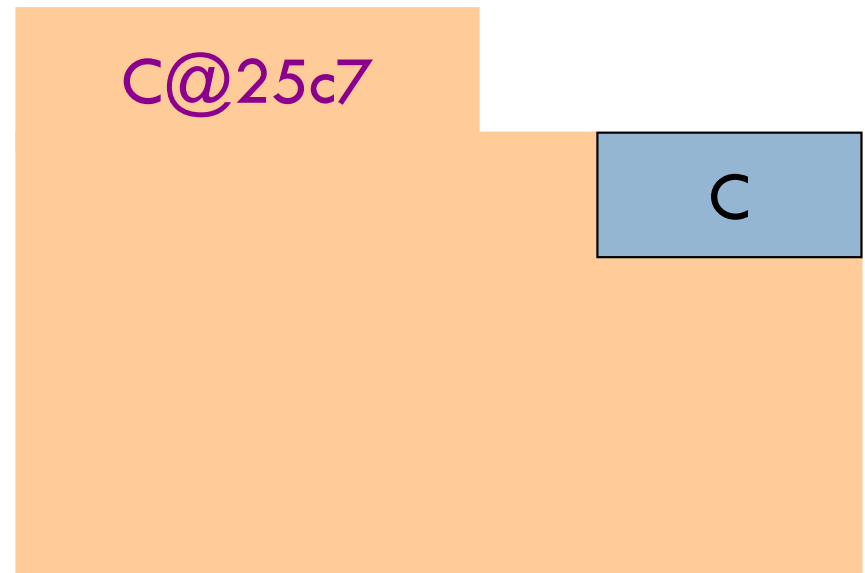

Class extends (is a subclass of) JFrame

13


```
/** An instance is a subclass of JFrame */  
public class C extends javax.swing.JFrame {  
  
}
```

C: **subclass** of JFrame

JFrame: **superclass** of C

C **inherits** all methods
that are in a JFrame

Object has 2 partitions:
one for JFrame methods,
one for C methods

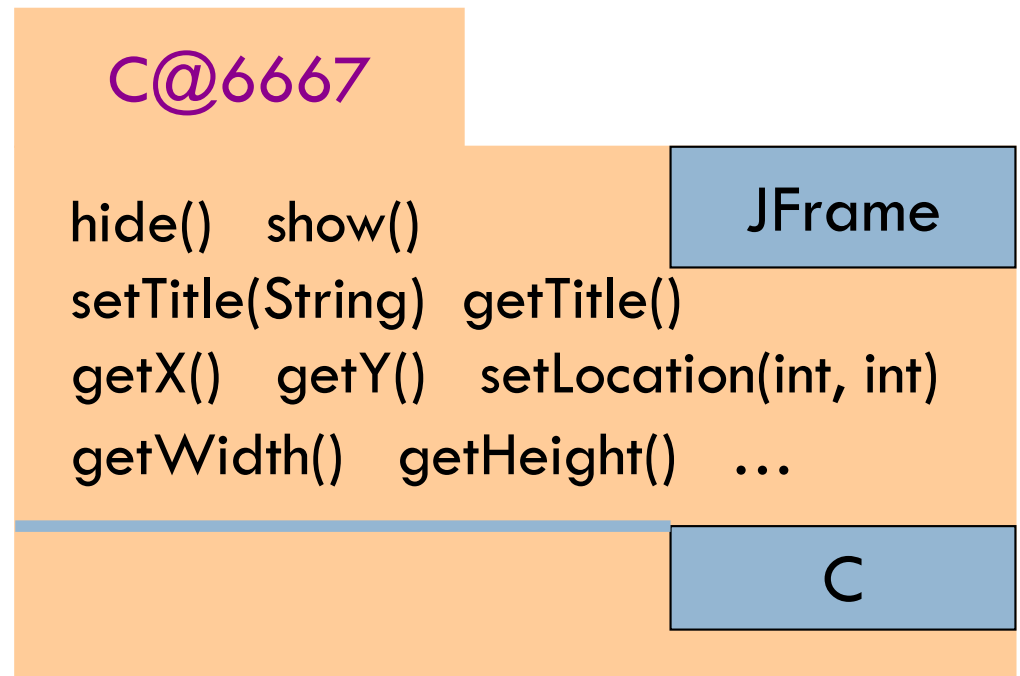

Easy re-use of program part!

Class definition with a function definition

14

```
/** An instance is a subclass of JFrame with a function area */
```

```
public class C extends javax.swing.JFrame {
```

```
/** Return area of window */
```

```
public int area() {
```

```
    return getWidth() * getHeight();
```

```
}
```

```
}
```

Spec, as a comment

Function calls automatically call functions that are in the object

You know it is a function because it has a return type

C@6667

...

getWidth() getHeight()

area()

JFrame

C

Inside-out rule for finding declaration

15

```
/** An instance ... */
```

```
public class C extends javax.swing.JFrame {  
    /** Return area of window */  
    public int area() {  
        return getWidth() * getHeight();  
    }  
}
```

The whole
method is in
the object

To what declaration does a
name refer? **Use inside-out**

rule:

Look first in method body, starting
from name and moving out; then
look at parameters; then look
outside method in the object.

C@6667

getWidth()
getHeight() ...

JFrame

area() {
 return getWidth() * getHeight();
}

C

Inside-out rule for finding declaration

16

```
/** An instance ... */
```

```
public class C extends ...JFrame {  
    /** Return area of window */  
    public int area() {  
        return getWidth() * getHeight();  
    }  
}
```

Function **area**: in each object.
getWidth() calls function
getWidth in the object in
which it appears.

C@2abc

getWidth()
getHeight() ...

JFrame

area() {
 return getWidth() * getHeight();
}

C

C@6667

getWidth()
getHeight() ...

JFrame

area() {
 return getWidth() * getHeight();
}

C

Class definition with a procedure definition

17

```
/** An instance is a JFrame with more methods */  
public class C extends javax.swing.JFrame {  
  public int area() {  
    return getWidth() * getHeight();  
  }  
}
```

```
/** Set width of window to its height */  
public void setWtoH() {  
  setSize(getHeight(), getHeight());  
}
```

} Call on
procedure
setSize

It is a procedure
because it has **void**
instead of return type

C@6667

...

setSize(int, int)

getWidth() getHeight()

area()

setWtoH()

JFrame

C


Using an object of class Date

18

```
/** An instance is a JFrame with more methods */  
public class C extends javax.swing.JFrame {  
    ...  
    /** Put the date and time in the title */  
    public void setTitleToDate() {  
        setTitle((new java.util.Date()).toString());  
    }  
}
```


An object of class `java.util.Date` contains the date and time at which it was created.

It has a function `toString()`, which yields the data as a `String`.

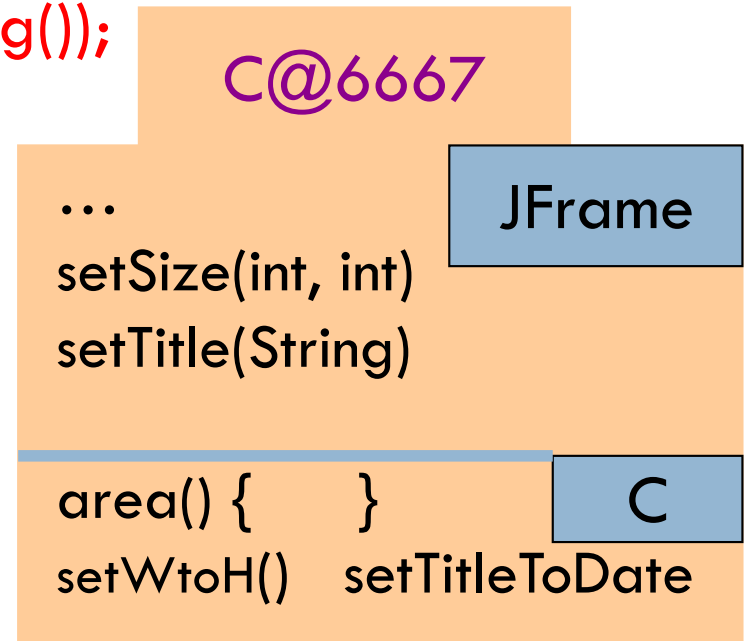

About null

19

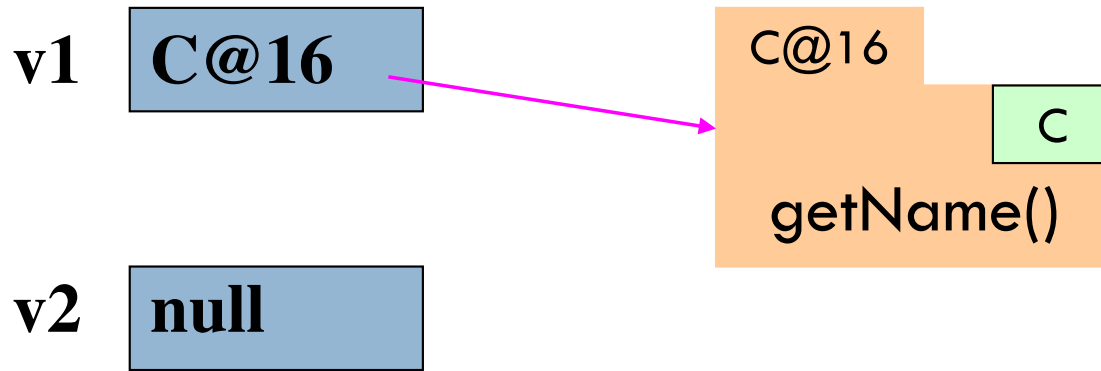

null denotes the absence of a name.

v2.getName() is a mistake! Program stops with a **NullPointerException**

You can write assignments like: **v1 = null;**

and expressions like: **v1 == null**

Intro to Exceptions

20

```
int x= 5;  
System.out.println("x is now "+x);  
assert x== 6;
```

When the assert statement is executed and x is not 6, an object of class `AssertionError` is created and “thrown”. It contains info needed to print out a nice message.

```
java.lang.AssertionError  
at A0.main(A0.java:9)
```

`AssertionError@2`

Throwable

Error

AssertionError

Intro to Exceptions

21

```
m();
```

```
public static void m() {  
    int y= 5/0;  
}
```

When `5/0` is evaluated, an object of class `ArithmeticException` is created and “thrown”. It contains info needed to print out a nice message.

`ArithmeticException@4`

Throwable

Exception

RuntimeException

ArithmeticException

Exception in thread "main"

java.lang.ArithmeticException: / by zero

at A0.m(A0.java:15) ← **where it occurred**

at A0.main(A0.java:6) ← **where m was called**

Intro to Exceptions

22

You will learn all about exceptions in next week's recitation!

Throwable

Error

IOException

AssertionException

...

Exception

RuntimeException

ArithmeticException

NullPointerException

IllegalArgumentException

...