

Lecture 16

More Recursion

Announcements for This Lecture

Prelim 1

- Prelim 1 back **today!**
 - Pick up in Gates 216
 - Solution posted in CMS
 - **Mean:** 73, **Median:** 76
 - Twinsies was the issue
- What are letter grades?
 - **A:** 85+ (consultant level)
 - **B:** 60-79 (major level)
 - **C:** 35-55 (should be S/U)

Assignments and Labs


- Need to be working on A4
 - Instructions are posted
 - Just reading it takes a while
 - Slightly longer than A3
 - Problems are harder
- **Lab Today:** lots of practice!
 - First 4 functions mandatory
 - Many optional ones in PDF
 - Exam questions on Prelim 2

Recall: Divide and Conquer

Goal: Solve problem P on a piece of data



Idea: Split data into two parts and solve problem

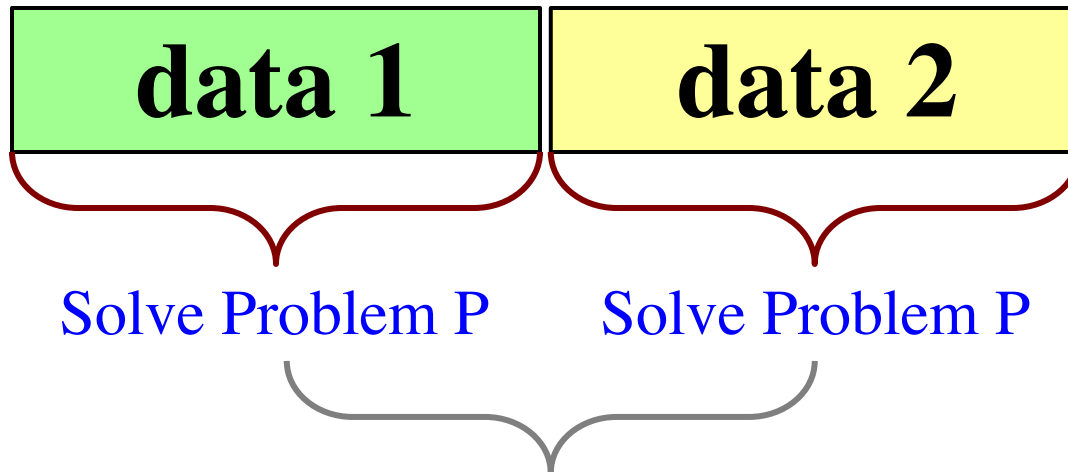

Combine Answer!

Example: Reversing a String

```
def reverse(s):
```

```
    """Returns: reverse of s
```

```
    Precondition: s a string"""
```

```
    # 1. Handle small data
```


```
    if len(s) <= 1:
```

```
        return s
```

```
    # 2. Break into two parts
```

```
    # 3. Combine the result
```


H	e	l	l	o	!
---	---	---	---	---	---



!	o	l	l	e	H
---	---	---	---	---	---



H	e	l	l	o	!
---	---	---	---	---	---



!	o	l	l	e	H
---	---	---	---	---	---

Example: Reversing a String

```
def reverse(s):
```

```
    """Returns: reverse of s
```

```
    Precondition: s a string"""
```

```
    # 1. Handle small data
```

```
    if len(s) <= 1:
```

```
        return s
```


```
    # 2. Break into two parts
```

```
    left = s[0]
```

```
    right = reverse(s[1:])
```

```
    # 3. Combine the result
```


H	e	l	l	o	!
---	---	---	---	---	---



!	o	l	l	e	H
---	---	---	---	---	---



H	e	l	l	o	!
---	---	---	---	---	---



!	o	l	l	e	H
---	---	---	---	---	---

Example: Reversing a String

```
def reverse(s):
```

```
    """Returns: reverse of s
```

```
    Precondition: s a string"""
```

```
    # 1. Handle small data
```

```
    if len(s) <= 1:
```

```
        return s
```

```
    # 2. Break into two parts
```


```
    left = s[0]
```

```
    right = reverse(s[1:])
```

```
    # 3. Combine the result
```

```
    return right+left
```


H	e	l	l	o	!
---	---	---	---	---	---



!	o	l	l	e	H
---	---	---	---	---	---



H	e	l	l	o	!
---	---	---	---	---	---



!	o	l	l	e	H
---	---	---	---	---	---

Example: Reversing a String

```
def reverse(s):
```

```
    """Returns: reverse of s
```

```
    Precondition: s a string"""
```

```
    # 1. Handle small data
```

```
    if len(s) <= 1:
```

```
        return s
```

```
    # 2. Break into two parts
```

```
    left = s[0]
```

```
    right = reverse(s[1:])
```

```
    # 3. Combine the result
```

```
    return right+left
```



Base Case

Recursive
Case

Example: Reversing a String

```
def reverse(s):
```

```
    """Returns: reverse of s
```

```
    Precondition: s a string"""
```

```
    # 1. Handle small data
```

```
    if len(s) <= 1:
```

```
        return s
```

```
    # 2. Break
```

```
    left = s[0]
```

```
    right = reverse(s[1:])
```

```
    # 3. Combine the result
```

```
    return right+left
```

Remove
recursive call

Base Case

Recursive
Case

How to Break Up a Recursive Function?

```
def commafy(s):
```

```
    """Returns: string with commas every 3 digits
```

```
    e.g. commafy('5341267') = '5,341,267'
```

```
    Precondition: s represents a non-negative int"""
```

Approach 1

5

341267

How to Break Up a Recursive Function?


```
def commafy(s):
```

```
    """Returns: string with commas every 3 digits
```

```
    e.g. commafy('5341267') = '5,341,267'
```

```
    Precondition: s represents a non-negative int"""
```

Approach 1

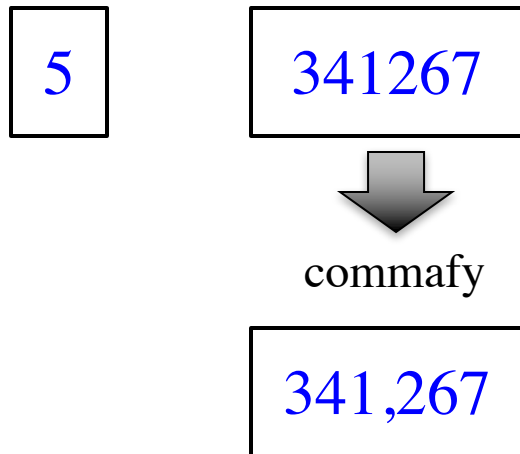

How to Break Up a Recursive Function?


```
def commafy(s):
```

```
    """Returns: string with commas every 3 digits
```

```
    e.g. commafy('5341267') = '5,341,267'
```

```
    Precondition: s represents a non-negative int"""
```

Approach 1

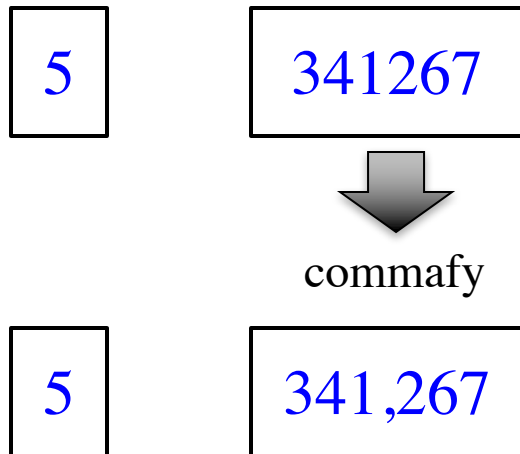

How to Break Up a Recursive Function?


```
def commafy(s):
```

```
    """Returns: string with commas every 3 digits
```

```
    e.g. commafy('5341267') = '5,341,267'
```

```
    Precondition: s represents a non-negative int"""
```

Approach 1

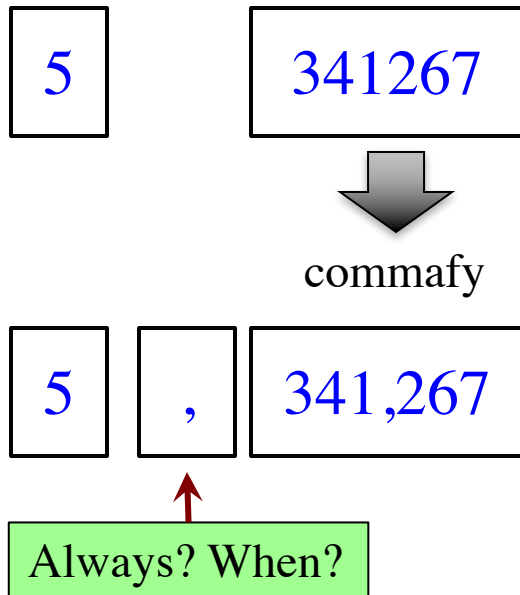

How to Break Up a Recursive Function?


```
def commafy(s):
```

```
    """Returns: string with commas every 3 digits
```


```
    e.g. commafy('5341267') = '5,341,267'
```

```
    Precondition: s represents a non-negative int"""
```

Approach 1

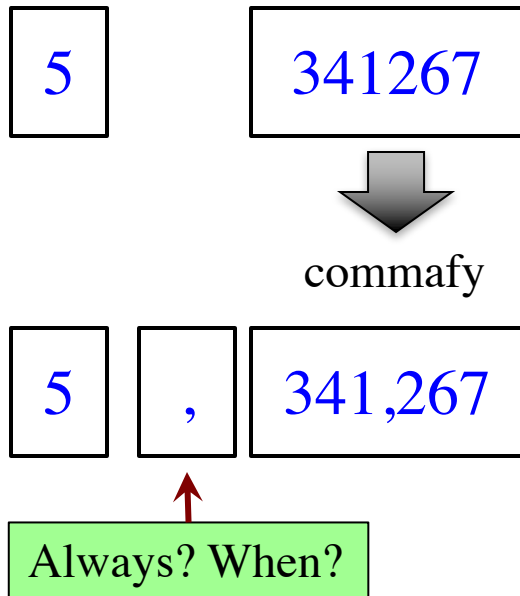

Approach 2



How to Break Up a Recursive Function?


```
def commafy(s):
```

"""Returns: string with commas every 3 digits


e.g. commafy('5341267') = '5,341,267'

Precondition: s represents a non-negative int"""

Approach 1

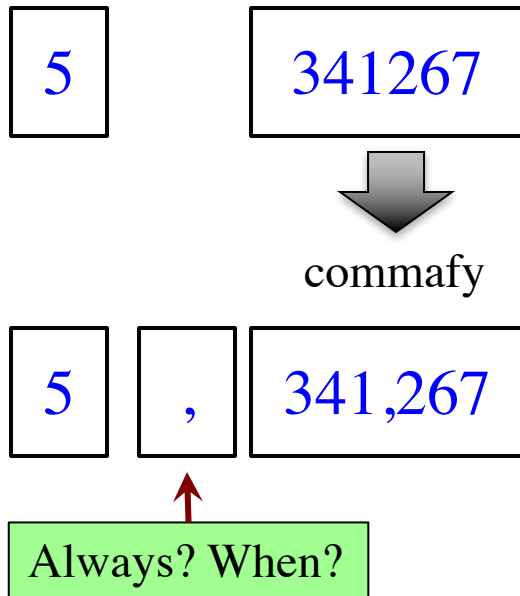

Approach 2

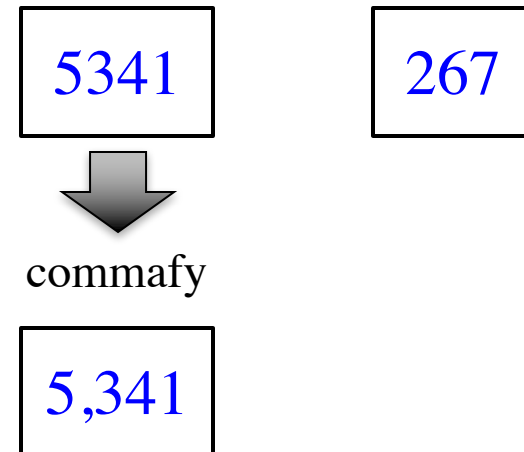

How to Break Up a Recursive Function?


```
def commafy(s):
```

"""Returns: string with commas every 3 digits


e.g. commafy('5341267') = '5,341,267'

Precondition: s represents a non-negative int"""

Approach 1

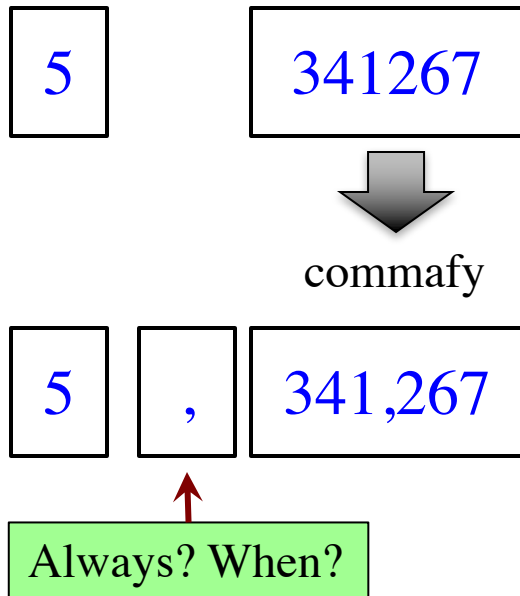

Approach 2

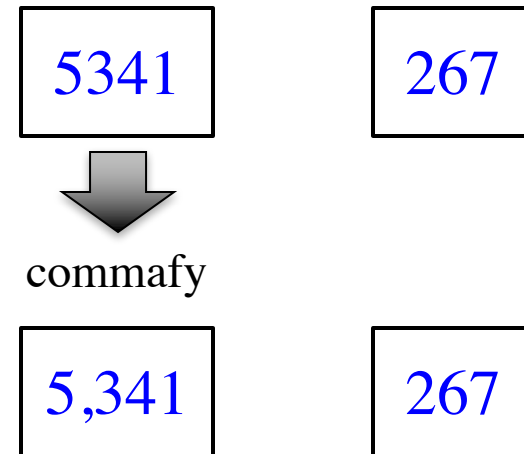

How to Break Up a Recursive Function?


```
def commafy(s):
```

"""Returns: string with commas every 3 digits

e.g. commafy('5341267') = '5,341,267'

Precondition: s represents a non-negative int"""


Approach 1

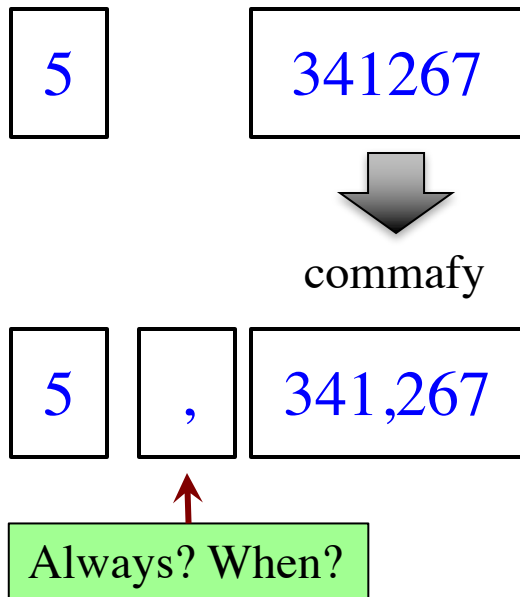

10/17/17

More Recursion

Approach 2

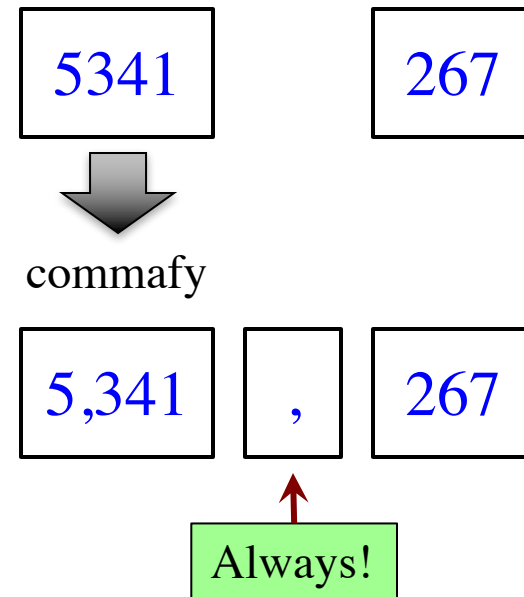

16

How to Break Up a Recursive Function?

```
def commafy(s):
```

```
    """Returns: string with commas every 3 digits
```

```
    e.g. commafy('5341267') = '5,341,267'
```

```
    Precondition: s represents a non-negative int"""
```

```
    # 1. Handle small data.
```

```
    if len(s) <= 3:
```

```
        | return s
```

```
    # 2. Break into two parts
```

```
    left = commafy(s[:-3])
```

```
    right = s[-3:] # Small part on RIGHT
```

```
    # 3. Combine the result
```

```
    return left + ',' + right
```



Base Case

Recursive
Case


How to Break Up a Recursive Function?

```
def exp(b, c)
```

```
    """Returns: bc
```

```
    Precondition: b a float, c ≥ 0 an int"""
```


Approach 1

$$12^{256} = 12 \times (12^{255})$$


Recursive

$$b^c = b \times (b^{c-1})$$

Approach 2
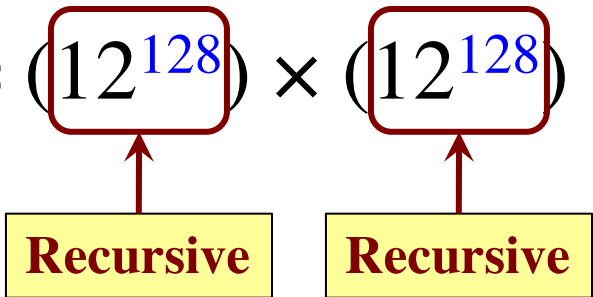
$$12^{256} = (12^{128}) \times (12^{128})$$


Recursive **Recursive**

$$b^c = (b \times b)^{c/2} \text{ if } c \text{ even}$$

Raising a Number to an Exponent

Approach 1

```
def exp(b, c)
    """Returns: bc
    Precond: b a float, c ≥ 0 an int"""
    # b0 is 1
    if c == 0:
        | return 1

    # bc = b(bc-1)
    left = b
    right = exp(b, c-1)

    return left*right
```

Approach 2

```
def exp(b, c)
    """Returns: bc
    Precond: b a float, c ≥ 0 an int"""
    # b0 is 1
    if c == 0:
        | return 1

    # c > 0
    if c % 2 == 0:
        | return exp(b*b, c//2)

    return b*exp(b*b, (c-1)//2)
```

Raising a Number to an Exponent

Approach 1

```
def exp(b, c)
    """Returns: bc
    Precond: b a float, c ≥ 0 an int"""
    # b0 is 1
    if c == 0:
        return 1

    # bc = b(bc-1)
    left = b
    right = exp(b, c-1)

    return left*right
```

Approach 2

```
def exp(b, c)
    """Returns: bc
    Precond: b a float, c ≥ 0 an int"""
    # b0 is 1
    if c == 0:
        return 1

    # c > 0
    if c % 2 == 0:
        return exp(b*b, c//2)
    else:
        return b*exp(b*b, (c-1)//2)
```

Raising a Number to an Exponent

```
def exp(b, c)
    """Returns: bc
    Precond: b a float, c ≥ 0 an int"""
    # b0 is 1
    if c == 0:
        return 1


    # c > 0
    if c % 2 == 0:
        return exp(b*b, c//2)
    return b*exp(b*b, (c-1)//2)
```

c	# of calls
0	0
1	1
2	2
4	3
8	4
16	5
32	6
2 ⁿ	n + 1

32768 is 2¹⁵
b³²⁷⁶⁸ needs only 215 calls!

Recursion and Objects

- Class Person (person.py)
 - Objects have 3 attributes
 - **name**: String
 - **mom**: Person (or None)
 - **dad**: Person (or None)
- Represents the “family tree”
 - Goes as far back as known
 - Attributes mom and dad are None if not known
- **Constructor**: Person(n,m,d)
 - Or Person(n) if no mom, dad

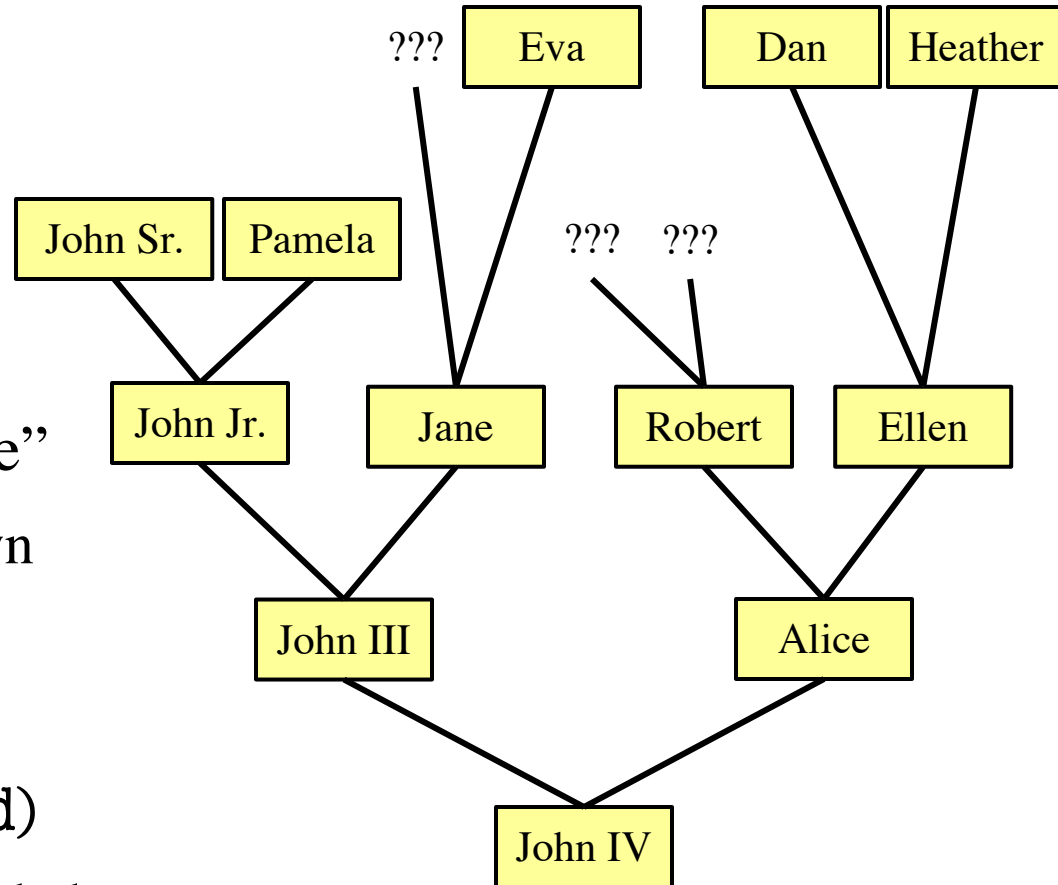

Recursion and Objects

```
def num_ancestors(p):
```

```
    """Returns: num of known ancestors
```

```
    Pre: p is a Person"""
```

```
    # 1. Handle small data.
```

```
    # No mom or dad (no ancestors)
```


```
    # 2. Break into two parts
```

```
    # Has mom or dad
```

```
    # Count ancestors of each one
```


```
    # (plus mom, dad themselves)
```

```
    # 3. Combine the result
```

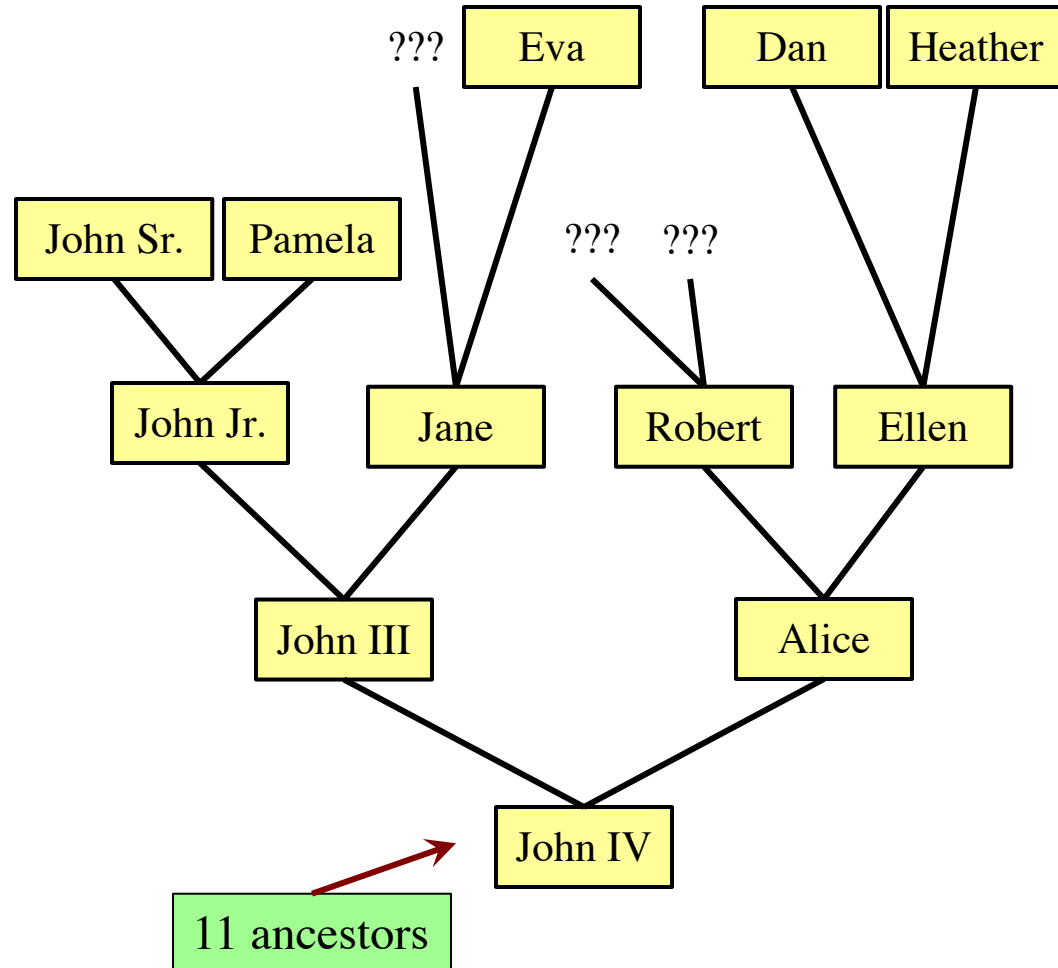

Recursion and Objects

```
def num_ancestors(p):  
    """Returns: num of known ancestors  
    Pre: p is a Person"""  
    # 1. Handle small data.  
    if p.mom == None and p.dad == None:  
        | return 0  
  
    # 2. Break into two parts  
    moms = 0  
    if not p.mom == None:  
        | moms = 1+num_ancestors(p.mom)  
    dads = 0  
    if not p.dad == None:  
        | dads = 1+num_ancestors(p.dad)  
  
    # 3. Combine the result  
    return moms+dads
```

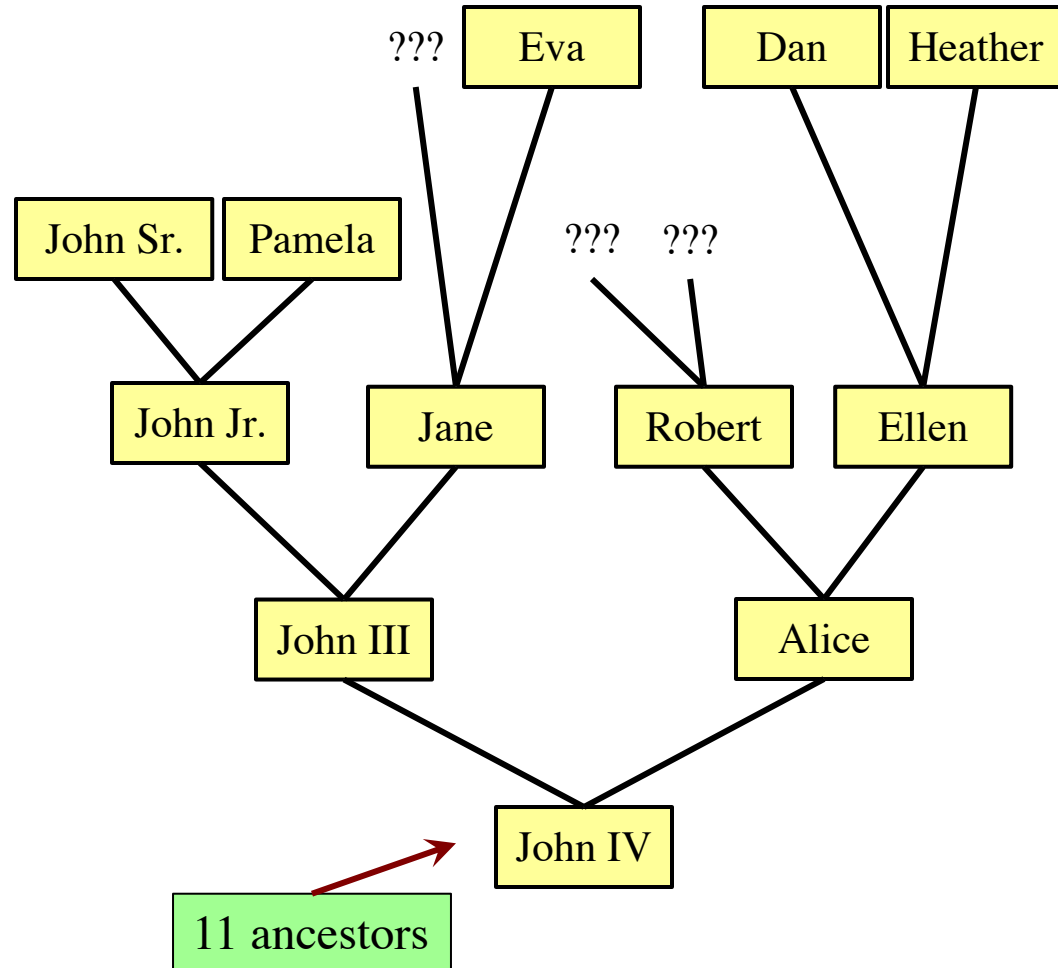

Is All Recursion Divide and Conquer?

- Divide and conquer implies two halves “equal”
 - Performing the same check on each half
 - With some optimization for small halves
- Sometimes we are given a **recursive definition**
 - Math formula to compute that is recursive
 - String definition to check that is recursive
 - Picture to draw that is recursive
 - **Example:** $n! = n (n-1)!$
- In that case, we are just implementing definition

Example: Palindromes


- String with ≥ 2 characters is a palindrome if:
 - its first and last characters are equal, and
 - the rest of the characters form a palindrome

- **Example:**

have to be the same

AMANAPLANACANALPANAMA

has to be a palindrome

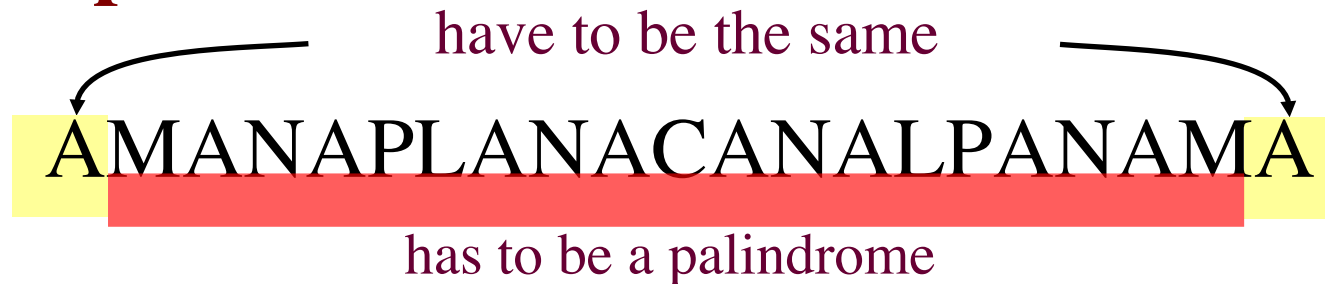

- **Function to Implement:**

```
def ispalindrome(s):
```

```
    """Returns: True if s is a palindrome"""
```

Example: Palindromes

- String with ≥ 2 characters is a palindrome if:
 - its first and last characters are equal, and
 - the rest of the characters form a palindrome

```
def ispalindrome(s):
```

```
    """Returns: True if s is a palindrome"""
```

```
    if len(s) < 2:
```

```
        return True
```

Base case

```
    # Halves not the same; not divide and conquer
```

```
    ends = s[0] == s[-1]
```

```
    middle = ispalindrome(s[1:-1])
```

```
    return ends and middle
```

Recursive
Definition

Recursive case

Recursive Functions and Helpers

```
def ispalindrome2(s):  
    """Returns: True if s is a palindrome  
    Case of characters is ignored."""  
    if len(s) < 2:  
        | return True  
    # Halves not the same; not divide and conquer  
    ends = equals_ignore_case(s[0], s[-1])  
    middle = ispalindrome(s[1:-1])  
    return ends and middle
```

Recursive Functions and Helpers

```
def ispalindrome2(s):  
    """Returns: True if s is a palindrome  
    Case of characters is ignored."""  
    if len(s) < 2:  
        | return True  
    # Halves not the same; not divide and conquer  
    ends = equals_ignore_case(s[0], s[-1])  
    middle = ispalindrome(s[1:-1])  
    return ends and middle
```

Recursive Functions and Helpers

```
def ispalindrome2(s):  
    """Returns: True if s is a palindrome  
    Case of characters is ignored."""  
    if len(s) < 2:  
        return True  
    # Halves not the same; not divide and conquer  
    ends = equals_ignore_case(s[0], s[-1])  
    middle = ispalindrome(s[1:-1])  
    return ends and middle
```

Use helper functions!

- Pull out anything not part of the recursion
- Keeps your code simple and easy to follow

```
def equals_ignore_case(a, b):  
    """Returns: True if a and b are same ignoring case"""  
    return a.upper() == b.upper()
```

Example: More Palindromes

```
def ispalindrome3(s):  
    """Returns: True if s is a palindrome  
    Case of characters and non-letters ignored."""  
    return ispalindrome2(depunct(s))
```


```
def depunct(s):  
    """Returns: s with non-letters removed"""  
    if s == "":  
        return s  
    # Combine left and right  
    if s[0] in string.letters:  
        return s[0]+depunct(s[1:])  
    # Ignore left if it is not a letter  
    return depunct(s[1:])
```

Use helper functions!

- Sometimes the helper is a recursive function
- Allows you break up problem in smaller parts


Example: Space Filling Curves

Challenge

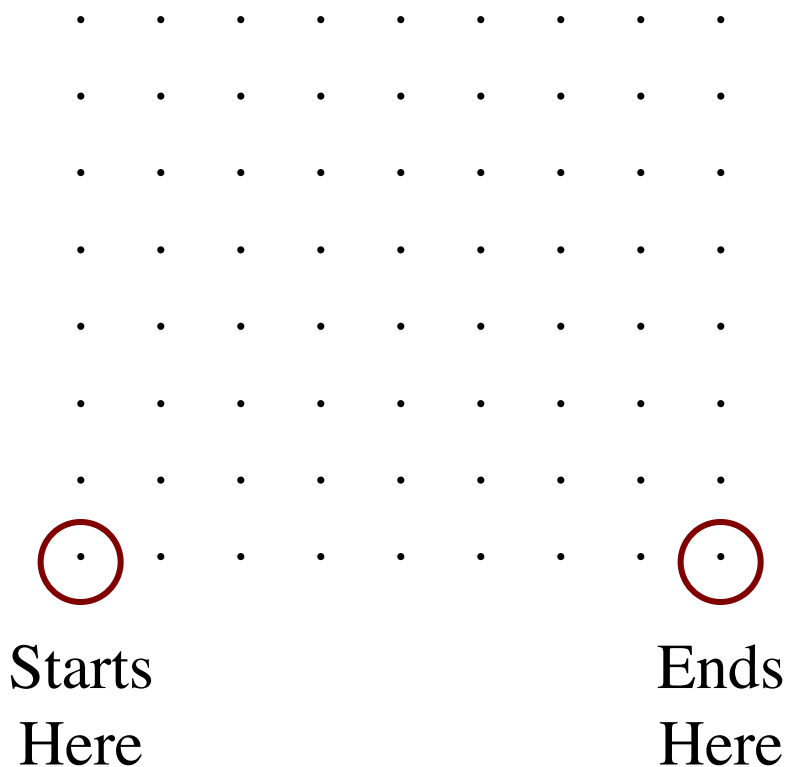


- Draw a curve that
 - Starts in the left corner
 - Ends in the right corner
 - Touches every grid point
 - Does not touch or cross itself anywhere
- Useful for analysis of 2-dimensional data


Hilbert's Space Filling Curve

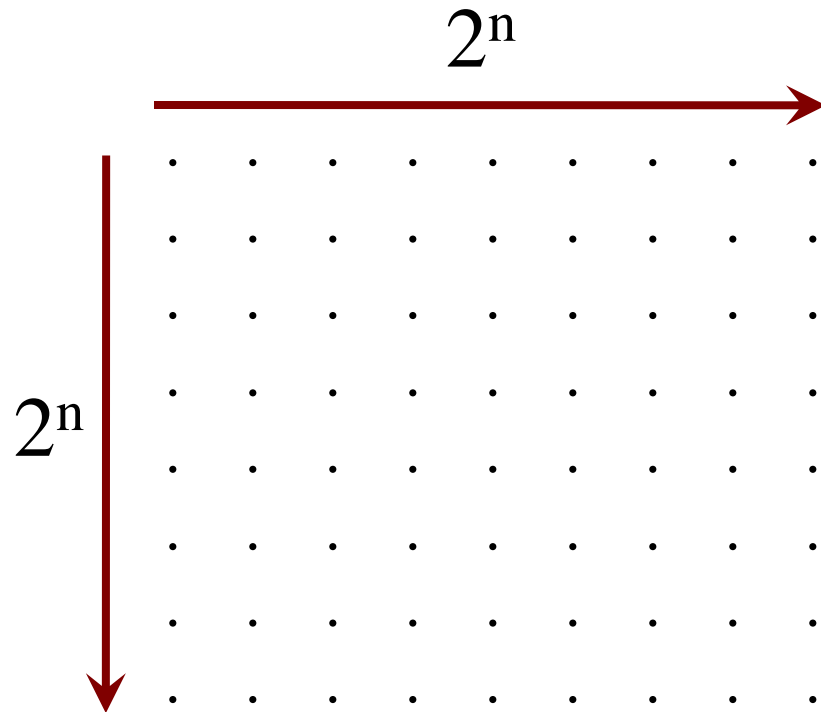


Hilbert(1):



Hilbert(2):




Hilbert(n):

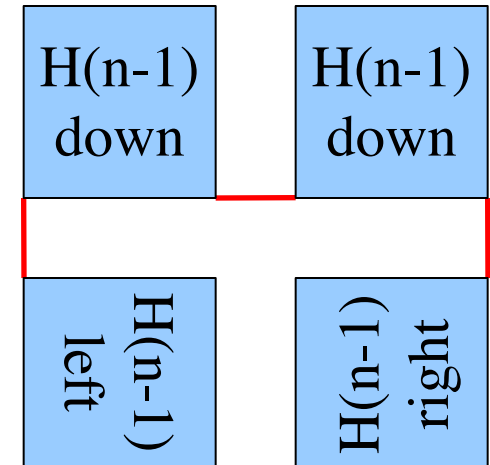

Hilbert's Space Filling Curve


Basic Idea

- Given a box
- Draw $2^n \times 2^n$ grid in box
- Trace the curve
- As n goes to ∞ , curve fills box

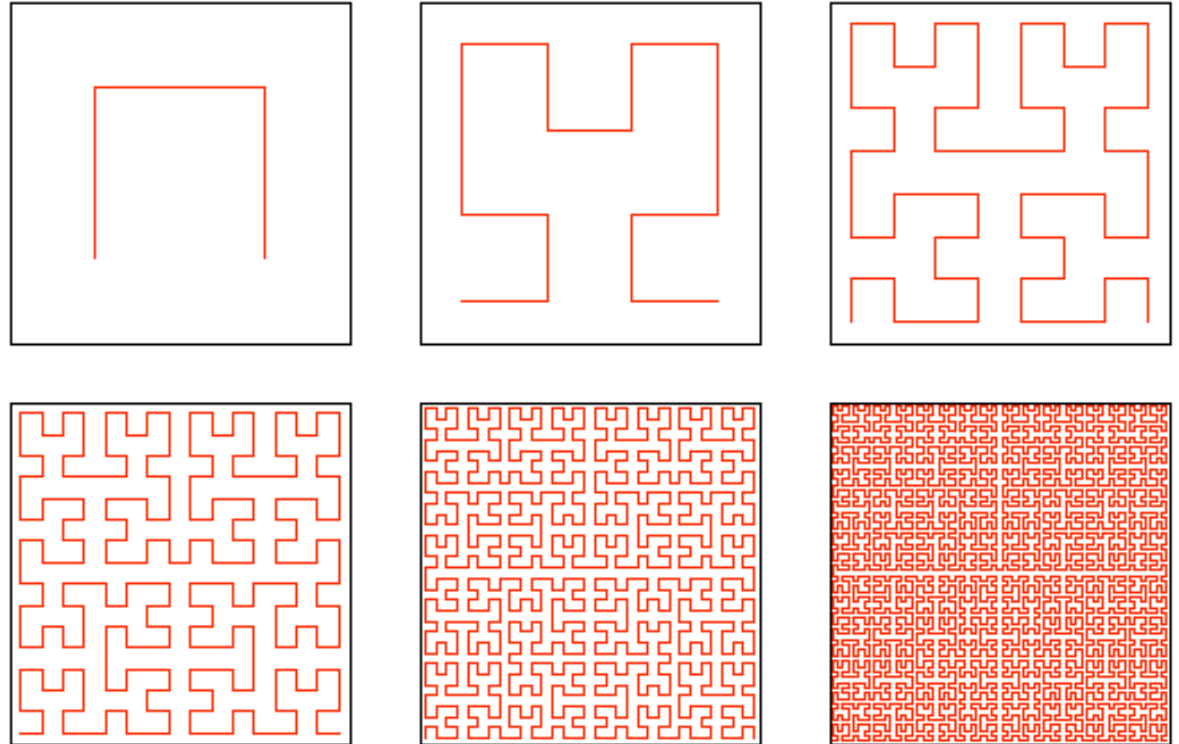


“Turtle” Graphics: Assignment A4


Turn



Draw Line

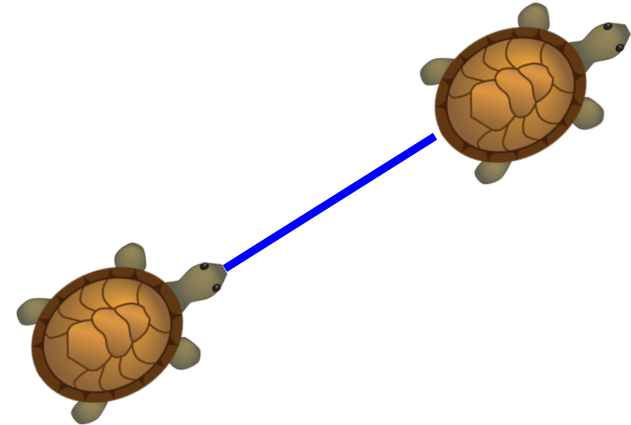

Move

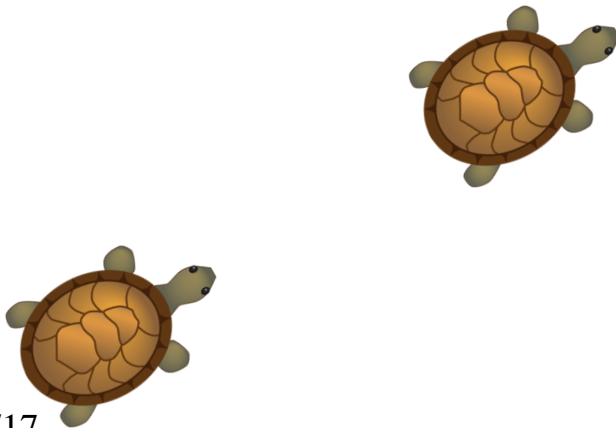

Change Color

