

### A Mathematical Example: Factorial

- Non-recursive definition:

$$n! = n \times n-1 \times \dots \times 2 \times 1$$

$$= n (n-1 \times \dots \times 2 \times 1)$$

- Recursive definition:

$$n! = n (n-1)! \quad \text{for } n \geq 0 \quad \text{Recursive case}$$

$$0! = 1 \quad \text{Base case}$$

What happens if there is no base case?

### Factorial as a Recursive Function

```
def factorial(n):
```

"""Returns: factorial of n.

Pre: n ≥ 0 an int"""

```
if n == 0:
```

```
    return 1
```

```
return n*factorial(n-1)
```

- $n! = n (n-1)!$
- $0! = 1$

Base case(s)

Recursive case

What happens if there is no base case?

### Example: Fibonacci Sequence

- Sequence of numbers: 1, 1, 2, 3, 5, 8, 13, ...

$a_0 \ a_1 \ a_2 \ a_3 \ a_4 \ a_5 \ a_6$

- Get the next number by adding previous two
- What is  $a_8$ ?

- Recursive definition:

- $a_n = a_{n-1} + a_{n-2}$  **Recursive Case**
- $a_0 = 1$  **Base Case**
- $a_1 = 1$  **(another) Base Case**

Why did we need two base cases this time?

### Fibonacci as a Recursive Function

```
def fibonacci(n):
```

"""Returns: Fibonacci no.  $a_n$


Precondition:  $n \geq 0$  an int"""

```
if n <= 1:
```

```
    return 1
```

```
return (fibonacci(n-1)+
        fibonacci(n-2))
```


- Function that calls itself
  - Each call is new frame
  - Frames require memory
  - $\infty$  calls =  $\infty$  memory



### Fibonacci: # of Frames vs. # of Calls

- Fibonacci is very inefficient.

- $fib(n)$  has a stack that is always  $\leq n$
- But  $fib(n)$  makes a lot of **redundant calls**

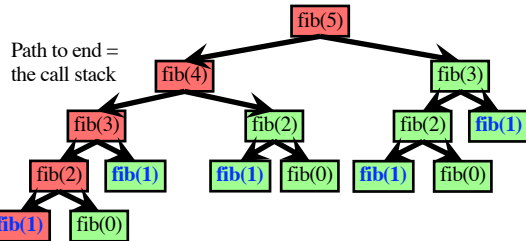

### Recursion is best for Divide and Conquer

**Goal:** Solve problem P on a piece of data



**Idea:** Split data into two parts and solve problem



Solve Problem P      Solve Problem P

**Combine Answer!**

### Divide and Conquer Example

---

Count the number of 'e's in a string:

p	e	n	n	e
---	---	---	---	---

Two 'e's

---

p	e
---	---

+

n	n	e
---	---	---

One 'e'

One 'e'

### Three Steps for Divide and Conquer

---

1. **Decide what to do on "small" data**
  - Some data cannot be broken up
  - Have to compute this answer directly
2. **Decide how to break up your data**
  - Both "halves" should be smaller than whole
  - Often no wrong way to do this (next lecture)
3. **Decide how to combine your answers**
  - Assume the smaller answers are correct
  - Combining them should give bigger answer

### Divide and Conquer Example

---

```
def num_es(s):
    """Returns: # of 'e's in s"""
    # 1. Handle small data
    if s == '':
        | return 0
    elif len(s) == 1:
        | return 1 if s[0] == 'e' else 0

    # 2. Break into two parts
    left = num_es(s[0])
    right = num_es(s[1:])

    # 3. Combine the result
    return left+right
```

“Short-cut” for

```
if s[0] == 'e':
    return 1
else:
    return 0
```

s[0]	s[1:]
p	e n n e

0 + 2

### Exercise: Remove Blanks from a String

---

```
def deblank(s):
    """Returns: s w/o blanks"""
    if s == '':
        | return s
    elif len(s) == 1:
        | return '' if s[0] == ' ' else s

    left = deblank(s[0])
    right = deblank(s[1:])

    return left+right
```

Handle small data

Break up the data

Combine answers

### Minor Optimization

---

```
def deblank(s):
    """Returns: s w/o blanks"""
    if s == '':
        | return s

    left = s[0]
    if s[0] == ' ':
        | left = ''
    right = deblank(s[1:])

    return left+right
```

Eliminate the second base by combining

Less recursive calls

### Following the Recursion

---

deblank	a	b	c
---------	---	---	---

<del>deblank</del>	a	b	c
--------------------	---	---	---

a	deblank	b	c
---	---------	---	---

<del>a</del>	deblank	b	c
--------------	---------	---	---

b	deblank	c
---	---------	---

<del>b</del>	deblank	c
--------------	---------	---

c	deblank	
---	---------	--

<del>c</del>	deblank	
--------------	---------	--