

Lecture 16

# **Nested Lists and Dictionaries**

# Announcements for This Lecture

---

## Prelim and Regrades

---

- Prelim 1 is now graded
  - Solution posted in CMS
  - **Mean:** 80.5, **Median:** 87
- What are letter grades?
  - **A:** 85+ (consultant level)
  - **B:** 65-84 (major level)
  - **C:** 40-64 (passing)
- Regrades are now open
  - But you can lose points!



## Assignments/Videos

---

- View the lesson videos
  - **Lesson 18** today
  - **Videos 19.1-16.7** today also
  - **Videos 20.1-20.8** next time
- Should be working on A4
  - Tasks 1-3 by Saturday
  - Task 4 by Monday
  - Task 5 by Wednesday

# Lists of Objects


- List positions are variables
  - Can store base types
  - But cannot store folders
  - Can store folder identifiers

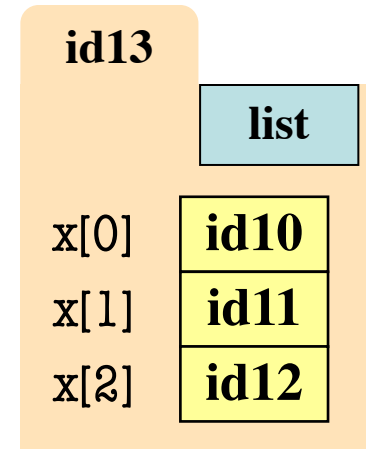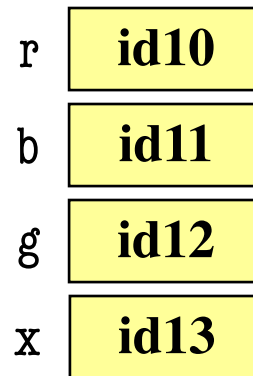

- Folders linking to folders
  - Top folder for the list
  - Other folders for contents

- Example:

```
>>> r = introcs.RGB(255,0,0)
>>> b = introcs.RGB(0,0,255)
>>> g = introcs.RGB(0,255,0)
>>> x = [r,b,g]
```

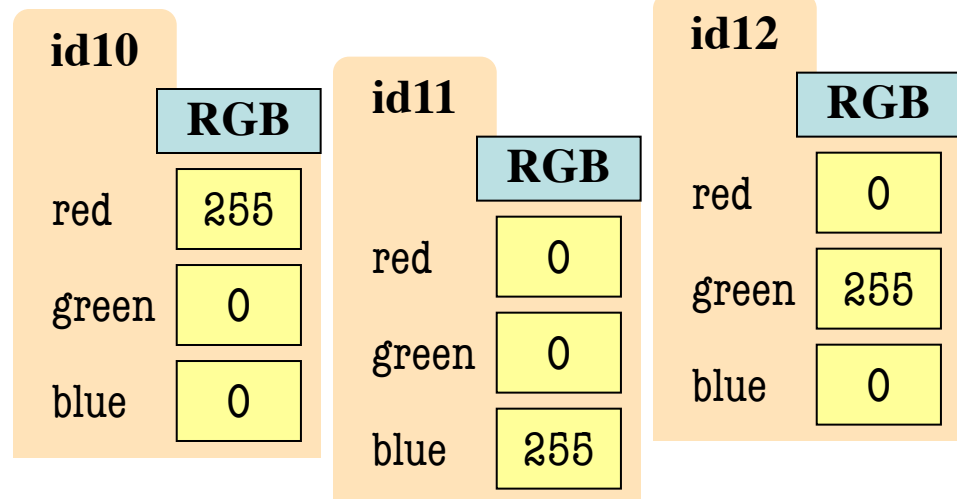


# Lists of Objects

- List positions are variables
  - Can store base types
  - But cannot store folders
  - Can store folder identifiers
- Folders linking to folders
  - Top folder for the list
  - Other folders for contents

- Example:

```
>>> r = introcs.RGB(255,0,0)
>>> b = introcs.RGB(0,0,255)
>>> g = introcs.RGB(0,255,0)
>>> x = [r,b,g]
```

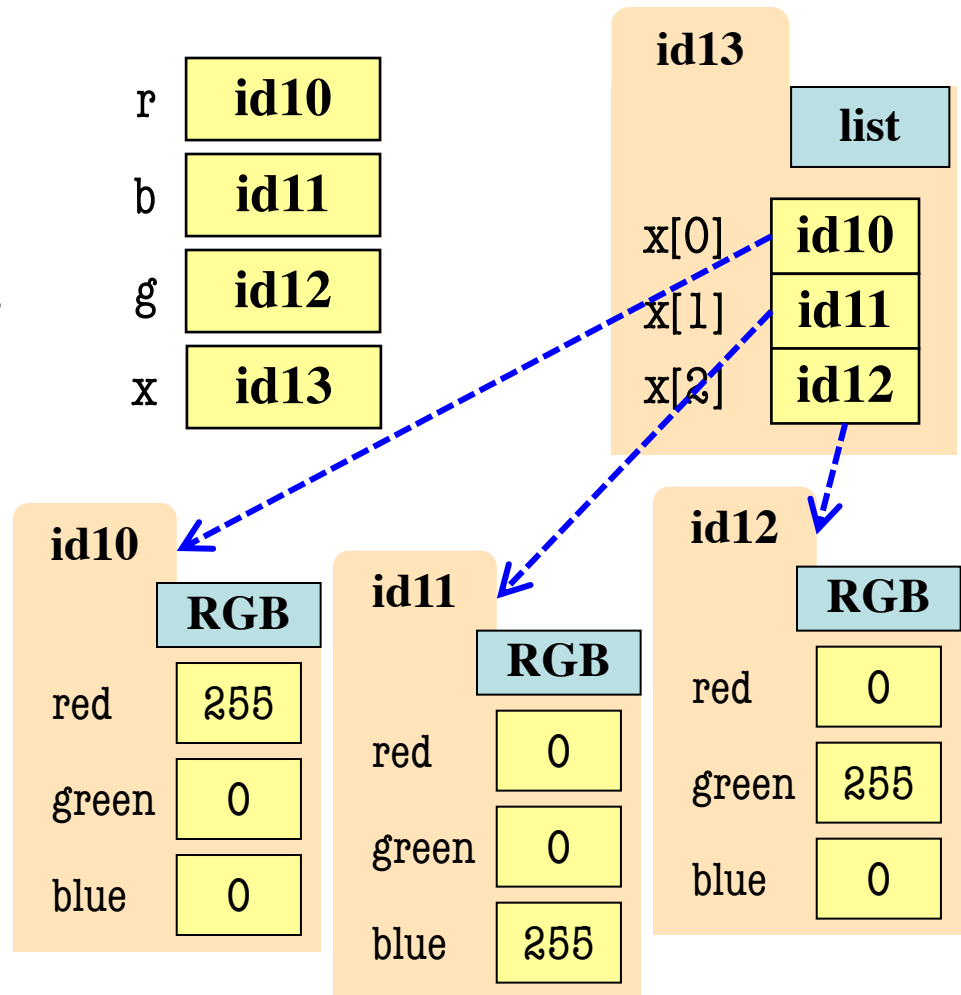

# Nested Lists


- Lists can hold any objects
- Lists are objects
- Therefore lists can hold other lists!

`a = [2, 1]`

`b = [3, 1]`


`c = [1, 4, b]`

`x = [1, a, c, 5]`

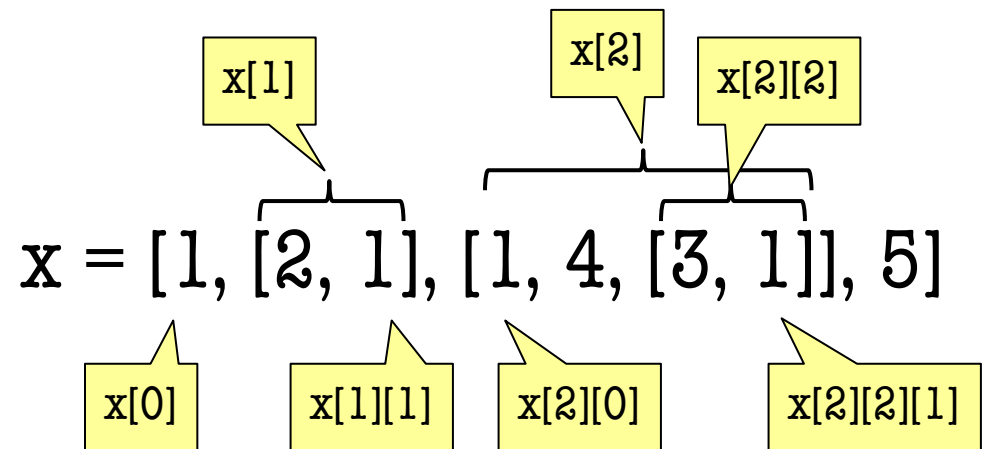

# How Multidimensional Lists are Stored


- `b = [[9, 6, 4], [5, 7, 7]]`

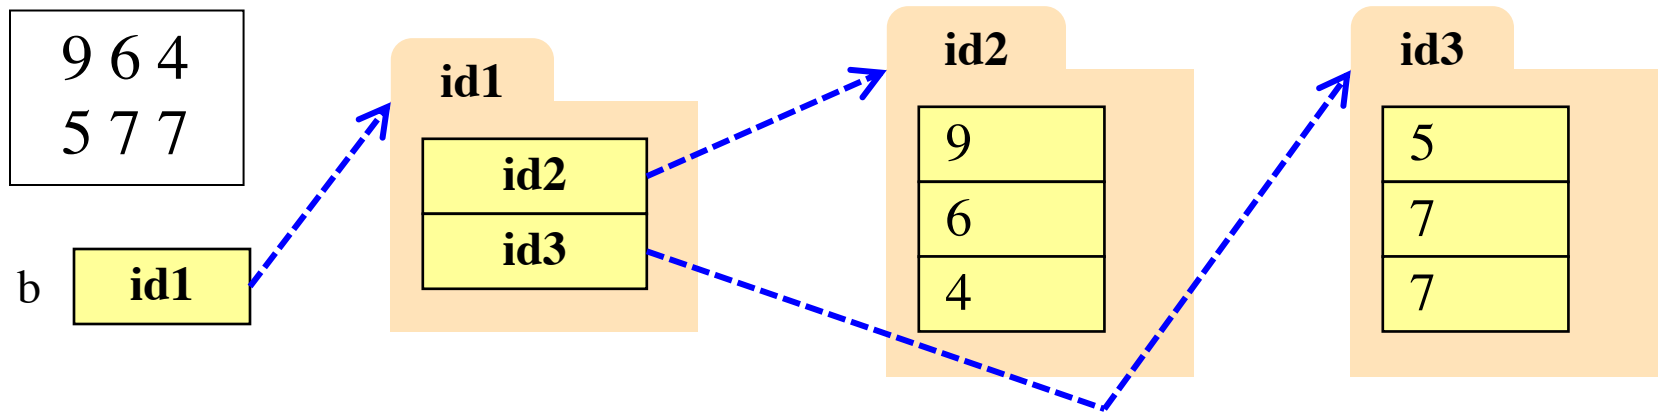


- `b` holds name of a two-dimensional list
  - Has `len(b)` elements
  - Its elements are (the names of) 1D lists
- `b[i]` holds the name of a one-dimensional list (of ints)
  - Has `len(b[i])` elements

# Ragged Lists vs Tables

- Ragged is 2d uneven list:  $b = [[17,13,19],[28,95]]$

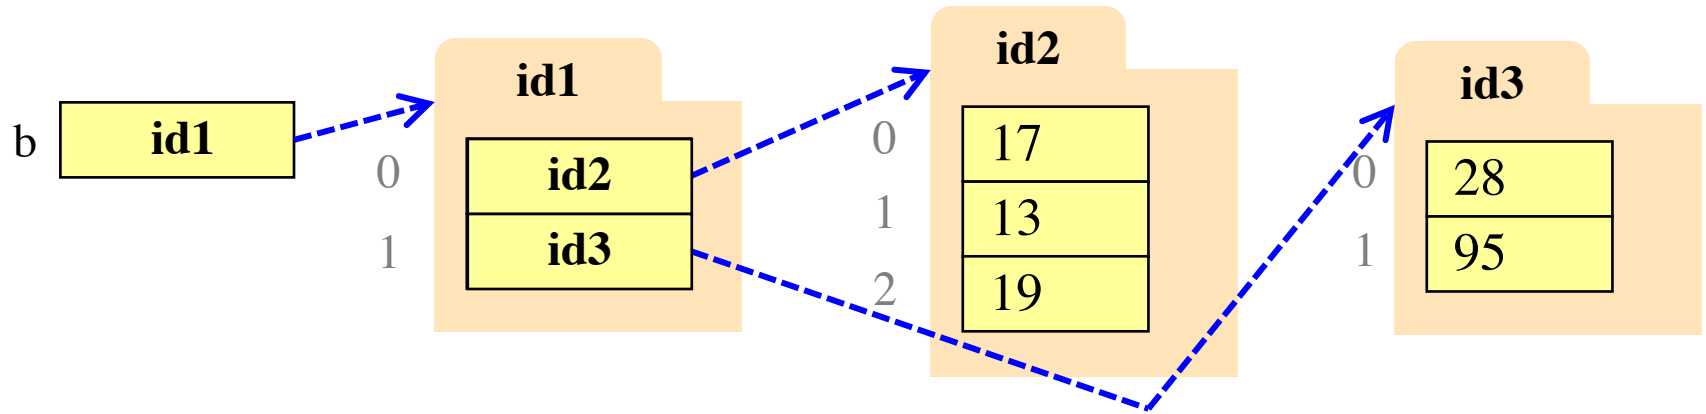

- Table is 2d uniform list:  $b = [[9,6,4],[5,7,7]]$

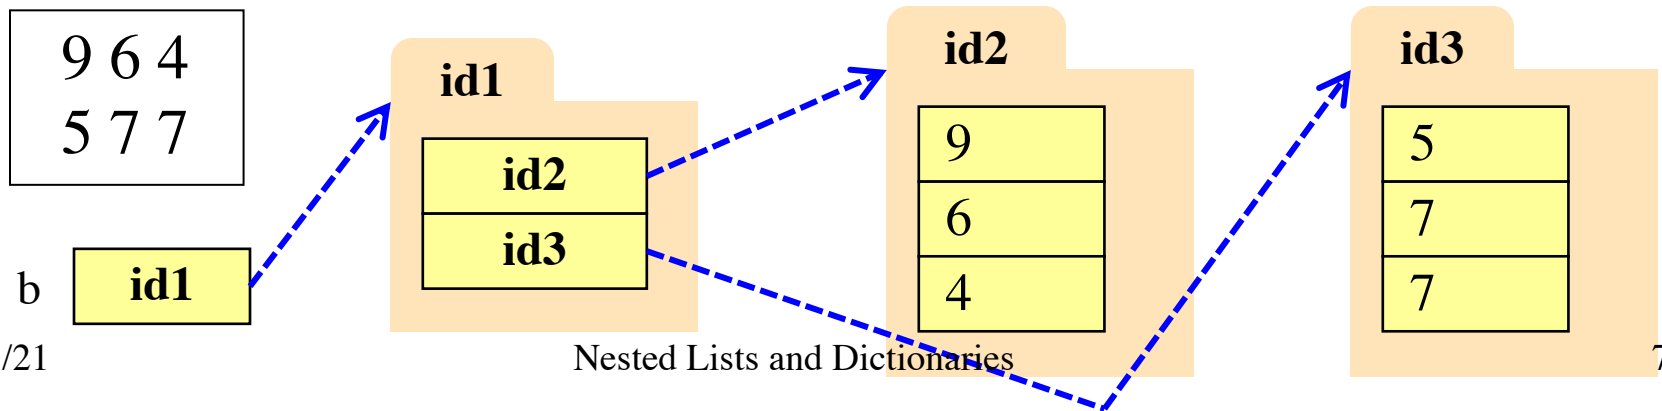


# Nested Lists can Represent Tables

## Spreadsheet

	0	1	2	3
0	5	4	7	3
1	4	8	9	7
2	5	1	2	3
3	4	1	2	9
4	6	7	8	0

**table.csv**

## Image

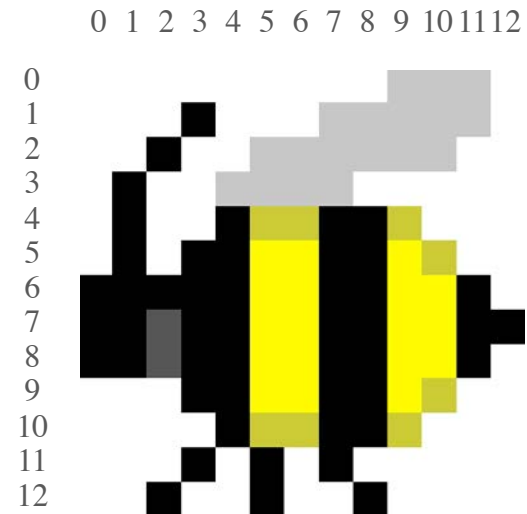

**smile.xlsx**



# Representing Tables as Lists

## Spreadsheet


	0	1	2	3
0	5	4	7	3
1	4	8	9	7
2	5	1	2	3
3	4	1	2	9
4	6	7	8	0

Each row,  
col has a  
value



- Represent as 2d list
  - Each table row a list
  - List of all rows
  - **Row major order**
- Column major exists
  - Less common to see
  - Limited to some scientific applications

```
d = [[5,4,7,3],[4,8,9,7],[5,1,2,3],[4,1,2,9],[6,7,8,0]]
```

# Image Data: 2D Lists of Pixels

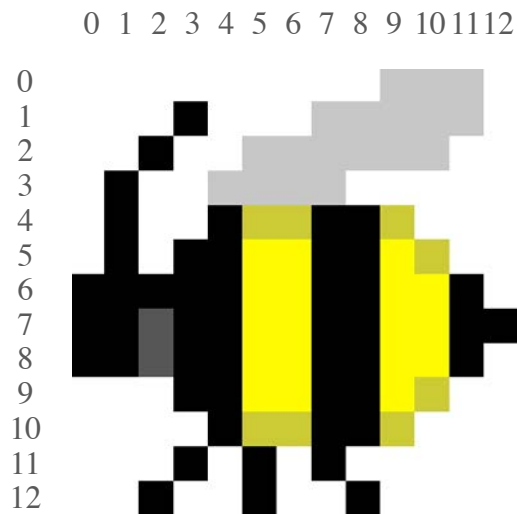

**smile.py**

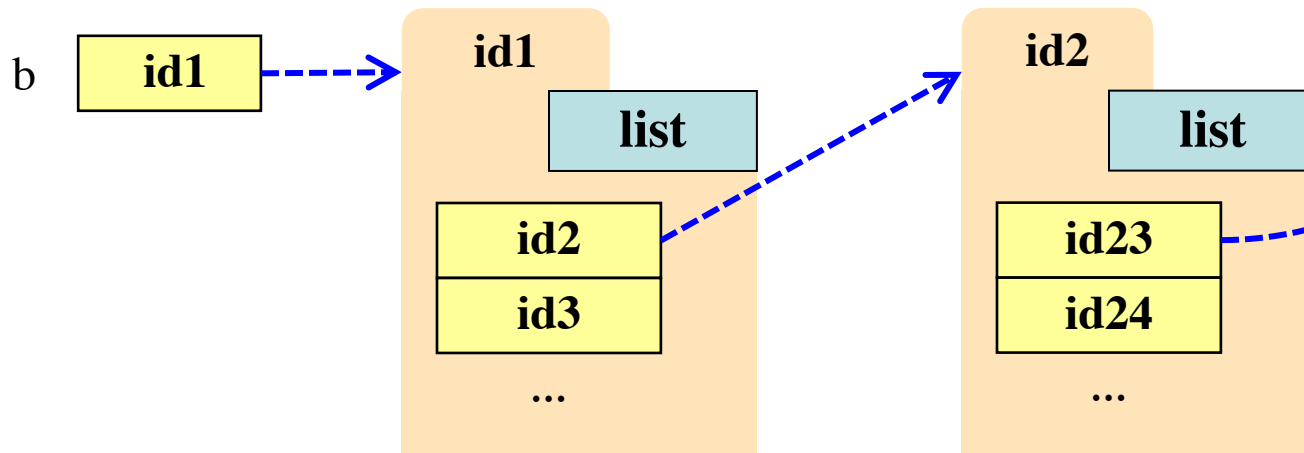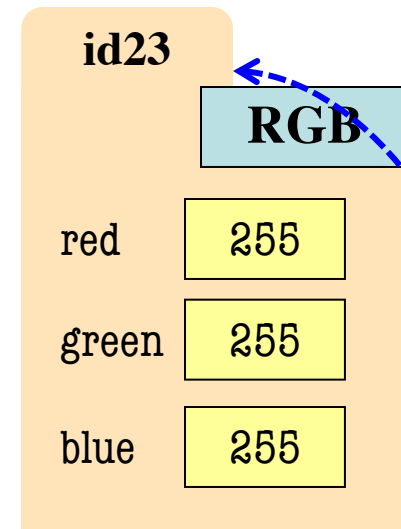

# Overview of Two-Dimensional Lists

---

- Access value at row 3, col 2:

`d[3][2]`

- Assign value at row 3, col 2:

`d[3][2] = 8`


- **An odd symmetry**

- Number of rows of `d`: `len(d)`
- Number of cols in row `r` of `d`: `len(d[r])`


	0	1	2	3
d 0	5	4	7	3
1	4	8	9	7
2	5	1	2	3
3	4	1	2	9
4	6	7	8	0

# Slices and Multidimensional Lists

- Only “top-level” list is copied.
- Contents of the list are not altered
- $b = [[9, 6], [4, 5], [7, 7]]$

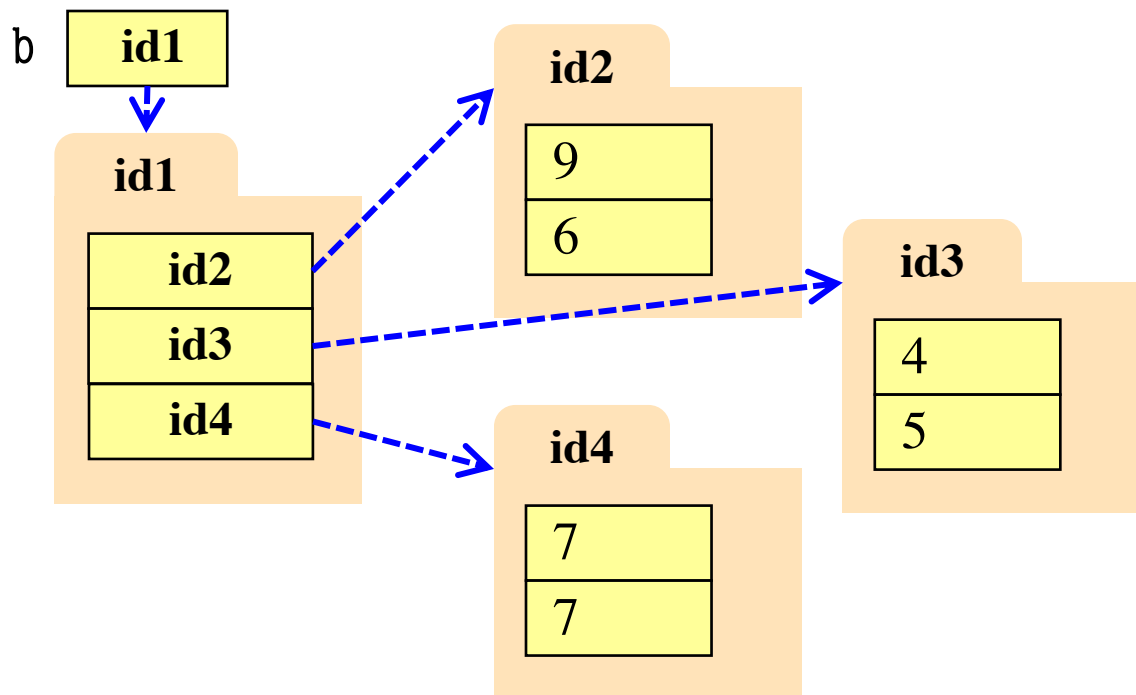


$x = b[:2]$

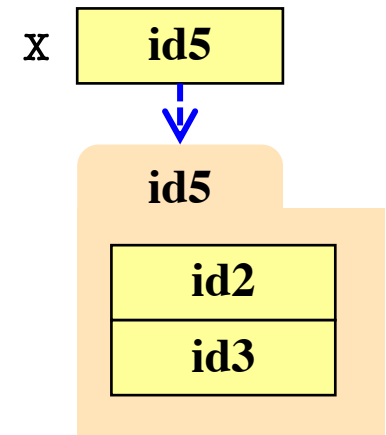

# Slices and Multidimensional Lists

- Only “top-level” list is copied.
- Contents of the list are not altered
- $b = [[9, 6], [4, 5], [7, 7]]$

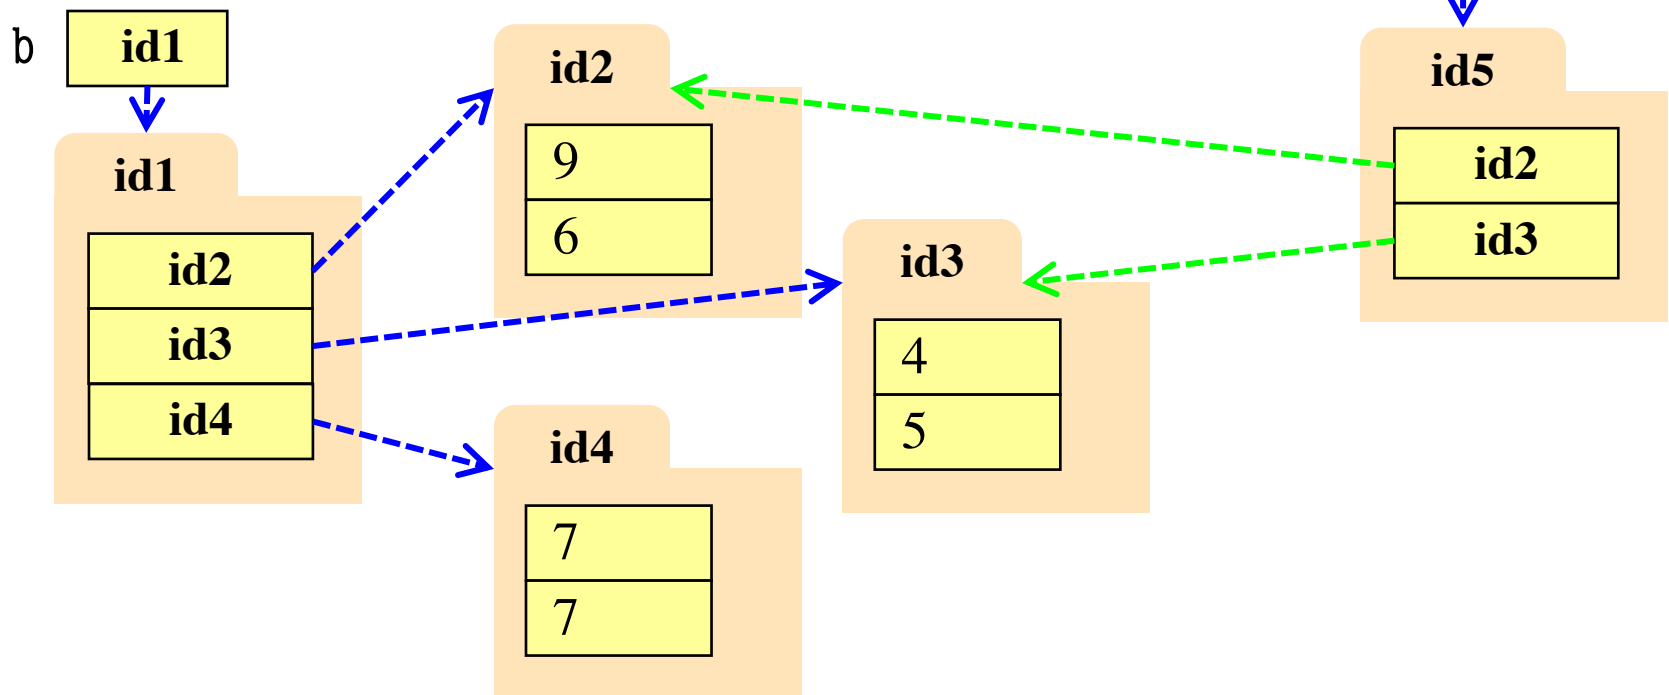

# Slices and Multidimensional Lists

---

- Create a nested list  

```
>>> b = [[9,6],[4,5],[7,7]]
```
- Get a slice  

```
>>> x = b[:2]
```
- Append to a row of x  

```
>>> x[1].append(10)
```
- x now has nested list  

```
[[9, 6], [4, 5, 10]]
```

- What are the contents of the list (with name) **b**?

A: [[9,6],[4,5],[7,7]]

B: [[9,6],[4,5,10]]

C: [[9,6],[4,5,10],[7,7]]

D: [[9,6],[4,10],[7,7]]

E: I don't know

# Slices and Multidimensional Lists

- Create a nested list  

```
>>> b = [[9,6],[4,5],[7,7]]
```
- Get a slice  

```
>>> x = b[:2]
```
- Append to a row of x  

```
>>> x[1].append(10)
```
- x now has nested list  

```
[[9, 6], [4, 5, 10]]
```

- What are the contents of the list (with name) in **b**?

A: [[9,6],[4,5],[7,7]]

B: [[9,6],[4,5,10]]

C: [[9,6],[4,5,10],[7,7]]

D: [[9,6],[4,10],[7,7]]

E: I don't know

# Shallow vs. Deep Copy

---

- **Shallow copy:** Copy top-level list
  - Happens when slice a multidimensional list
- **Deep copy:** Copy top and all nested lists
  - Requires a special function: `copy.deepcopy`
- **Example:**

```
>>> import copy
```

```
>>> a = [[1,2],[2,3]]
```

```
>>> b = a[:]           # Shallow copy
```

```
>>> c = copy.deepcopy(a) # Deep copy
```



# Functions over Nested Lists

---

- Functions on nested lists similar to lists
  - Go over (nested) list with *for-loop*
  - Use *accumulator* to gather the results
- But two important differences
  - Need **multiple for-loops**
  - One for each part/dimension of loop
  - In some cases need **multiple accumulators**
  - Latter true when result is new table

# Simple Example

```
def all_nums(table):
```

```
    """Returns True if table contains only numbers
```

```
    Precondition: table is a (non-ragged) 2d List"""
```

```
    result = True
```

Accumulator

```
    # Walk through table
```

```
    for row in table:
```

First Loop

```
        # Walk through the row
```

```
        for item in row:
```

Second Loop

```
            if not type(item) in [int,float]:
```

```
                result = False
```

```
    return result
```

# Transpose: A Trickier Example

```
def transpose(table):
```

```
    """Returns: copy of table with rows and columns swapped  
    Precondition: table is a (non-ragged) 2d List"""
```


```
    result = []                # Result (new table) accumulator
```

```
    # Loop over columns
```

```
        # Add each column as a ROW to result
```

```
    return result
```

1	2
3	4
5	6



1	3	5
2	4	6

# Transpose: A Trickier Example

```
def transpose(table):
```

```
    """Returns: copy of table with rows and columns swapped
```

```
    Precondition: table is a (non-ragged) 2d List"""
```

```
    numrows = len(table)    # Need number of rows
```

```
    numcols = len(table[0]) # All rows have same no. cols
```

```
    result = []             # Result (new table) accumulator
```

```
    for m in range(numcols):
```


```
        # Get the column elements at position m
```

```
        # Make a new list for this column
```

```
        # Add this row to accumulator table
```

```
    return result
```

1	2
3	4
5	6




1	3	5
2	4	6

# Transpose: A Trickier Example

```
def transpose(table):  
    """Returns: copy of table with rows and columns swapped  
    Precondition: table is a (non-ragged) 2d List"""  
    numrows = len(table)    # Need number of rows  
    numcols = len(table[0]) # All rows have same no. cols  
    result = []             # Result (new table) accumulator  
    for m in range(numcols):  
        row = []            # Single row accumulator  
        for n in range(numrows):  
            row.append(table[n][m]) # Create a new row list  
        result.append(row)        # Add result to table  
    return result
```

1	2
3	4
5	6



1	3	5
2	4	6

# Transpose: A Trickier Example

```
def transpose(table):
```

```
    """Returns: copy of table with rows and columns swapped
```

```
    Precondition: table is a (non-ragged) 2d List"""
```

```
    numrows = len(table)    # Need number of rows
```

```
    numcols = len(table[0]) # All rows have same no. cols
```

```
    result = []             # accumulator
```

```
    for m in range(numcols):
```

```
        row = []           # accumulator
```


```
        for n in range(numrows):
```

```
            row.append(table[n][m]) # Create a new row list
```

```
        result.append(row)         # Add result to table
```

```
    return result
```

1	2
3	4
5	6



1	3	5
2	4	6

Accumulator  
for each loop

# A Mutable Example

```
def add_ones(table):
```

```
    """Adds one to every number in the table
```

```
    Preconditions: table is a 2d List,
```

```
    all table elements are int"""
```


```
    # Walk through table
```

```
        # Walk through each column
```

```
            # Add 1 to each element
```

```
    # No return statement
```

1	3	5
2	4	6



2	4	6
3	5	7

# A Mutable Example

```
def add_ones(table):
```

```
    """Adds one to every number in the table
```

```
    Preconditions: table is a 2d List,
```

```
    all table elements are int"""
```

```
    # Walk through table
```

```
    for rpos in range(len(table)):
```

```
        # Walk through each column
```


```
        for cpos in range(len(table[rpos])):
```

```
            table[rpos][cpos] = table[rpos][cpos]+1
```

```
    # No return statement
```

Do not loop  
over the table

1	3	5
2	4	6



2	4	6
3	5	7



# Key-Value Pairs

---

- The last built-in type: **dictionary** (or **dict**)
  - One of the most important in all of Python
  - Like a list, but built of key-value pairs
- **Keys:** Unique identifiers
  - Think social security number
  - At Cornell we have netids: jrs1
- **Values:** Non-unique Python values
  - John Smith (class '13) is jrs1
  - John Smith (class '16) is jrs2

**Idea:** Lookup values by keys

# Basic Syntax


---

- Create with format: {k1:v1, k2:v2, ...}
  - Both keys and values must exist
  - **Ex:** d={'jrs1':'John','jrs2':'John','wmw2':'Walker'}
- **Keys** must be **non-mutable**
  - ints, floats, bools, strings, tuples
  - **Not** lists or custom objects
  - Changing a key's contents hurts lookup
- **Values** can be **anything**

# Using Dictionaries (Type dict)

- Access elts. like a list
  - `d['jrs1']` evals to `'John'`
  - `d['jrs2']` does too
  - `d['wmw2']` evals to `'Walker'`
  - `d['abc1']` is an **error**
- Can test if a key exists
  - `'jrs1' in d` evals to `True`
  - `'abc1' in d` evals to `False`
- But cannot slice ranges!

```
d = {'jrs1':'John','jrs2':'John',  
     'wmw2':'Walker'}
```

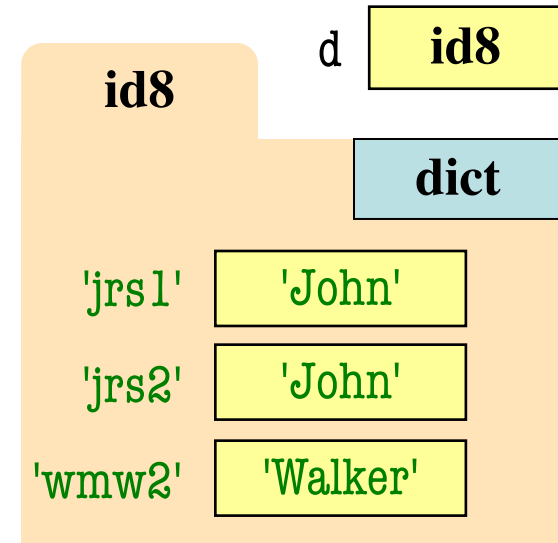

Key-Value order in folder is not important

# Dictionaries Can be Modified

- **Can reassign values**

- `d['jrs1'] = 'Jane'`
- Very similar to lists


- Can add new keys

- `d['aaa1'] = 'Allen'`
- Do not think of order

- Can delete keys

- `del d['wmw2']`
- Deletes both key, value


```
d = {'jrs1':'John','jrs2':'John',  
     'wmw2':'Walker'}
```

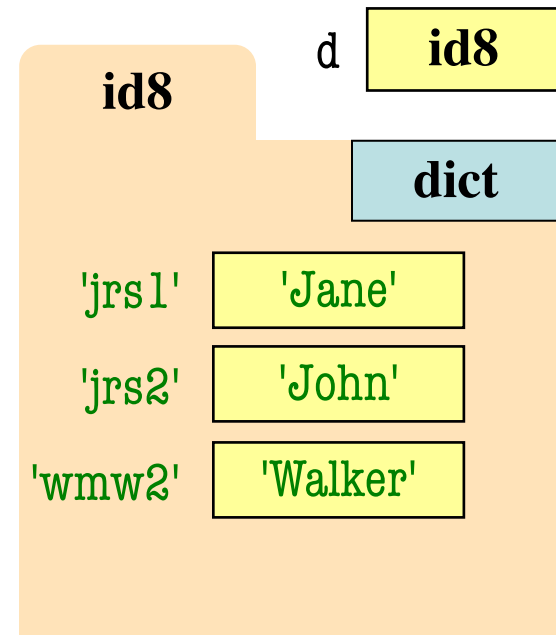

# Dictionaries Can be Modified

- Can reassign values
  - `d['jrs1'] = 'Jane'`
  - Very similar to lists
- **Can add new keys**
  - `d['aaa1'] = 'Allen'`
  - Do not think of order
- Can delete keys
  - `del d['wmw2']`
  - Deletes both key, value

```
d = {'jrs1':'John','jrs2':'John',  
     'wmw2':'Walker'}
```

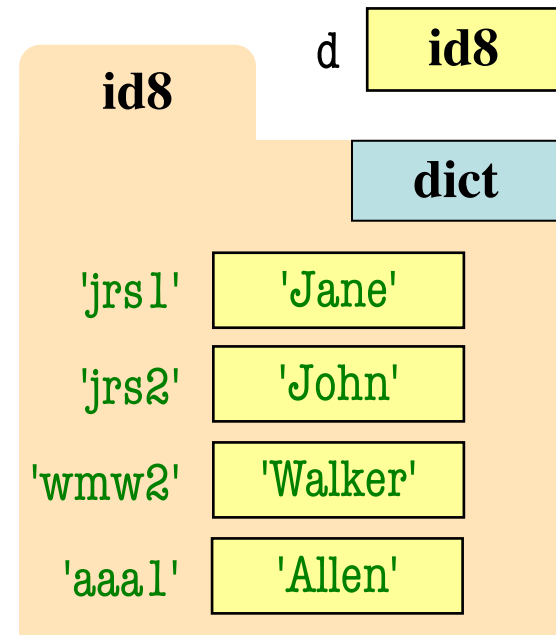

# Dictionaries Can be Modified

- Can reassign values

- `d['jrs1'] = 'Jane'`
- `d['jrs2'] = 'John'`
- `d['wmw2'] = 'Walker'`
- Very similar to lists


Change key = Delete + Add

- Can add new keys

- `d['aaa1'] = 'Allen'`
- Do not think of order

- **Can delete keys**

- `del d['wmw2']`
- Deletes both key, value

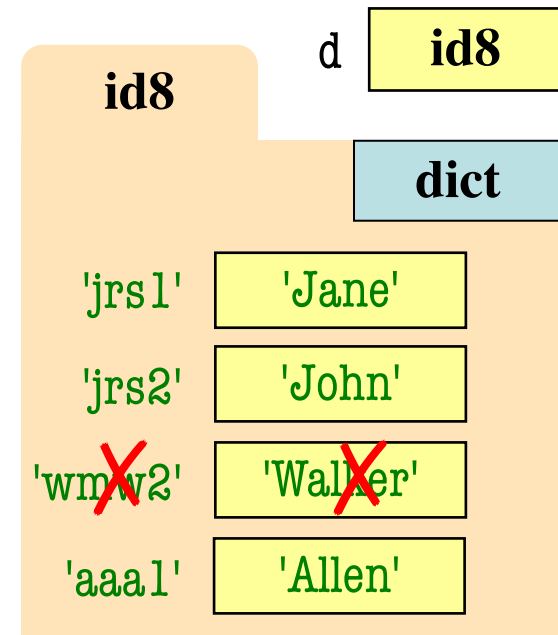

# Nesting Dictionaries

---

- Remember, values can be anything
  - Only restrictions are on the keys
- Values can be lists (**Visualizer**)
  - $d = \{ 'a': [1, 2], 'b': [3, 4] \}$
- Values can be other dicts (**Visualizer**)
  - $d = \{ 'a': \{ 'c': 1, 'd': 2 \}, 'b': \{ 'e': 3, 'f': 4 \} \}$
- Access rules similar to nested lists
  - **Example:**  $d['a']['d'] = 10$

# Example: JSON File

```
{
  "wind" : {
    "speed" : 13.0,
    "crosswind" : 5.0
  },
  "sky" : [
    {
      "cover" : "clouds",
      "type" : "broken",
      "height" : 1200.0
    },
    {
      "type" : "overcast",
      "height" : 1800.0
    }
  ]
}
```

Nested Dictionary

Nested List

Nested Dictionary

- **JSON:** File w/ Python dict
  - Actually, minor differences
- weather.json:
  - Weather measurements at Ithaca Airport (2017)
  - **Keys:** Times (Each hour)
  - **Values:** Weather readings
- This is a *nested* JSON
  - Values are also dictionaries
  - Containing more dictionaries
  - And also containing lists



# Dictionaries: Iterable, but not Sliceable

---

- Can loop over a dict
  - Only gives you the keys
  - Use key to access value

```
for k in d:  
    # Loops over keys  
    print(k)      # key  
    print(d[k])  # value
```

- Can iterate over values
  - **Method:** `d.values()`
  - But no way to get key
  - Values are not unique

```
# To loop over values only  
for v in d.values():  
    print(v)      # value
```

# Other Iterator Methods

---

- **Keys:** `d.keys()`
  - Same as a normal loop
  - Good for *extraction*
  - `keys = list(d.keys())`

```
for k in d.keys():  
    # Loops over keys  
    print(k)      # key  
    print(d[k])  # value
```

- **Items:** `d.items()`
  - Gives key-value pairs
  - Elements are tuples
  - Specialized uses

```
for pair in d.items():  
    print(pair[0]) # key  
    print(pair[1]) # value
```

# Other Iterator Methods

- **Keys:** `d.keys()`
  - Same as a normal loop
  - Good for *extraction*
  - keys

```
for k in d.keys():  
    # Loops over keys  
    print(k)      # key  
    print(d[k])  # value
```

So mostly like loops over lists

- **Items:** `d.items()`
  - Gives key-value pairs
  - Elements are tuples
  - Specialized uses

```
for pair in d.items():  
    print(pair[0]) # key  
    print(pair[1]) # value
```

# Dictionary Loop with Accumulator

---

```
def max_grade(grades):
```

```
    """Returns max grade in the grade dictionary
```

```
    Precondition: grades has netids as keys, ints as values"""
```

```
    maximum = 0                # Accumulator
```

```
    # Loop over keys
```

```
    for k in grades:
```

```
        | if grades[k] > maximum:
```

```
        |     | maximum = grades[k]
```

```
    return maximum
```

# Mutable Dictionary Loops

---


- Restrictions are different than list
  - Okay to loop over dictionary being changed
  - You are looping over *keys*, not *values*
  - Like looping over positions
- But you **may not add or remove** keys!
  - Any attempt to do this will fail
  - Have to create a key list if you want to do

# A Subtle Difference

```
1  
2 d = {1:2}  
→ 3 for k in d.keys():  
4     d[k+1] = d[k]+1
```

<< First < Back Program terminated Forward > Last >>


RuntimeError: dictionary changed size during iteration

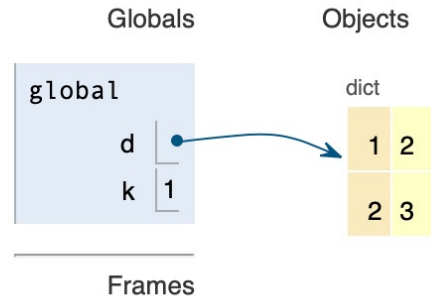

```
1  
2 d = {1:2}  
→ 3 for k in list(d.keys()):  
4     d[k+1] = d[k]+1
```

<< First < Back Program terminated Forward > Last >>

→ line that has just executed  
→ next line to execute

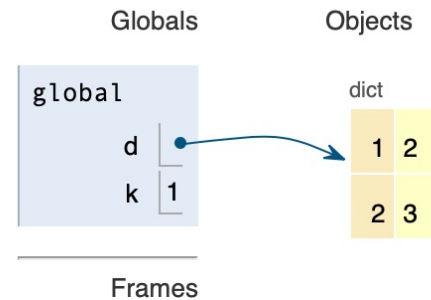

# But This is Okay

```
def give_extra_credit(grades,netids,bonus):
```

```
    """Gives bonus points to everyone in sequence netids
```

```
    Precondition: grades has netids as keys, ints as values.
```

```
    netids is a sequence of strings that are keys in grades
```

```
    bonus is an int."""
```

```
    # No accumulator. This is a procedure
```

```
    for student in grades:
```

Could also loop  
over **netids**

```
        if student in netids:                # Test if student gets a bonus
```

```
            grades[student] = grades[student]+bonus
```