


- Previous lecture
  - User-defined functions
    - Function header
    - Input parameters and return variables
- Today's lecture
  - User-defined functions
    - local memory space
    - Subfunction
  - 1-dimensional array and plot
- Announcement
  - Discussion this week in classrooms as listed in Student Center
  - Make use of consulting/office hours


Lecture 9

2

Draw a bulls eye figure with randomly placed dots



- Dots are randomly placed within concentric rings
- User decides how many rings, how many dots



Lecture 9

3

General form of a user-defined function

```
function [out1, out2, ...] = functionName (in1, in2, ...)
% 1-line comment to describe the function
% Additional description of function
```

Executable code that at some point assigns values to output parameters *out1*, *out2*, ...

- *in1*, *in2*, ... are defined when the function begins execution. Variables *in1*, *in2*, ... are called function *parameters* and they hold the function *arguments* used when the function is invoked (called).
- *out1*, *out2*, ... are not defined until the executable code in the function assigns values to them.

Lecture 9

15

Returning a value  $\neq$  printing a value

You have this function:

```
function [x, y] = polar2xy(r, theta)
% Convert polar coordinates (r,theta) to
% Cartesian coordinates (x,y). Theta in degrees.
...
```

Code to call the above function:

```
% Convert polar (r1,t1) to Cartesian (x1,y1)
r1 = 1; t1 = 30;
[x1, y1] = polar2xy(r1, t1);
plot(x1, y1, 'b*')
```

Lecture 9

16

Given this function:

```
function m = convertLength(ft,in)
% Convert length from feet (ft) and inches (in)
% to meters (m).
...
```

How many proper calls to `convertLength` are shown below?

```
% Given f and n
d = convertLength(f,n);
d = convertLength(f*12+n);
d = convertLength(f+n/12);
x = min(convertLength(f,n), 1);
y = convertLength(pi*(f+n/12)^2);
```

A: 1

B: 2

C: 3

D: 4

E: 5 or 0

Lecture 9

18

Comments in functions


- Block of **comments after the function header** is printed whenever a user types `help <functionName>` at the Command Window
- **1<sup>st</sup> line of this comment block** is searched whenever a user types `lookfor <someWord>` at the Command Window
- ➡ Every function should have a comment block after the function header that says what the function does concisely

Lecture 9

19

## Accessing your functions

For now\*, put your related functions and scripts in the same directory.

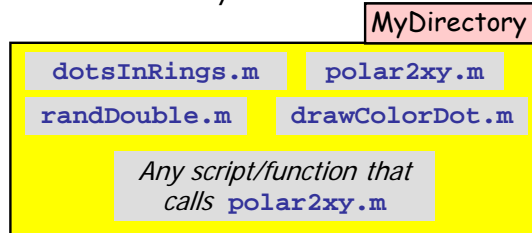

\*The path function gives greater flexibility

Lecture 9

20

## Why write user-defined function?

- Easy code re-use—great for “common” tasks
- A function can be tested independently easily
- Keep a **driver** program clean by keeping detail code in **functions**—separate, non-interacting files
- Facilitate top-down design
- Software management

Lecture 9

22

```
c= input('How many concentric rings? ');
d= input('How many dots? ');

% Put dots btwn circles with radii rRing and (rRing-1)
for rRing= 1:c
    % Draw d dots
    for count= 1:d

        % Generate random dot location (polar coord.)
        theta=_____
        r=_____

        % Convert from polar to Cartesian
        x=_____
        y=_____


        % Use plot to draw dot
    end
end
```

Each task becomes a function that can be implemented and tested independently

Lecture 9

23

## Facilitates top-down design



1. Focus on how to draw the figure given just a specification of what the function **DrawStar** does.

2. Figure out how to implement **DrawStar**.

Lecture 9

24

To specify a function...

... you describe how to use it, e.g.,

```
function DrawStar(xc,yc,r,c)
% Adds a 5-pointed star to the
% figure window. Star has radius r,
% center(xc,yc) and color c where c
% is one of 'r', 'g', 'y', etc.
```

Given the specification, the user of the function doesn't need to know the detail of the function—they can just use it!

Lecture 9

25

To implement a function...

... you write the code so that the function “lives up to” the specification. E.g.,

```
r2 = r/(2*(1+sin(pi/10)));
for k=1:11
    theta = (2*k-1)*pi/10;
    if 2*floor(k/2)~=k
        x(k) = xc + r*cos(theta);
        y(k) = yc + r*sin(theta);
    else
        x(k) = xc + r2*cos(theta);
        y(k) = yc + r2*sin(theta);
    end
end
fill(x,y,c)
```

Don't worry—you'll learn more about graphics functions and vectors soon.

Lecture 9

26

## Software Management

Today:

I write a function

`EPerimeter(a,b)`

that computes the perimeter of the ellipse

$$\left(\frac{x}{a}\right)^2 + \left(\frac{y}{b}\right)^2 = 1$$

Lecture 9

31

## Software Management

During this year :

You write software that makes extensive use of

`EPerimeter(a,b)`

Imagine hundreds of programs each with several lines that reference `EPerimeter`

Lecture 9

32

## Software Management

Next year:

I discover a more efficient way to approximate ellipse perimeters. I change the implementation of

`EPerimeter(a,b)`

You do **not** have to change your software at all.

Lecture 9

33

## Script vs. Function

- A function has its own private (local) function workspace that does **not** interact with the workspace of other functions or the Command Window workspace
  - Variables are **not** shared between workspaces even if they have the same name
- A script is executed line-by-line just as if you are typing it into the Command Window
  - The value of a variable in a script is stored in the Command Window Workspace

Lecture 9

35

What will be printed?

A: -3

B: 3

C: error

```
% Script file
p= -3;
q= absolute(p);
disp(p)
```

```
function q = absolute(p)
% q is absolute value of p
if (p<0)
    p= -p;
end
q= p;
```

Lecture 9

36

What is the output?

```
x = 1;
x = f(x+1);
y = x+1;
disp(y)
```

```
function y = f(x)
x = x+1;
y = x+1;
```

A: 1

B: 2

C: 3

D: 4

E: 5

Lecture 9

52

Execute the statement `y = foo(x)`

- Matlab looks for a function called `foo` (m-file called `foo.m`)
- Argument (value of `x`) is copied into function `foo`'s **local parameter**
  - called "pass-by-value," one of several argument passing schemes used by programming languages
- Function code executes **within its own workspace**
- At the end, the function's **output argument** (value) is sent from the function to the place that calls the function. E.g., the value is assigned to `y`.
- Function's **workspace is deleted**
  - If `foo` is called again, it starts with a new, empty workspace

Lecture 9

54

## Subfunction

- There can be more than one function in an M-file
- top** function is the main function and has the name of the file
- remaining functions are **subfunctions, accessible only by the functions in the same m-file**
- Each (sub)function in the file begins with a **function header**
- Keyword `end` is not necessary at the end of a (sub)function

Lecture 9

57

1-d array: **vector**

- An array is a **named** collection of **like** data organized into rows or columns
- A 1-d array is a row or a column, called a **vector**
- An **index** identifies the **position** of a value in a vector

<b>v</b>	.8	.2	1
	1	2	3

Lecture 11

59

## Here are a few different ways to create a vector

`count = zeros(1,6)`

count 0 0 0 0 0 0

Similar functions: `ones`, `rand``a = linspace(10,30,5)`

a 10 15 20 25 30

`b = 7:-2:0`

b 7 5 3 1

`c = [3 7 2 1]`

c 3 7 2 1

`d = [3; 7; 2]`d 3  
7  
2`e = d'`

e 3 7 2

60

## Start with drawing a single line segment

```

a= 0; % x-coord of pt 1
b= 1; % y-coord of pt 1
c= 5; % x-coord of pt 2
d= 3; % y-coord of pt 2
plot([a c], [b d], '-*')
```


x-values  
(a vector)y-values  
(a vector)Line/marker  
format

61

## Making an x-y plot

```

a= [0 4 3 8]; % x-coords
b= [1 2 5 3]; % y-coords
plot(a, b, '-*')
```


x-values  
(a vector)y-values  
(a vector)Line/marker  
format

## Making an x-y plot with multiple graphs (lines)

```

a= [0 4 5 8];
b= [1 2 5 3];
f= [0 4 6 8 10];
g= [2 2 6 4 3];
plot(a,b,'-*',f,g,'c')
legend('graph 1 name', 'graph 2 name')
xlabel('x values')
ylabel('y values')
title('My graphs', 'FontSize',14)

```



63

## Array index starts at 1

x

5	.4	.91	-4	-1	7
1	2	3	4	5	6

Let  $k$  be the index of vector  $x$ , then

- $k$  must be a positive integer
- $1 \leq k \leq \text{length}(x)$
- To access the  $k^{\text{th}}$  element:  $x(k)$

Lecture 11

66

## Accessing values in a vector

score	93	99	87	80	85	82
	1	2	3	4	5	6

Given the vector **score** ...

```

score(4)= 80;
score(5)= (score(4)+score(5))/2;
k= 1;
score(k+1)= 99;

```

See `plotComparison2.m`

Lecture 11

68

## Drawing a polygon (multiple line segments)

```

% Draw a rectangle with the lower-left
% corner at (a,b), width w, height h.

```

```

x= [          ]; % x data
y= [          ]; % y data
plot(x, y)

```

Fill in the missing vector values!

Lecture 11


69

```

x= [0.1 -9.2 -7 4.4];
y= [9.4 7 -6.2 -3];
fill(x,y,'g')

```

Can be a vector  
(RGB values)



Lecture 11

73