

---

the  
gamedesigninitiative  
at cornell university

---

# Architecture Design

# Take Away for This Lesson

---


- What should the lead programmer do?
- How do CRC cards aid software design?
  - What goes on each card?
  - How do you lay them out?
  - What properties should they have?
- How do activity diagrams aid design?
  - How do they relate to CRC cards?
- Difference between design & documentation

# Role of Lead Programmer

---

- Make high-level **architecture decisions**
  - How are you splitting up the classes?
  - What is your computation model?
  - What is stored in the data files?
  - What third party libraries are you using?
- **Divide** the work among the **programmers**
  - Who works on what parts of the game?
  - What do they need to coordinate?

# Architecture: The Big Picture

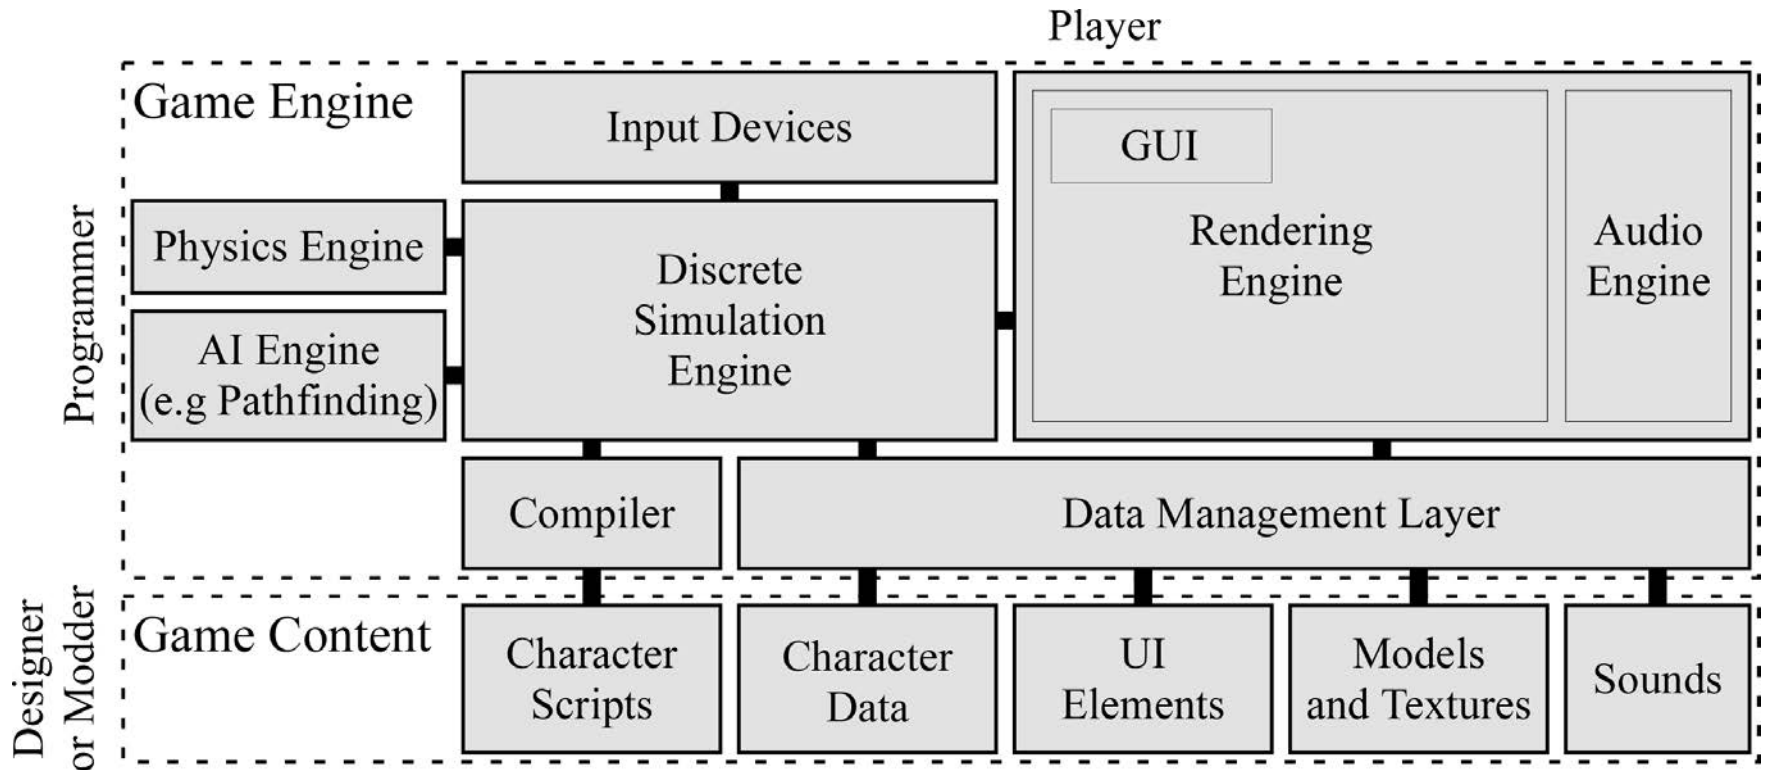


# Identify Modules (Subsystems)

---

- **Modules**: logical unit of functionality
  - Often reusable over multiple games
  - Implementation details are hidden
  - API describes interaction with rest of system
- Natural way to break down work
  - Each **programmer** decides implementation
  - But entire **team** must agree on the API
  - **Specification first, then programming**

# Architecture: The Big Picture

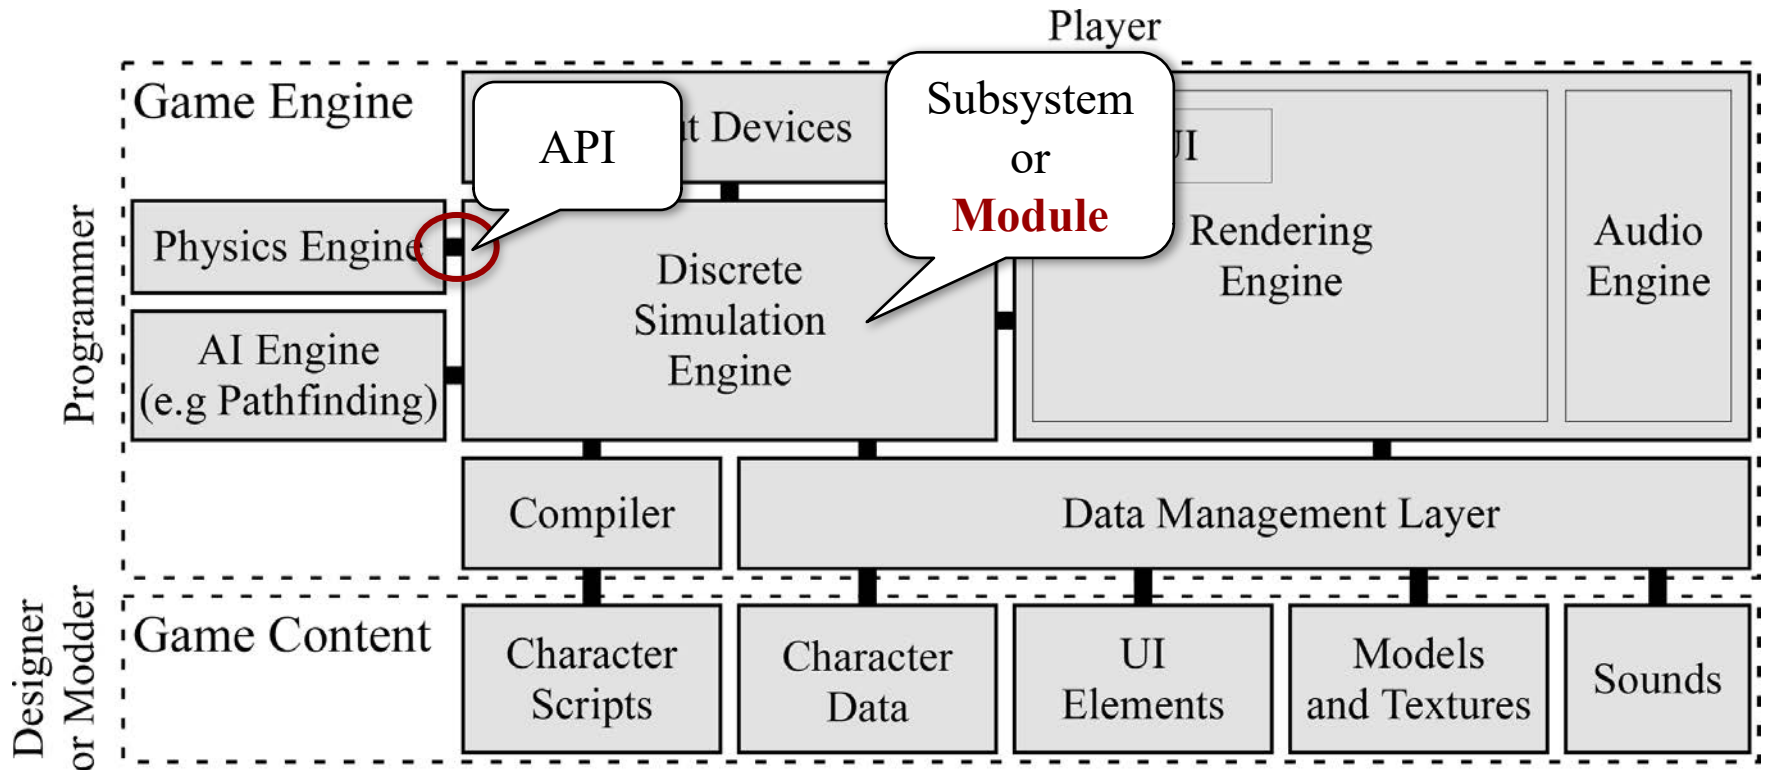

# Example: Physics Engines

---


- API to manipulate objects
  - Put physics objects in “container”
  - Specify their connections (e.g. joints)
  - Specify forces, velocity
- Everything else hidden from user
  - Collisions detected by module
  - Movement corrected by module



# Relationship Graph

---

- Shows when one module “depends” on another
  - Module A calls a method/function of Module B
  - Module A creates/loads instance of Module B
- **General Rule:** Does *A* need the API of *B*?
  - How would we know this?

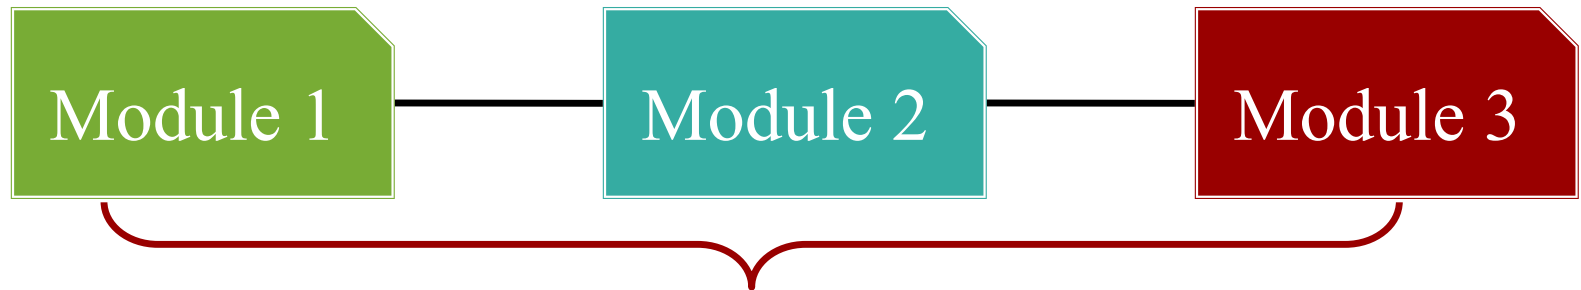


Module 1 does not “need” to know about Module 3



# Relationship Graph

---

- Edges in relationship graph are often **directed**
  - If  $A$  calls a method of  $B$ , is  $B$  aware of it?
- But often undirected in architecture diagrams
  - Direction clear from other clues (e.g. layering)
  - Developers of both modules should still agree on API

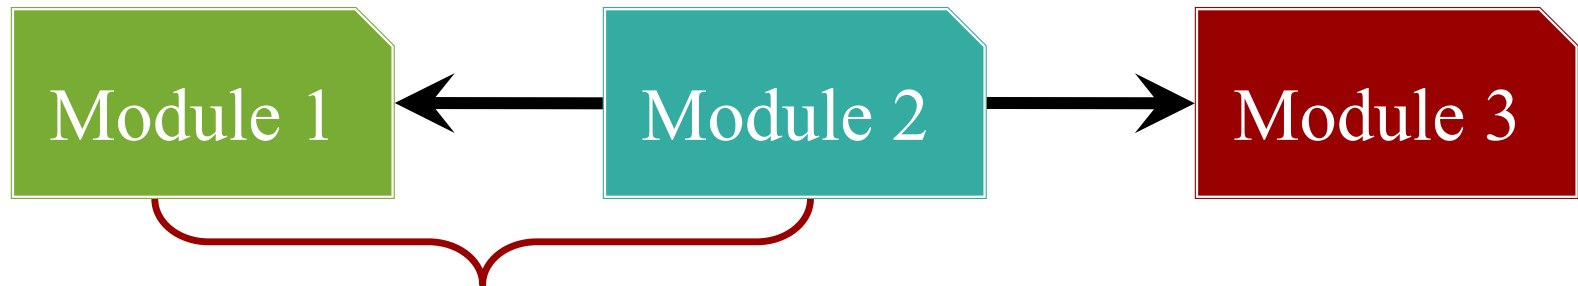


Does Module 1 need to know about Module 2?

# Dividing up Responsibilities


---

- Each programmer has a module
  - Programmer **owns** the module
  - Final word on implementation
- Owners collaborate w/ **neighbors**
  - Agree on API at graph edges
  - Call meetings “Interface Parties”
- Works, but...  
**must agree on modules and responsibilities ahead of time**

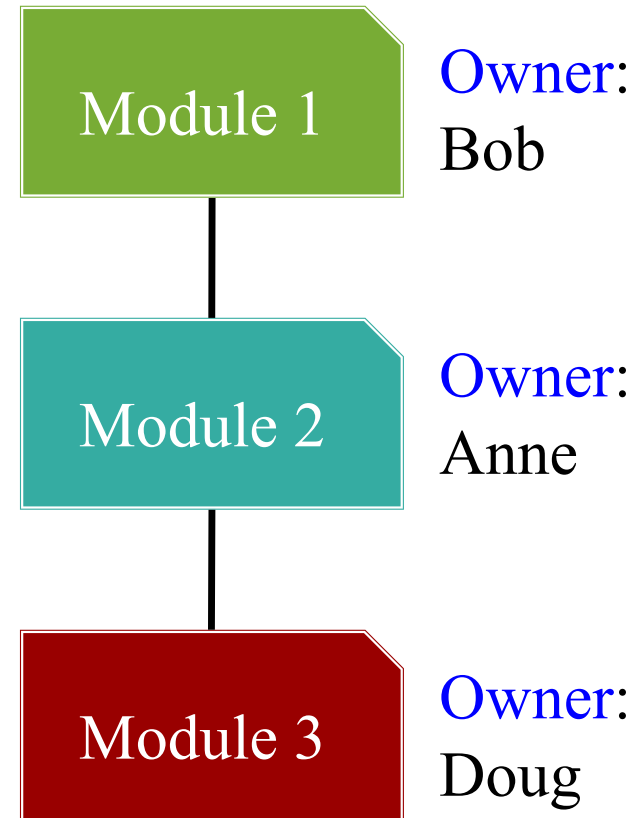


# Nested (Sub)modules

- Can do this **recursively**
  - Module is a piece of software
  - Can break into more modules
- Nested APIs are **internal**
  - Only needed by module owner
  - Parent APIs may be different!
- Critical for very **large groups**
  - Each small team gets a modules
  - Inside the team, break up further
  - Even deeper hierarchies possible

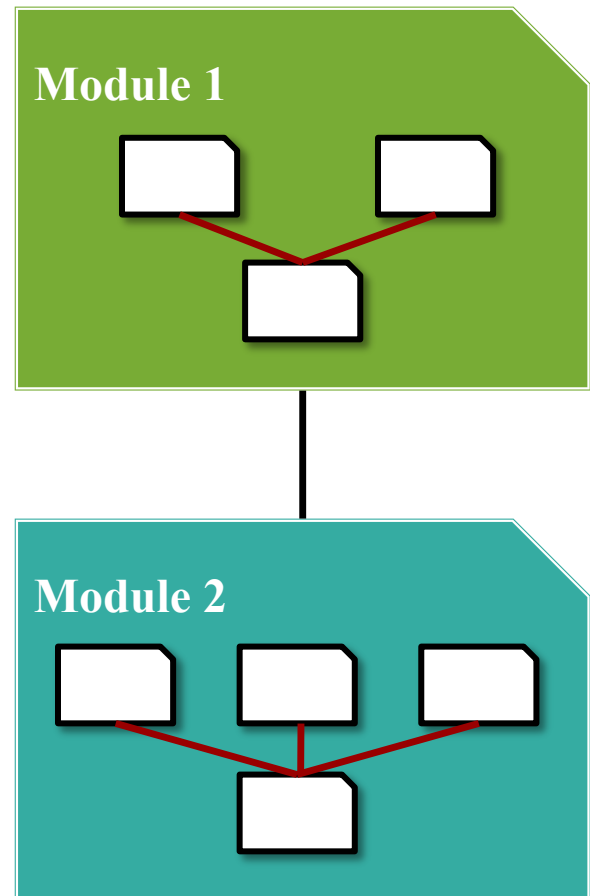

# Architecture: The Big Picture

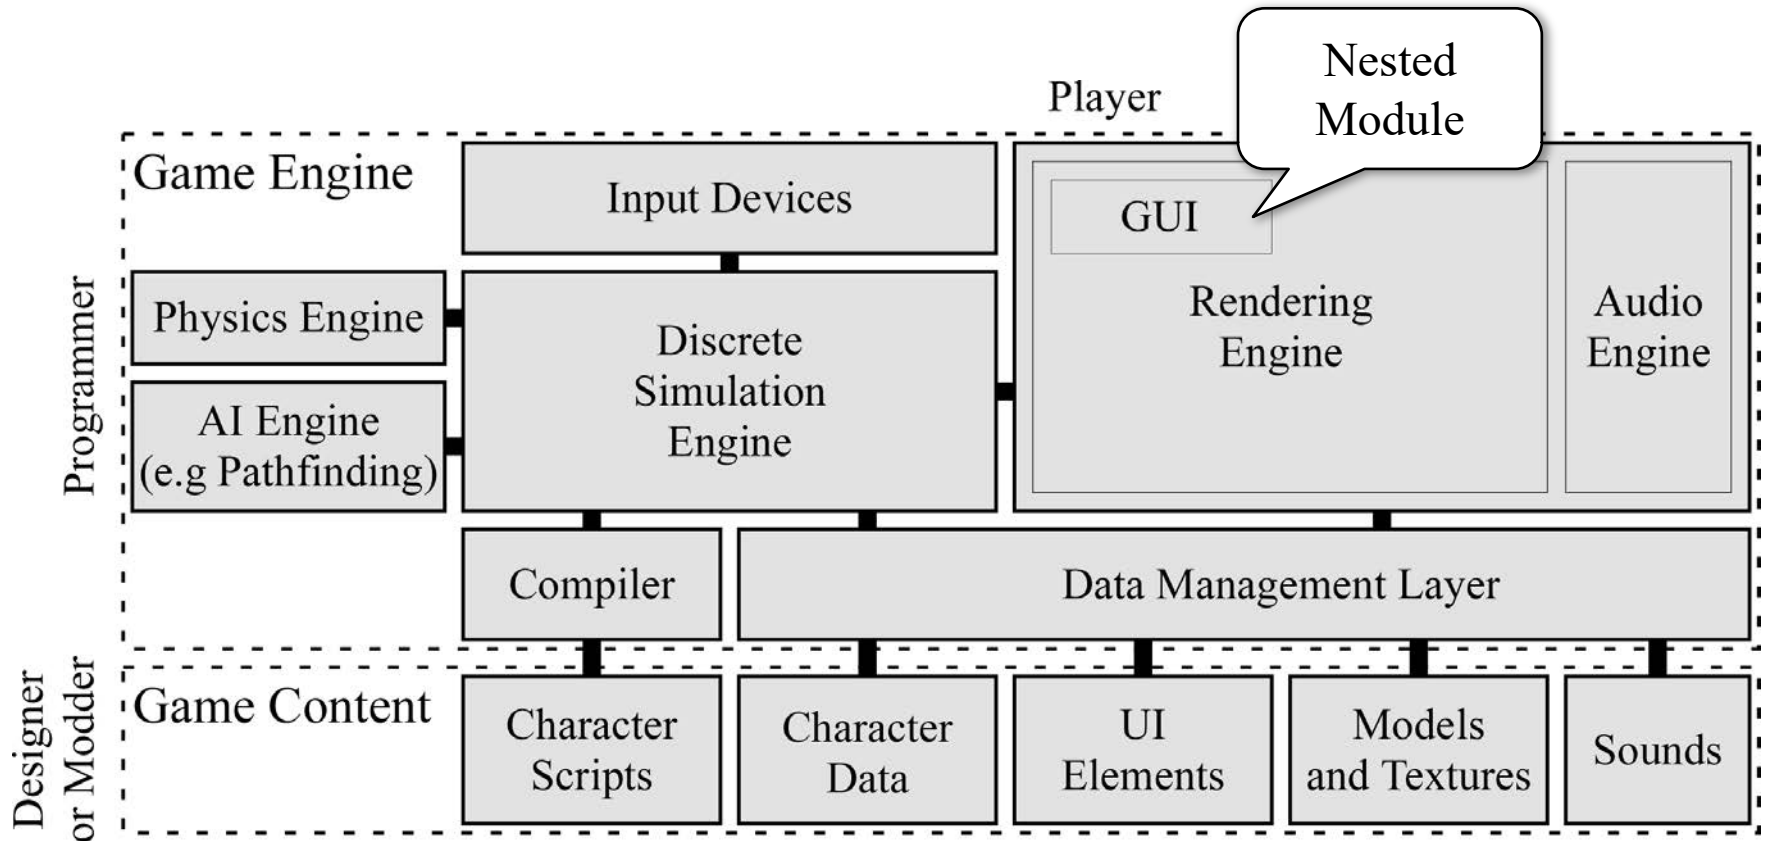

# How Do We Get Started?

---

- Remember the design caveat:
  - Must agree on module responsibilities first
  - Otherwise, code is **duplicated** or even **missing**
- Requires a **high-level architecture** plan
  - Enumeration of all the modules
  - What their responsibilities are
  - Their relationships with each other
- Responsibility of the **lead architect**

# Design: CRC Cards

---

- Class-Responsibility-Collaboration
  - **Class**: Important class in subsystem
  - **Responsibility**: What that class does
  - **Collaboration**: Other classes required
    - May be part of another subsystem
- English description of your API
  - Responsibilities become **methods**
  - Collaboration identifies **dependencies**

# CRC Card Examples

## AI Controller

| Responsibility                             | Collaboration                    |
|--|----------------------------------|
| <b>Pathfinding:</b> Avoiding obstacles     | Game Object, Scene Model         |
| <b>Strategic AI:</b> Planning future moves | Player Model, Action Model       |
| <b>Character AI:</b> NPC personality       | Game Object, Level Editor Script |

## Scene Model

| Responsibility                     | Collaboration            |
|------------------------------------|--------------------------|
| Enumerates game objects in scene   | Game Object              |
| Adds/removes game objects to scene | Game Object              |
| Selects object at mouse location   | Mouse Event, Game Object |

# CRC Card Examples

| <b>Controller</b> <b>AI Controller</b>     |                                  |
|--|----------------------------------|
| <b>Responsibility</b>                      | <b>Collaboration</b>             |
| <b>Pathfinding:</b> Avoiding obstacles     | Game Object, Scene Model         |
| <b>Strategic AI:</b> Planning future moves | Player Model, Action Model       |
| <b>Character AI:</b> NPC personality       | Game Object, Level Editor Script |

Class Name

| <b>Model</b> <b>Scene Model</b>    |                          |
|------------------------------------|--------------------------|
| <b>Responsibility</b>              | <b>Collaboration</b>     |
| Enumerates game objects in scene   | Game Object              |
| Adds/removes game objects to scene | Game Object              |
| Selects object at mouse location   | Mouse Event, Game Object |





# Creating Your Cards


---

- Start with MVC Pattern
  - Gives 3 basic subsystems
  - List responsibilities of each
  - May be all that you need (TemperatureConverter)
- Split up a module if
  - Too much for one person
  - API for module too long
- Don't need to nest (**yet**)
  - Perils of **ravioli code**


| Module 1       |               |
|----------------|---------------|
| Responsibility | Collaboration |
| ...            | ...           |
| ...            | ...           |
| ...            | ...           |

| Module 2       |               |
|----------------|---------------|
| Responsibility | Collaboration |
| ...            | ...           |
| ...            | ...           |
| ...            | ...           |

# Application Structure

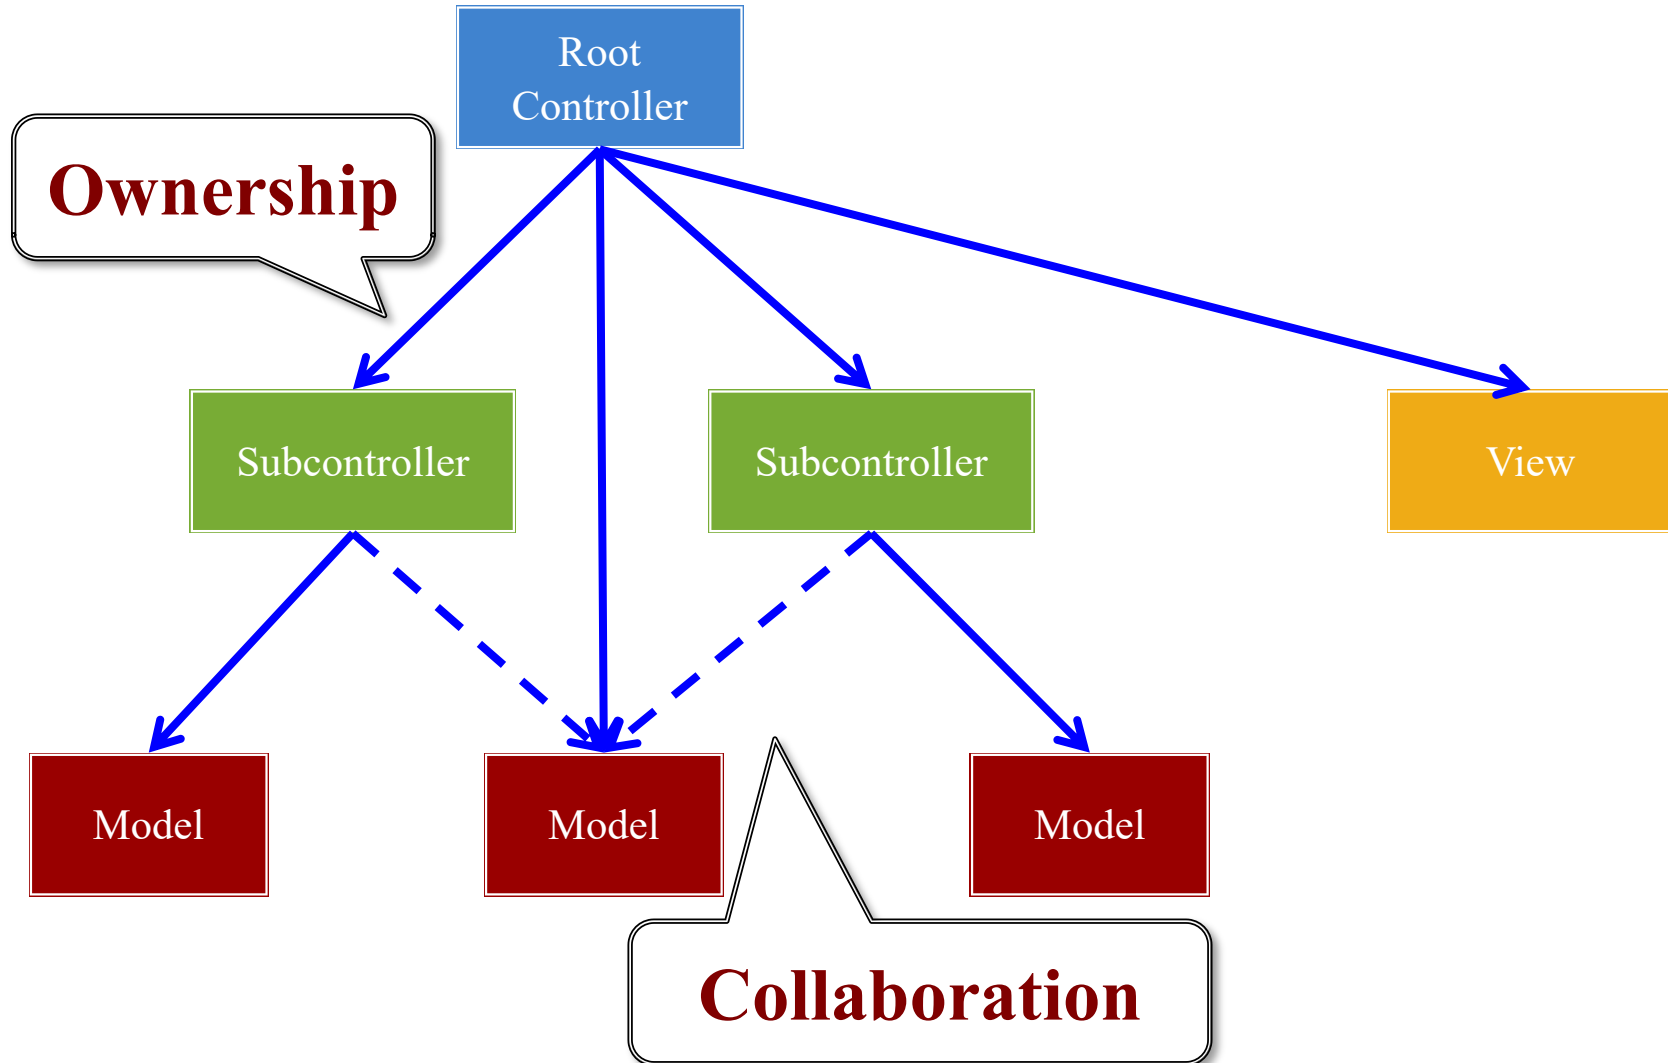


# Application Structure

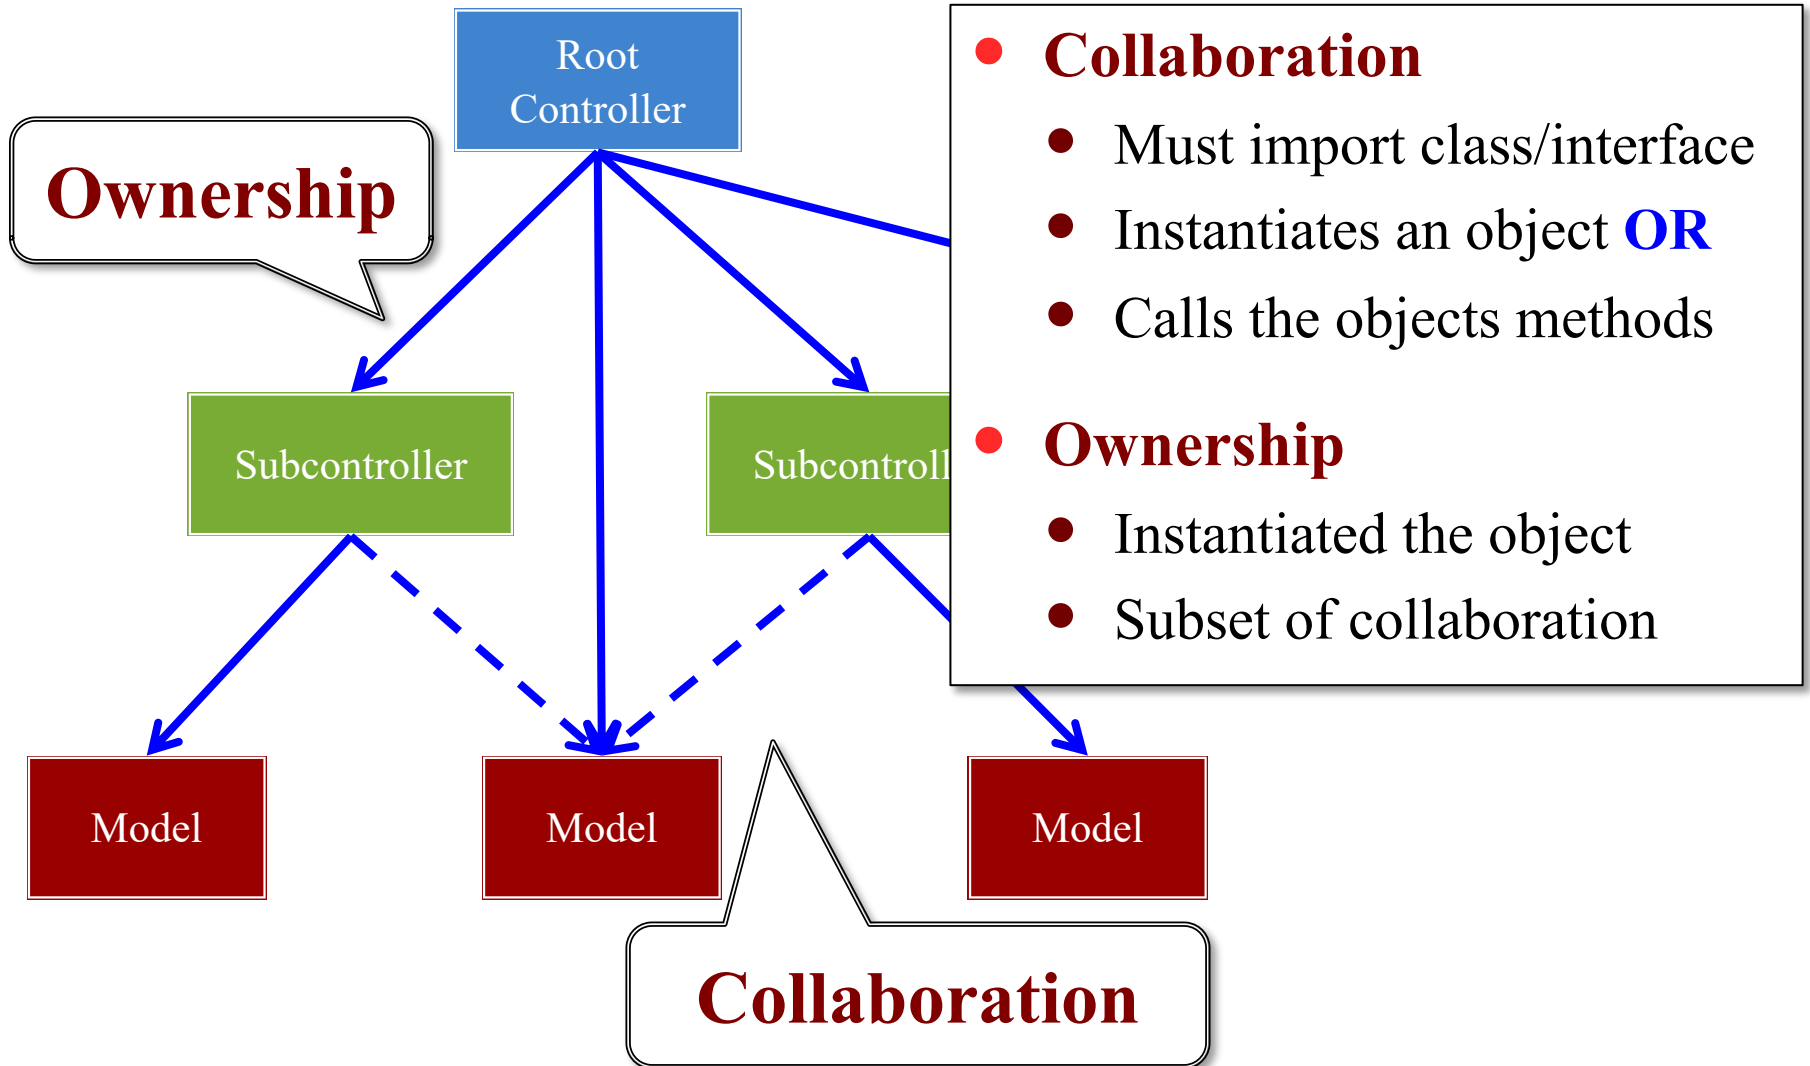


# Following the Information Flow

---

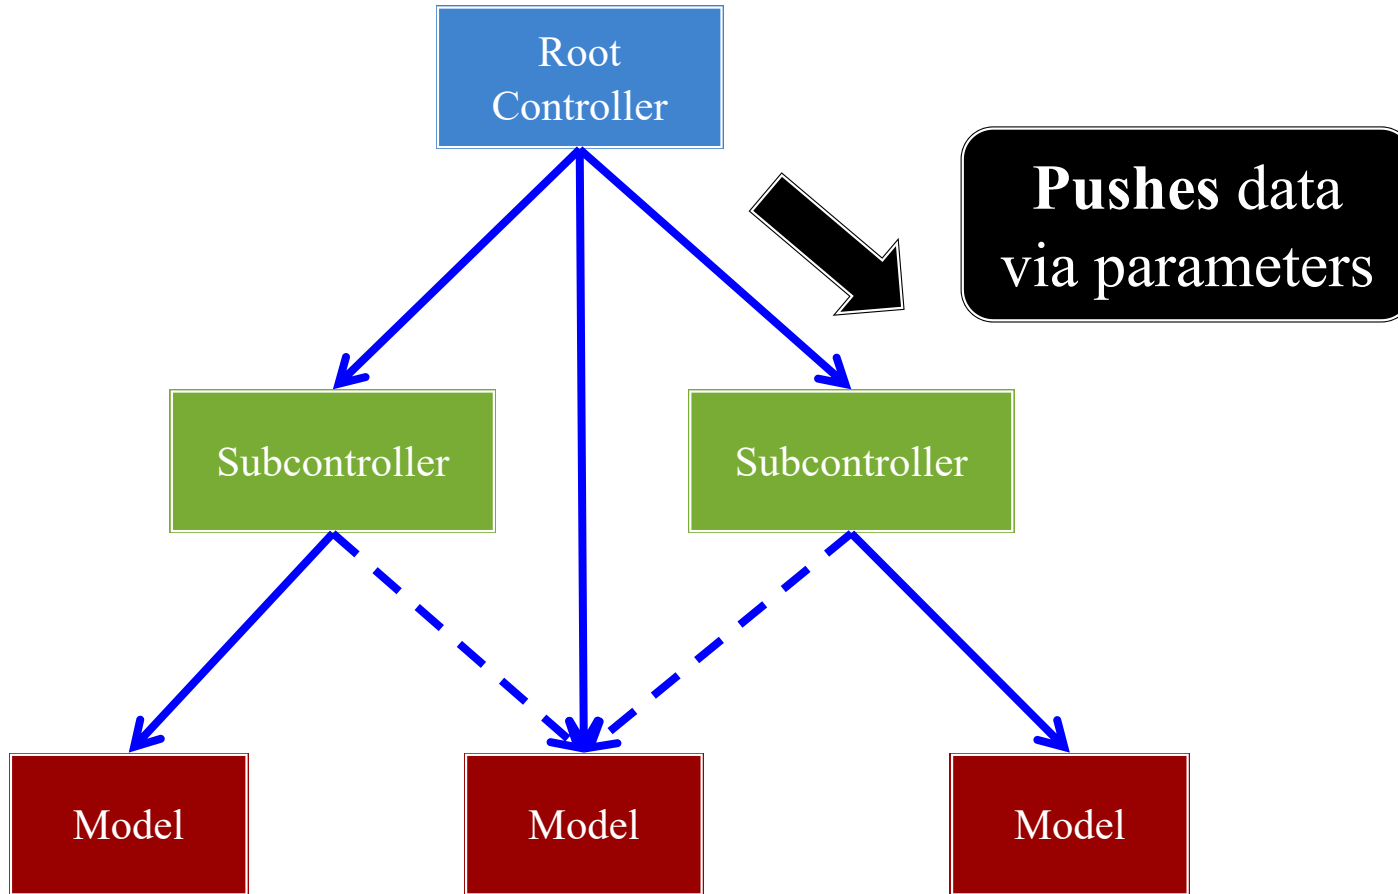


# Following the Information Flow

---


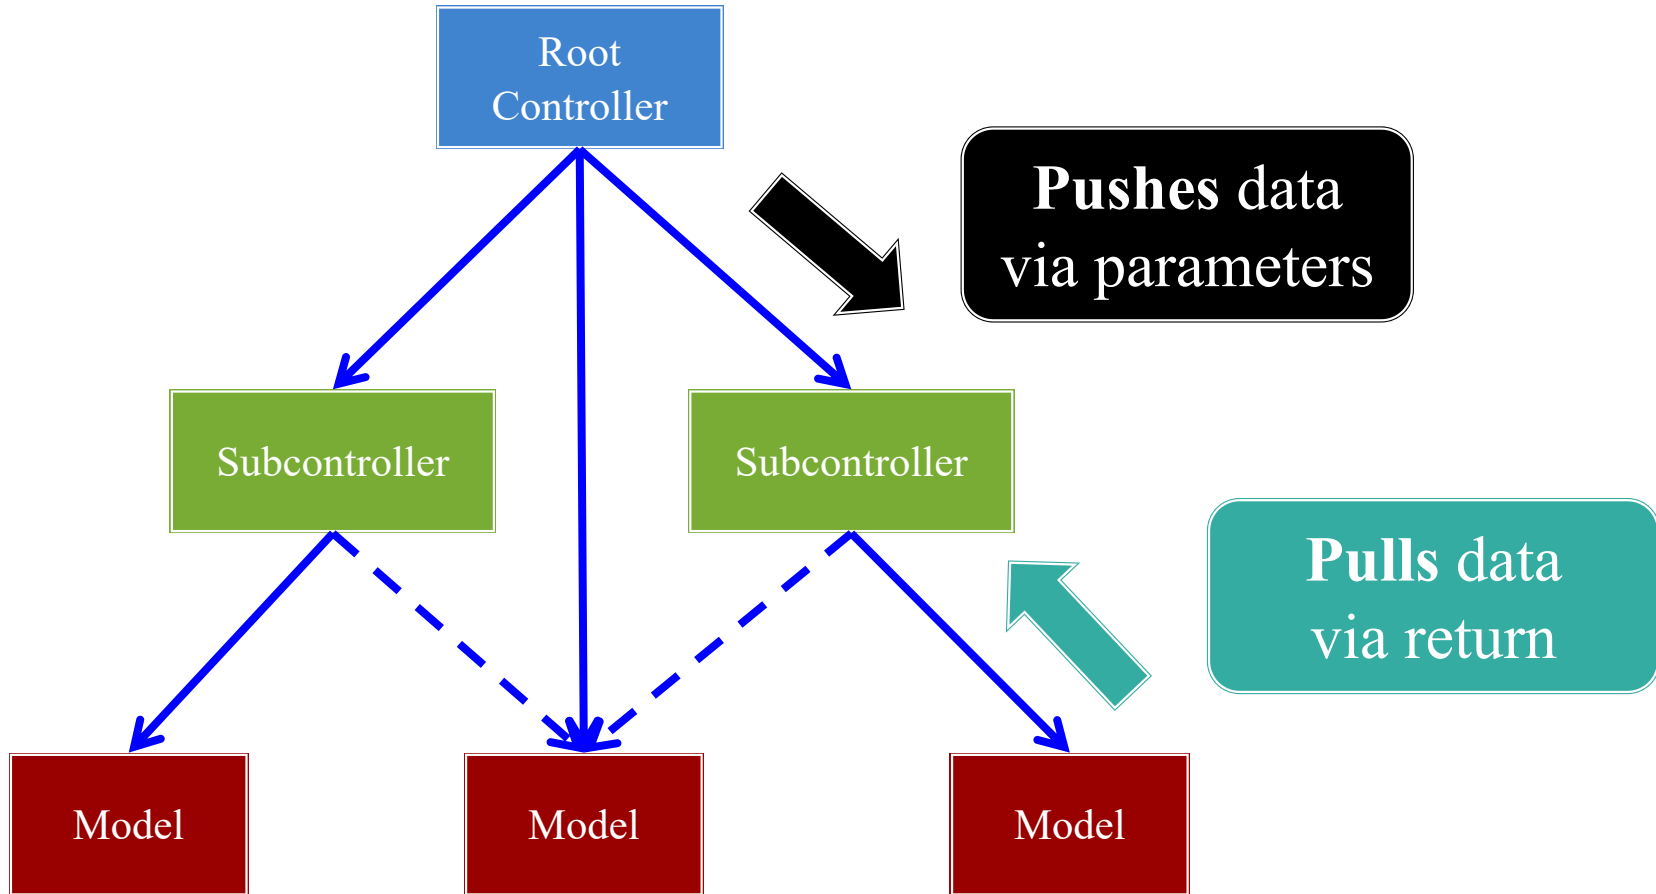


# Following the Information Flow

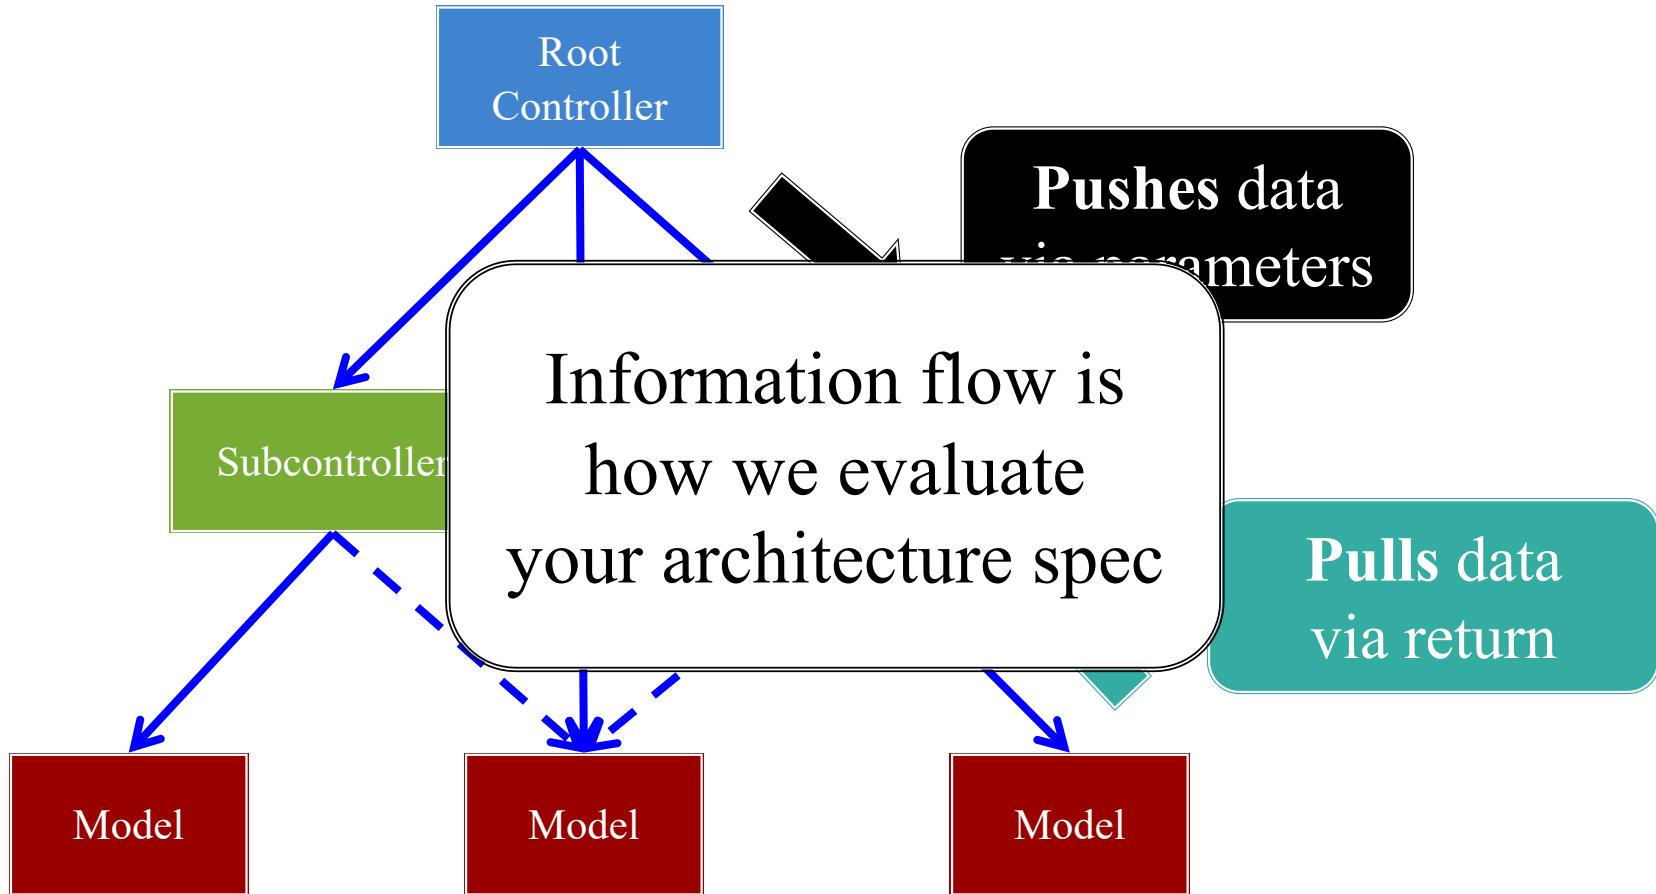


# Avoid Cyclic Collaboration

---

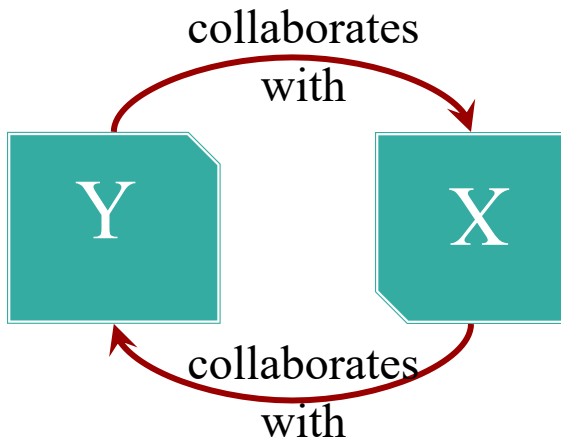

Controller

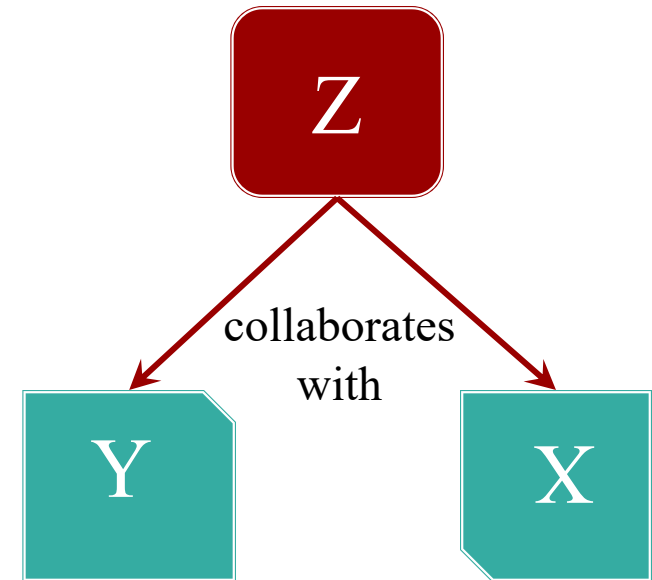




# Avoid Cyclic Collaboration


---

- **Example:** Lab 3
  - Ship fires projectiles
  - Must add to game state
- Originally all in model
  - Ship referenced game state
  - And game state stored ship
  - **Cyclic Reference**
- We added a new controller
  - It references game state
  - Only it adds to game state
  - **Cycle broken**

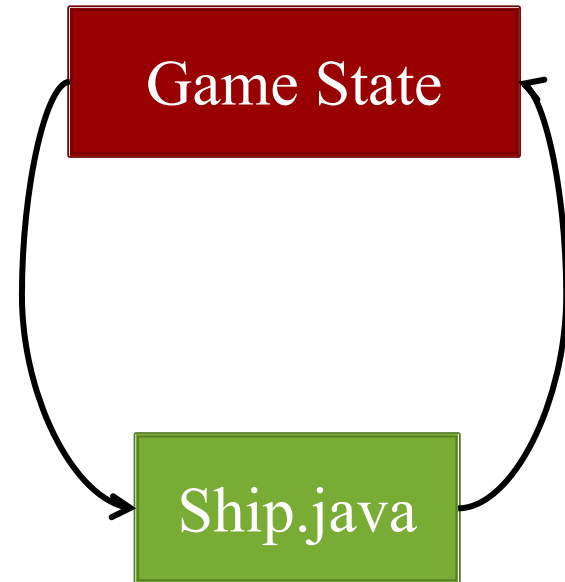


# Avoid Cyclic Collaboration

- **Example:** Lab 3
  - Ship fires projectiles
  - Must add to game state
- Originally all in model
  - Ship referenced game state
  - And game state stored ship
  - **Cyclic Reference**
- We added a new controller
  - It references game state
  - Only it adds to game state
  - **Cycle broken**

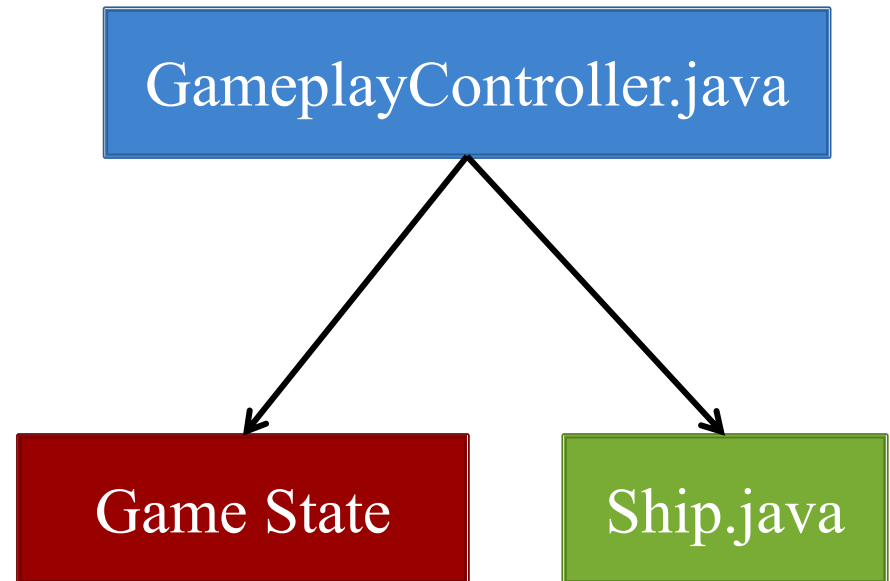


# Alternative: Interfaces

- Relationships are for APIs
  - Implementation not relevant
  - Can be class or interface
- Interfaces can break cycles
  - Start with single class
  - Break into many interfaces
  - Refer to interface, not class
- Needed if actions in model
  - Abstracts game state
  - Hides all but relevant data

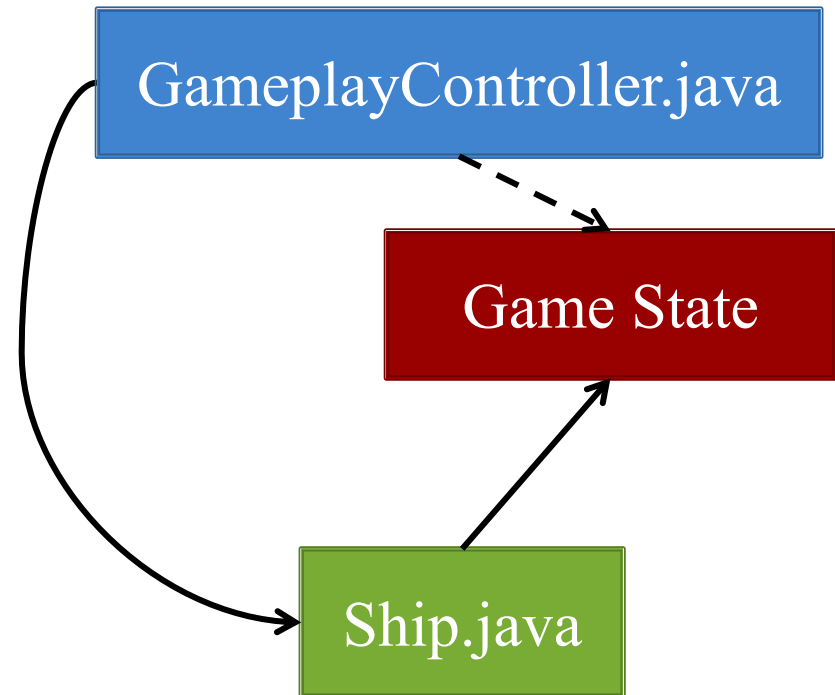

# Architecture: The Big Picture

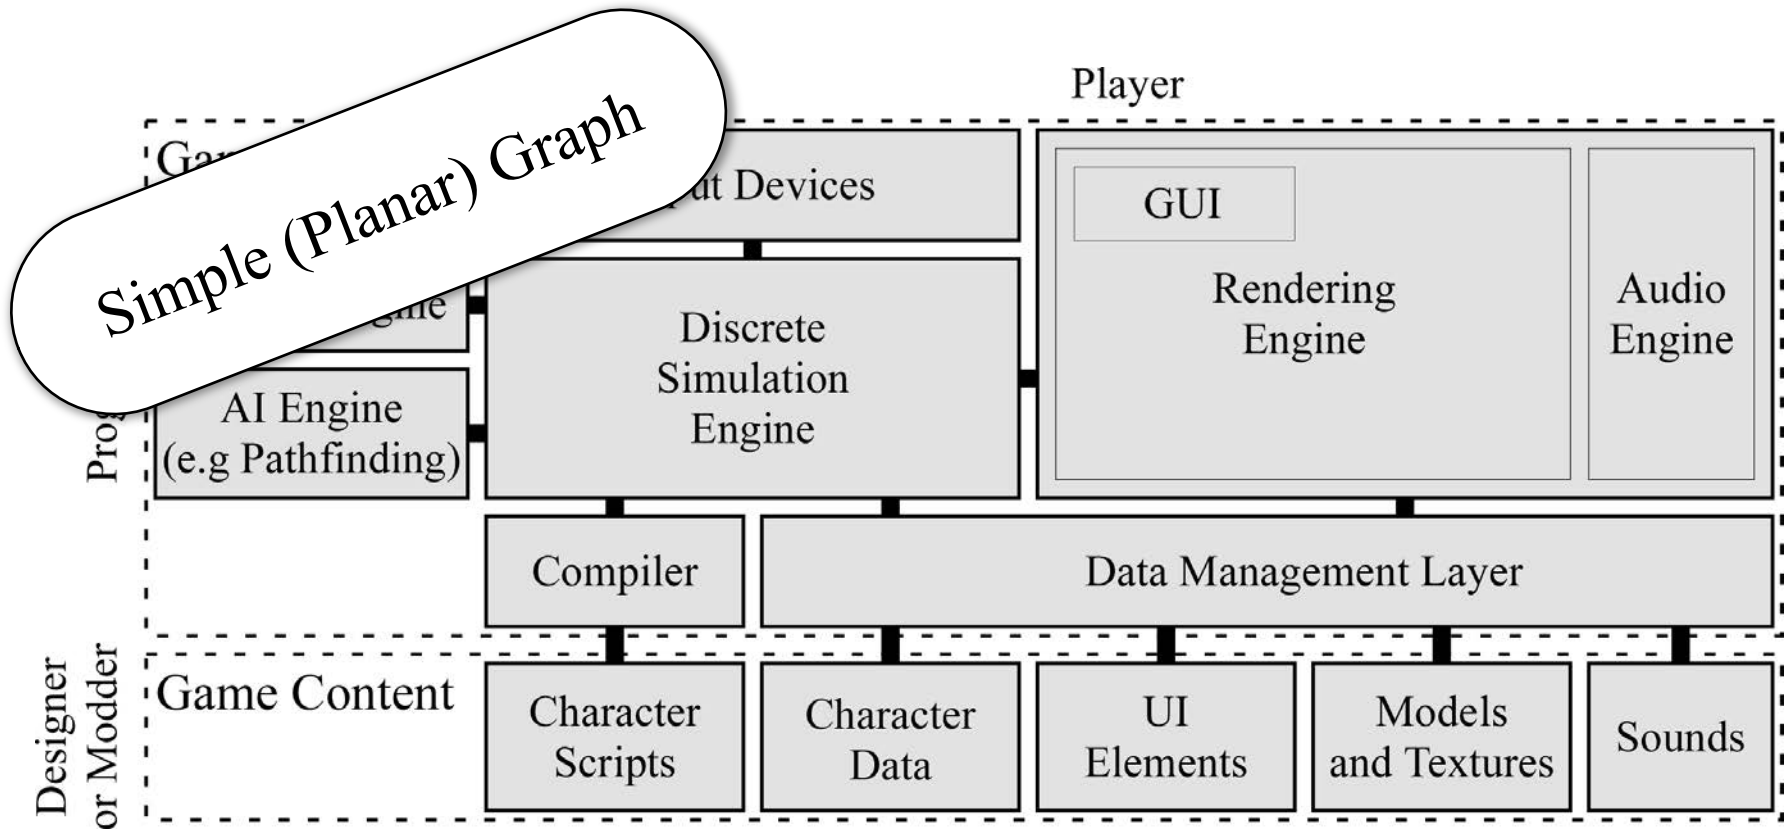

# CRC Index Card Exercise

Try to make collaborators adjacent

| Class 1        |               |
|----------------|---------------|
| Responsibility | Collaboration |
| ...            | Class 2       |
| ...            | Class 3       |
| ...            | Class 4       |

| Class 2        |               |
|----------------|---------------|
| Responsibility | Collaboration |
| ...            | ...           |
| ...            | ...           |
| ...            | ...           |

| Class 3        |               |
|----------------|---------------|
| Responsibility | Collaboration |
| ...            | ...           |
| ...            | ...           |
| ...            | ...           |

| Class 4        |               |
|----------------|---------------|
| Responsibility | Collaboration |
| ...            | ...           |
| ...            | ...           |
| ...            | ...           |

If cannot do this, time to think about nesting!

# Designing Class APIs

---

- Make classes formal
- Turn responsibilities into methods
- Turn collaboration into parameters

| <b>Scene Model</b>         |   |
|----------------------------|---|
| <b>Responsibility</b>      | <b>Method</b>   |
| Enumerates game objects    | <code>Iterator&lt;GameObject&gt; enumObjects()</code> |
| Adds game objects to scene | <code>void addObject(GameObject)</code>               |
| Removes objects from scene | <code>void removeObject(GameObject)</code>            |
| Selects object at mouse    | <code>GameObject getObject(MouseEvent)</code>         |

# Documenting APIs

---

- Use a formal **documentation style**
  - What **parameters** the method takes
  - What values the method **returns**
  - What the method does (**side effects**)
  - How method responds to errors (**exceptions**)
- Make use of **documentation comments**
  - **Example**: JavaDoc in Java
  - Has become defacto-standard (even used in C++)

# Documenting API

---

```
/**
 * Returns an Image object that can then be painted on the screen.
 * <p>
 * The url argument must specify an absolute {@link URL}. The name argument is a specifier that
 * is relative to the url argument.
 * <p>
 * This method always returns immediately, whether or not the image exists. When this applet
 * attempts to draw the image on the screen, the data will be loaded. The graphics primitives that
 * draw the image will incrementally paint on the screen.
 *
 * @param url an absolute URL giving the base location of the image
 * @param name the location of image, relative to the url argument
 * @return the image at the specified URL
 * @see Image
 */
public Image getImage(URL url, String name) {
    try {
        return getImage(new URL(url, name));
    } catch (MalformedURLException e) { return null; } }
}
```



# Taking This Idea Further

---

- **UML**: Unified Modeling Language
  - Often used to specify class relationships
  - But expanded to model other things
  - **Examples**: data flow, human users
- How useful is it?
  - Extremely useful for documentation
  - Less useful for design (e.g. before implementation)
  - A language to program in another language




# Activity Diagrams

---

- Define the **workflow** of your program
  - Very similar to a standard flowchart
  - Can follow simultaneous paths (threads)
- Are an *component* of **UML**
  - But did not originate with UML
  - Mostly derived from **Petri Nets**
  - One of most useful UML *design* tools
- Activity diagrams are only UML we use



# Activity Diagram Example

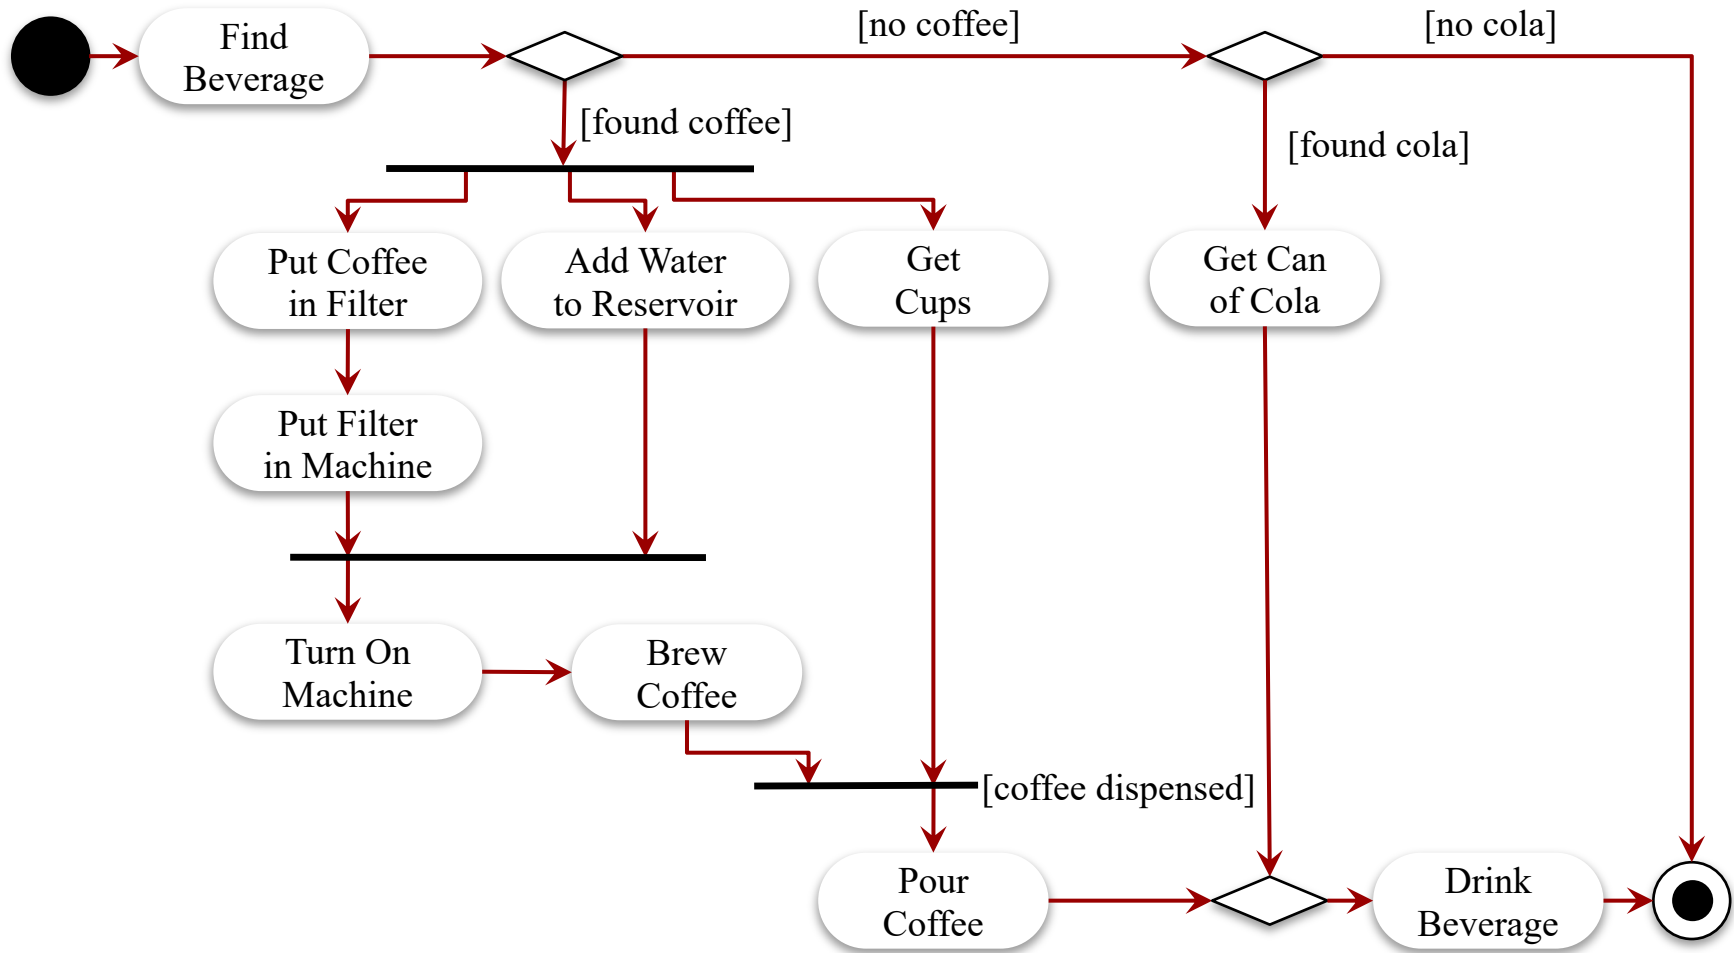

# Activity Diagram Components

- **Synchronization Bars**


- **In:** Wait until have happened
- **Out:** Actions “simultaneous”
- ... or order does not matter

- **Decision Points**


- **In:** Only needs one input
- **Out:** Only needs one output

- **Guards**

- When we can follow edge
- \* is iteration over *container*

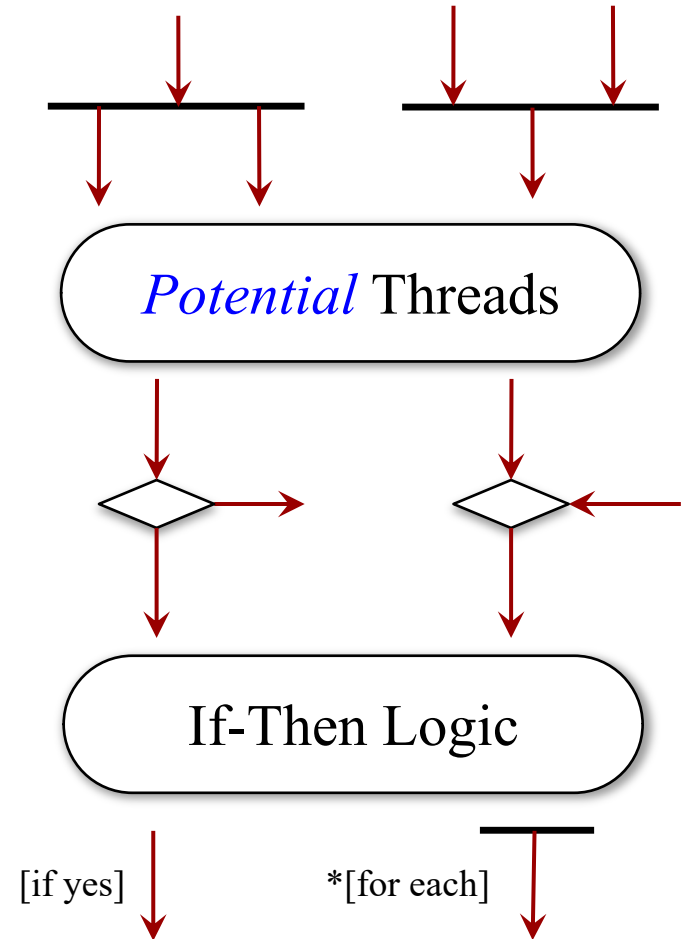


# Activity Diagram Example

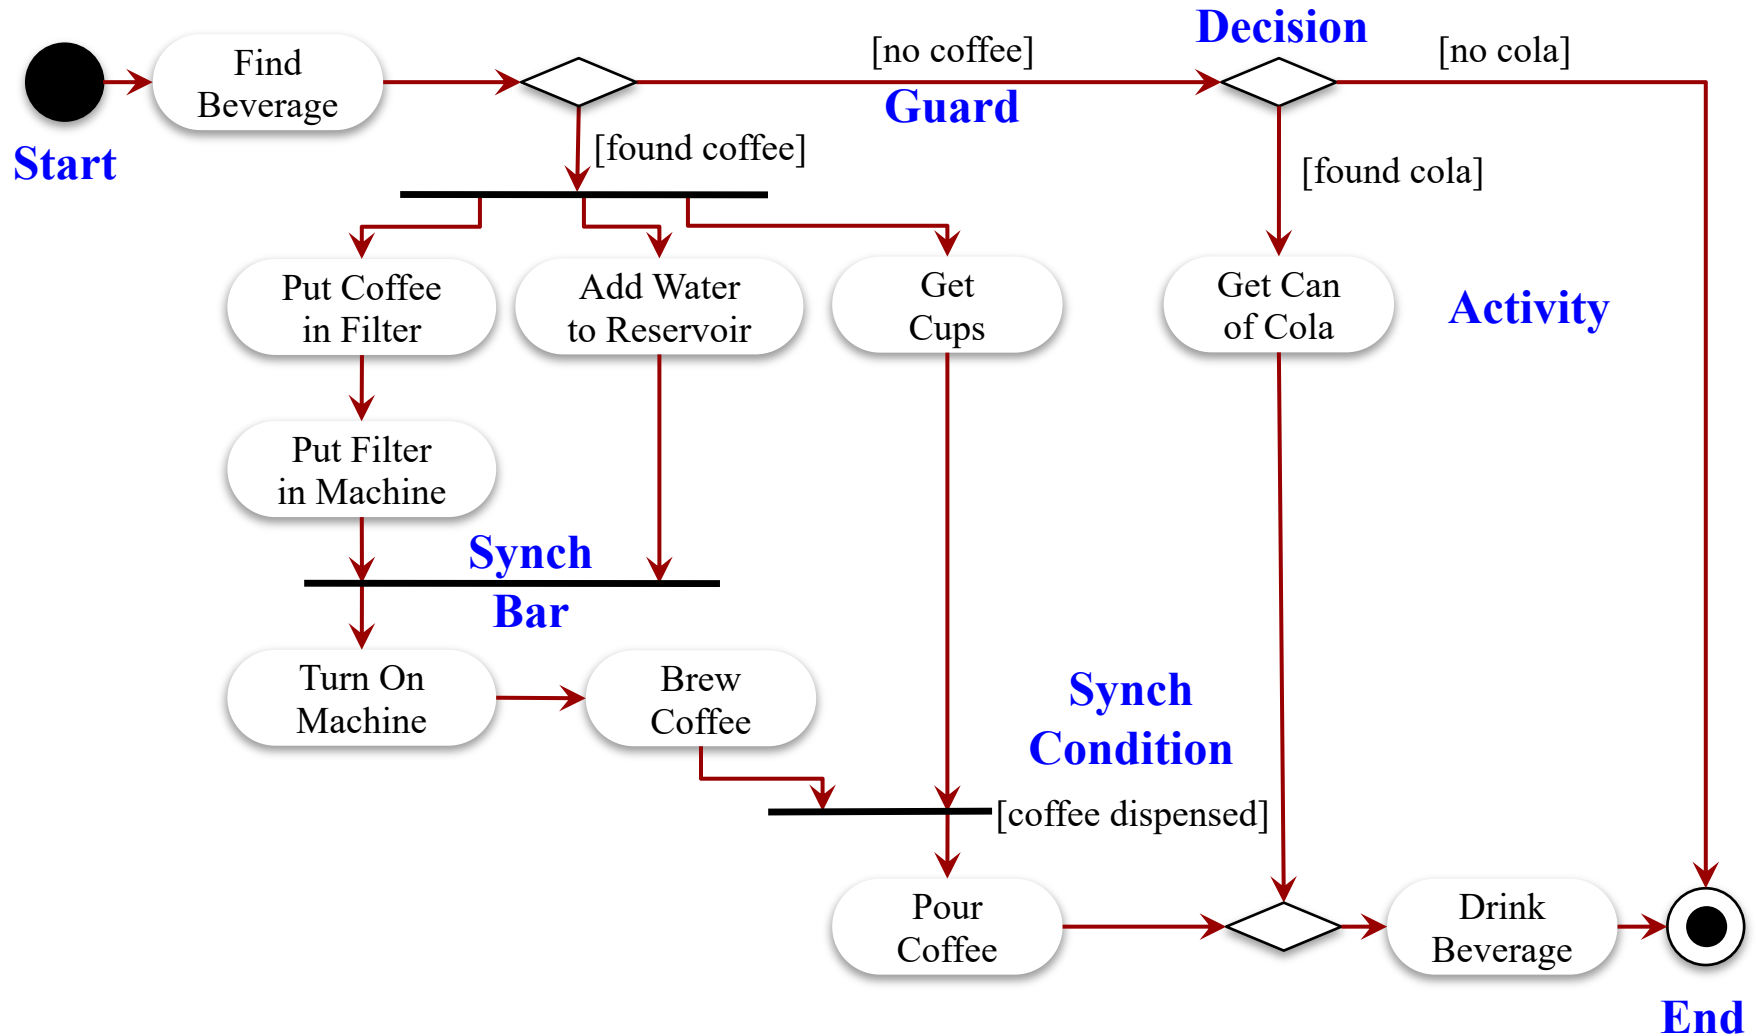




# Asynchronous Pathfinding

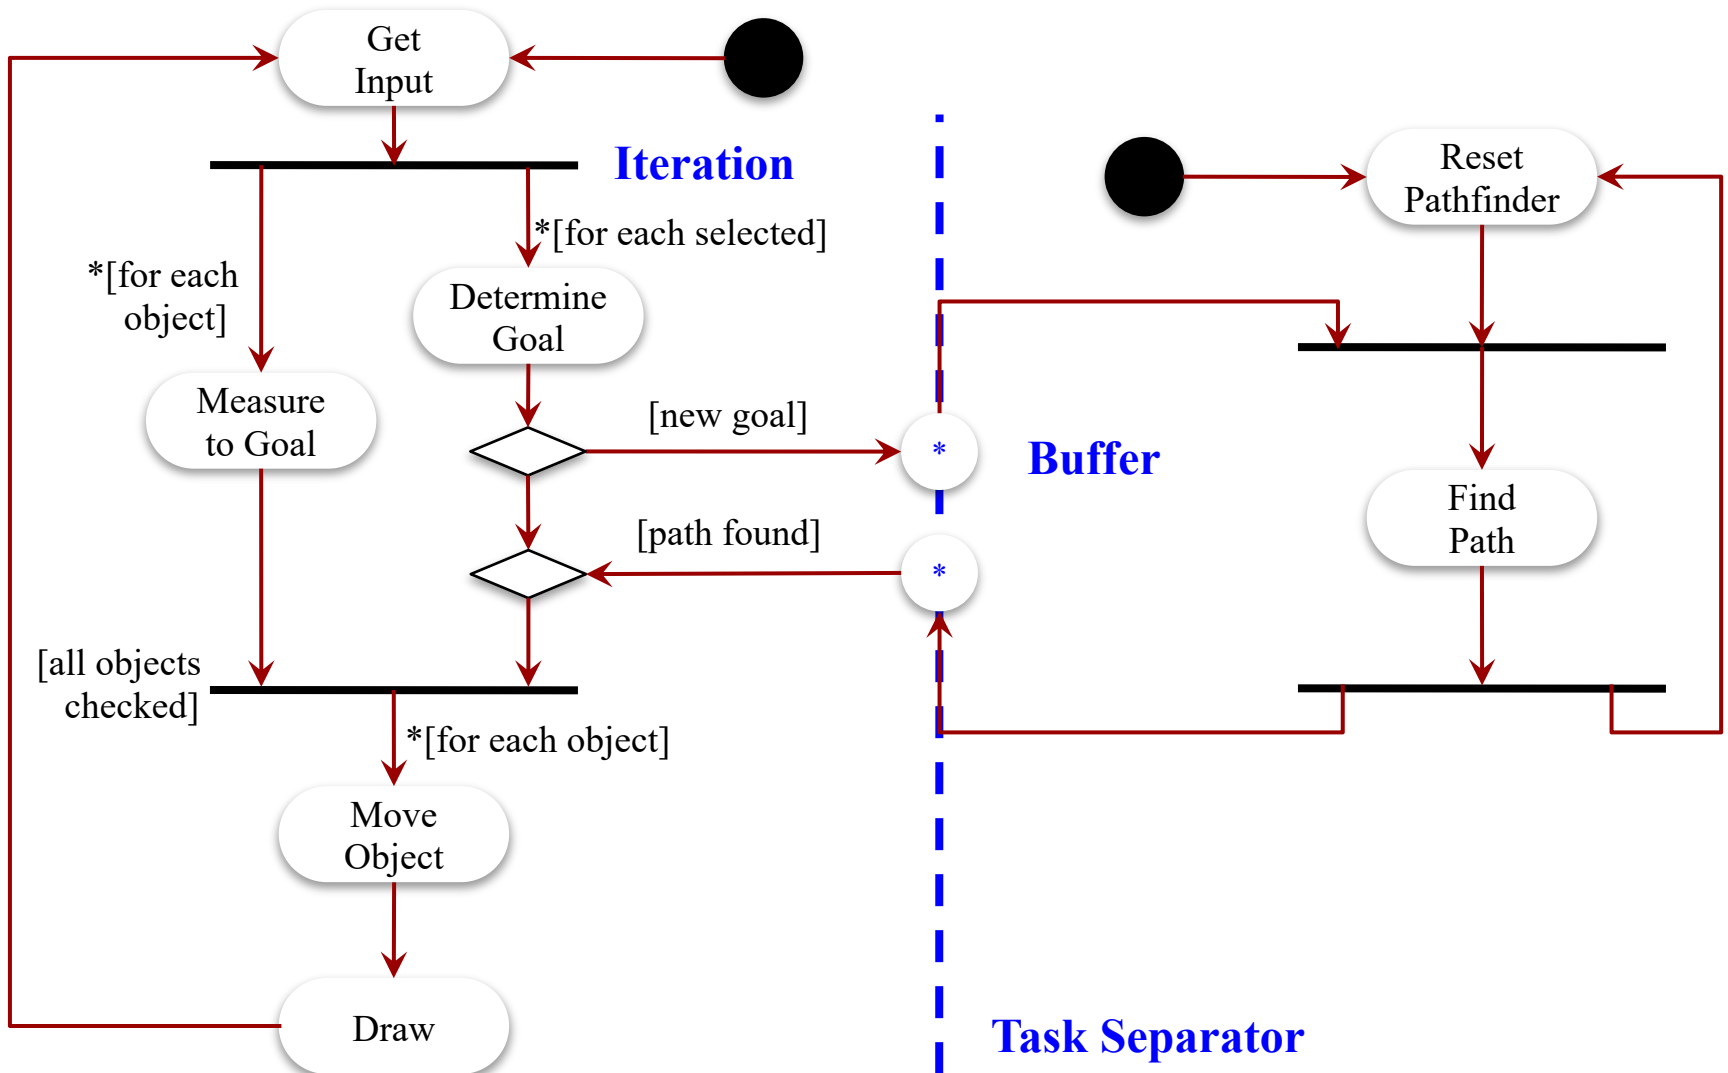


# Asynchronous Pathfinding

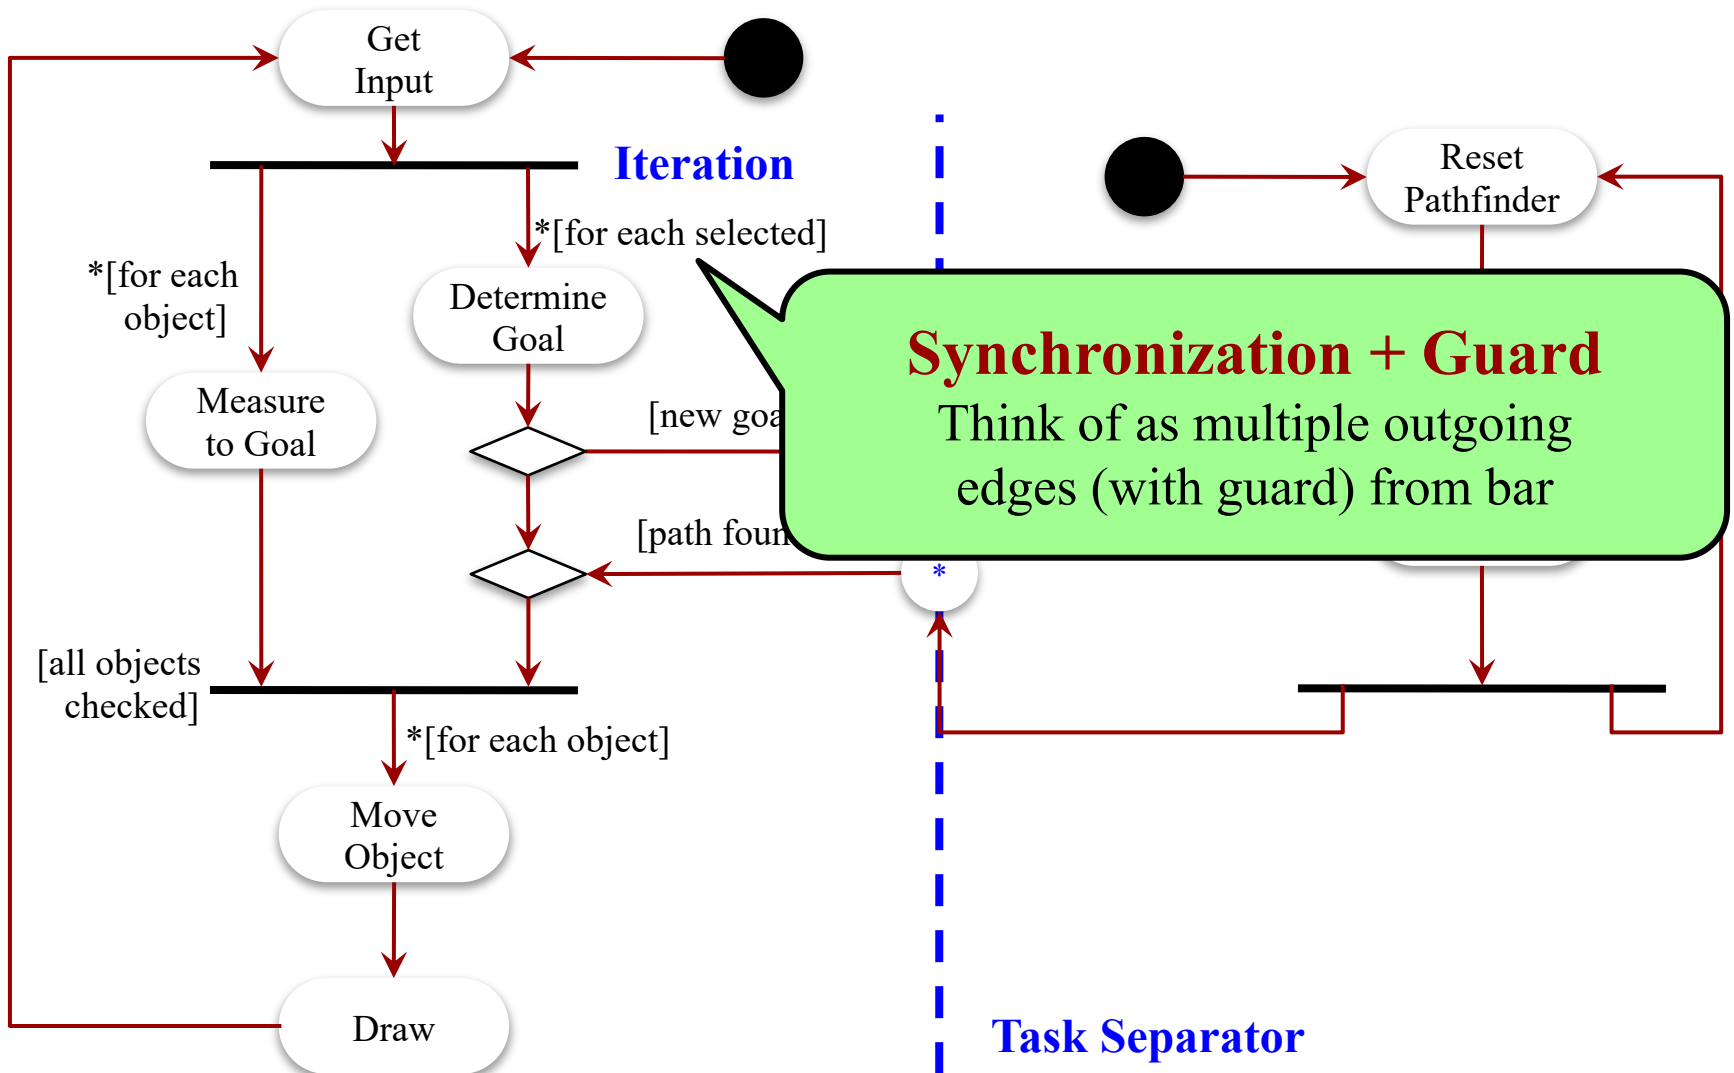




# Expanding Level of Detail

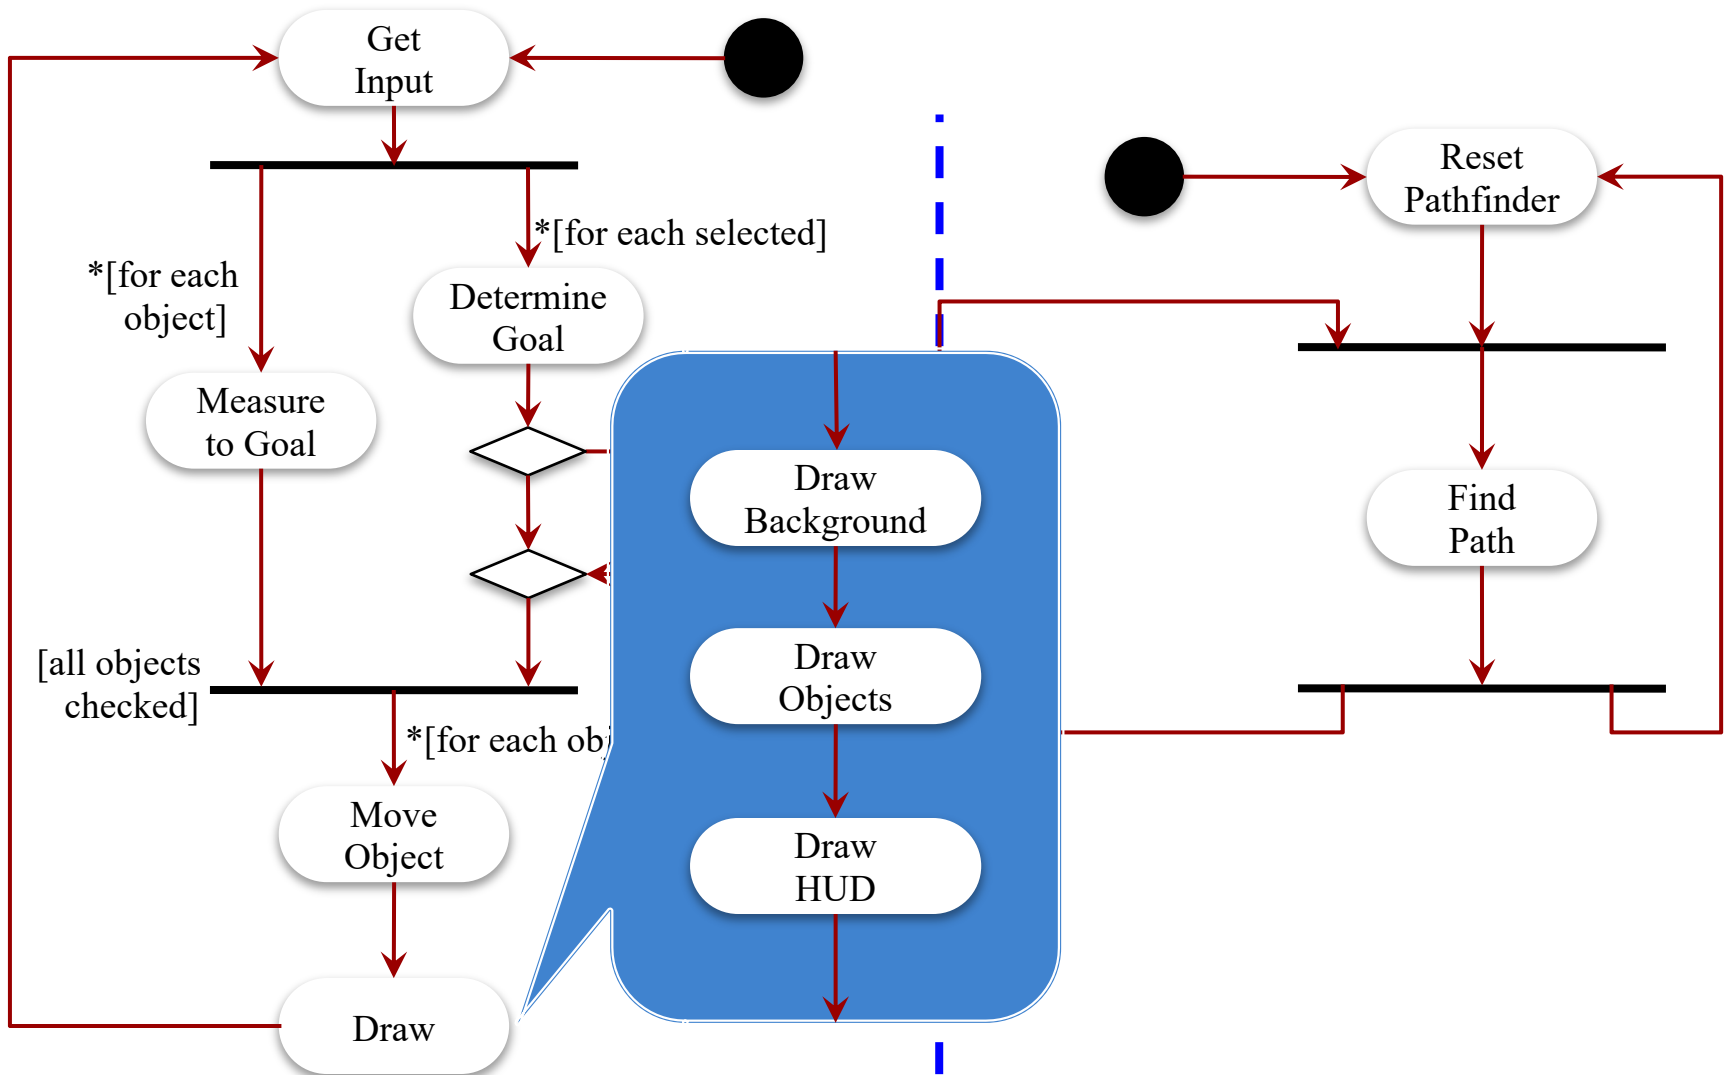

# Using Activity Diagrams

---

- Good way to identify major subsystems
  - Each action is a **responsibility**
  - Need extra responsibility; create it in CRC
  - Responsibility not there; remove from CRC
- Do activity diagram first?
  - Another iterative process
  - Keep level of detail simple
  - Want outline, not software program

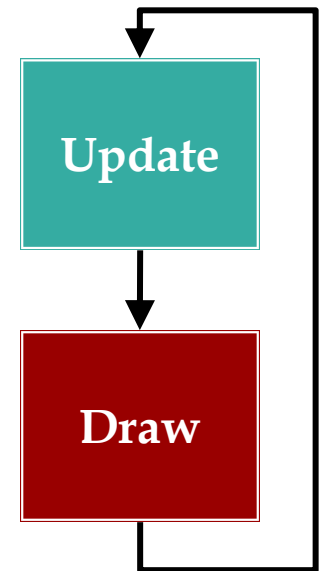

# Architecture Design

---

- Identify major subsystems in **CRC cards**
  - List responsibilities
  - List collaborating subsystems
- Draw **activity diagram**
  - Make sure agrees with CRC cards
  - Revise CRC cards if not
- Create **class API** from CRC cards
  - Recall intro CS courses: *specifications first!*
  - But **not** actually part of specification document

# Programming Contract

---

- Once create API, it is a **contract**
  - Promise to team that “works this way”
  - Can change **implementation**, but not **interface**
- If change the interface, must **refactor**
  - Restructure architecture to support interface
  - May change the CRCs and activity diagram
  - Need to change any written code

# Summary

---

- Architecture design starts at a high level
  - **Class-responsibilities-collaboration**
  - Layout as cards to visualize dependencies
- **Activity diagrams** useful for update loop
  - Outline general flow of activity
  - Identifies *dependencies* in the process
- Must formalize **class APIs**
  - No different from standard Java documentation
  - Creates a **contract** for team members

# Where to From Here?

---

- Later lessons fill in architecture details
  - **Data-Driven Design**: Data Management
  - **2D Graphics**: Drawing
  - **Physics Engines**: Collisions, Forces
  - **Character AI**: Sense-Think-Act cycle
  - **Strategic AI**: Asynchronous AI
  - **Networking** (at end of course)
- But there is more design coming too