

Virtual Memory 2

Hakim Weatherspoon

CS 3410, Spring 2013

Computer Science

Cornell University

Goals for Today

Virtual Memory

- Address Translation
 - Pages, page tables, and memory mgmt unit
- Paging
- Role of Operating System
 - Context switches, working set, shared memory
- Performance
 - How slow is it
 - Making virtual memory fast
 - Translation lookaside buffer (TLB)
- Virtual Memory Meets Caching

Role of the Operating System
Context switches, working set,
shared memory

Role of the Operating System

The operating systems (OS) manages and multiplexes memory between process. It...

- Enables processes to (explicitly) increase memory: sbrk and (implicitly) decrease memory
- Enables sharing of physical memory: multiplexing memory via context switching, sharing memory, and paging
- Enables and limits the number of processes that can run simultaneously

sbrk

Suppose Firefox needs a new page of memory

(1) Invoke the Operating System

```
void *sbrk(int nbytes);
```

(2) OS finds a free page of physical memory

- clear the page (fill with zeros)
- add a new entry to Firefox's PageTable

Context Switch

Suppose Firefox is idle, but Skype wants to run

(1) Firefox invokes the Operating System

```
int sleep(int nseconds);
```

(2) OS saves Firefox's registers, load skype's

- (more on this later)

(3) OS changes the CPU's Page Table Base Register

- Cop0:ContextRegister / CR3:PDBR

(4) OS returns to Skype

Shared Memory

Suppose Firefox and Skype want to share data

(1) OS finds a free page of physical memory

- clear the page (fill with zeros)
- add a new entry to Firefox's PageTable
- add a new entry to Skype's PageTable
 - can be same or different vaddr
 - can be same or different page permissions

Multiplexing

Suppose Skype needs a new page of memory, but Firefox is hogging it all

(1) Invoke the Operating System

```
void *sbrk(int nbytes);
```

(2) OS can't find a free page of physical memory

- Pick a page from Firefox instead (or other process)

(3) If page table entry has dirty bit set...

- Copy the page contents to disk

(4) Mark Firefox's page table entry as "on disk"

- Firefox will fault if it tries to access the page


(5) Give the newly freed physical page to Skype

- clear the page (fill with zeros)
- add a new entry to Skype's PageTable


Paging Assumption 1

~~OS multiplexes physical memory among processes~~

- assumption # 1:
processes use only a few pages at a time
- working set = set of process's recently actively pages

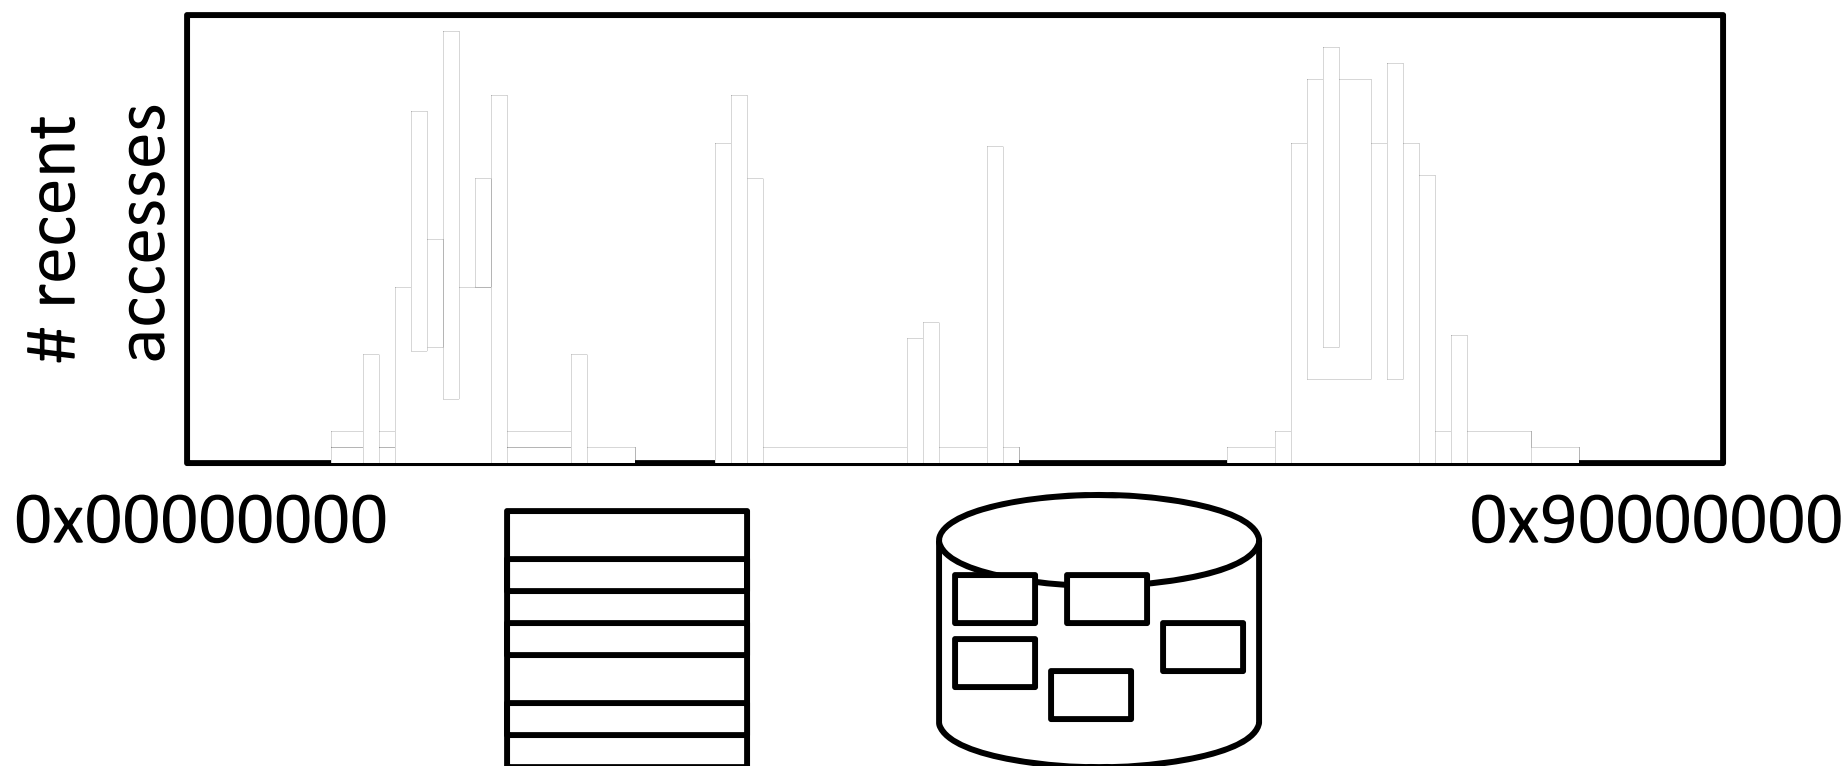


Thrashing (excessive paging)

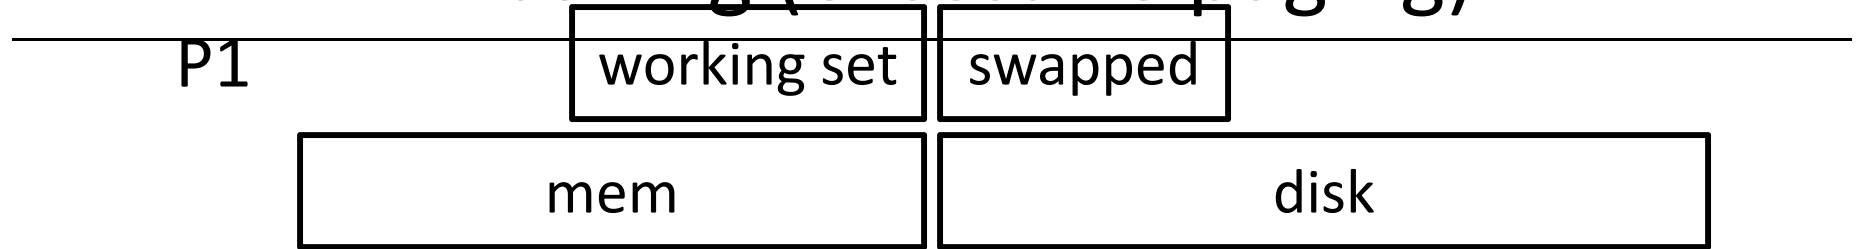


Q: What if working set is too large?

Case 1: Single process using too many pages

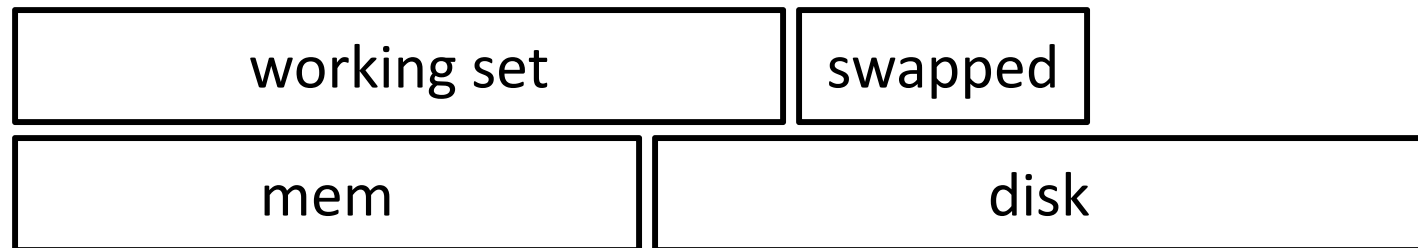

Case 2: Too many processes

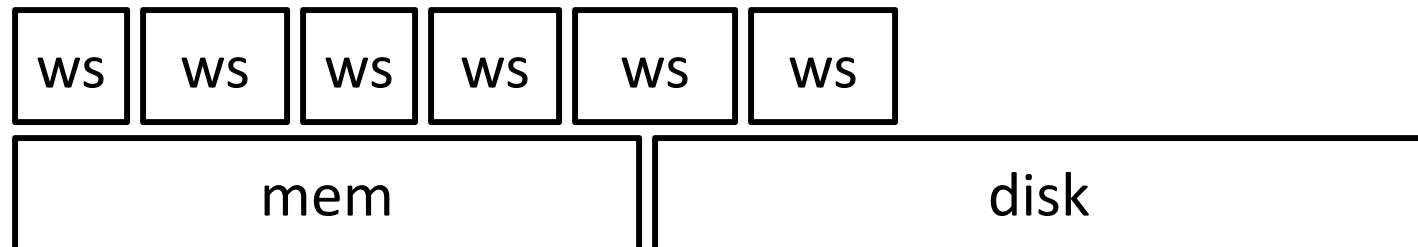

Thrashing

Thrashing b/c working set of process (or processes) greater than physical memory available

- Firefox steals page from Skype
- Skype steals page from Firefox
- I/O (disk activity) at 100% utilization
 - But no useful work is getting done


Ideal: Size of disk, speed of memory (or cache)

Non-ideal: Speed of disk

Paging Assumption 2


OS multiplexes physical memory among processes

- assumption # 2:
recent accesses predict future accesses
- working set usually changes slowly over time

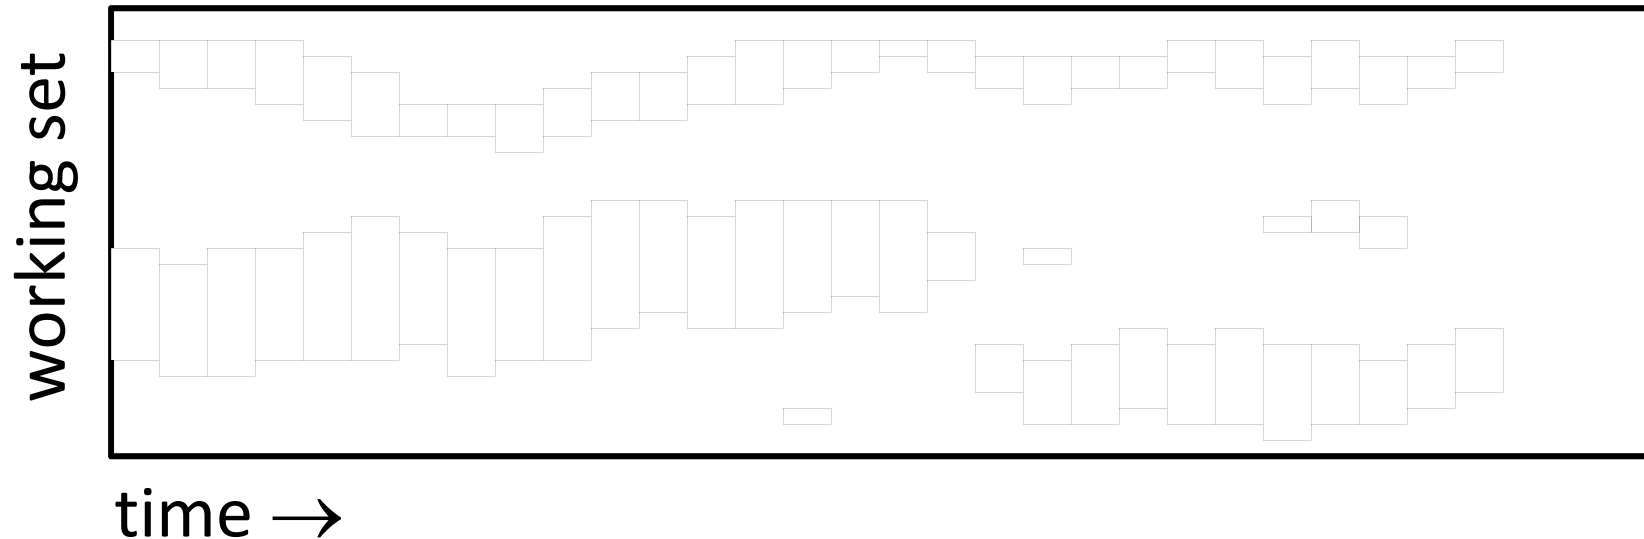

More Thrashing

Q: What if working set changes rapidly or unpredictably?

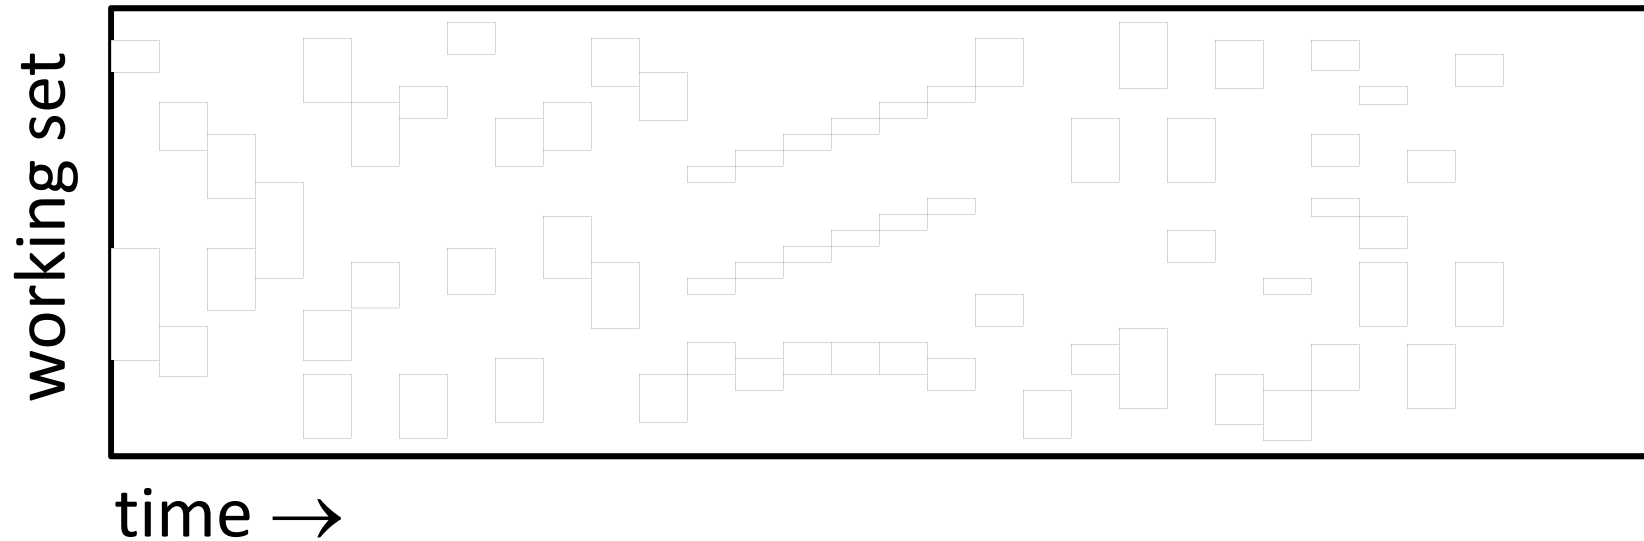

A: Thrashing b/c recent accesses don't predict future accesses

Preventing Thrashing

How to prevent thrashing?

- User: Don't run too many apps
- Process: efficient and predictable mem usage
- OS: Don't over-commit memory, memory-aware scheduling policies, etc.

Performance

Performance

Virtual Memory Summary

PageTable for each process:

- 4MB contiguous in physical memory, or multi-level, ...
- every load/store translated to physical addresses
- page table miss = *page fault*
load the swapped-out page and retry instruction,
or kill program if the page really doesn't exist,
or tell the program it made a mistake

Page Table Review

~~x86 Example: 2 level page tables, assume...~~

32 bit vaddr, 32 bit paddr

4k PDir, 4k PTables, 4k Pages

PTBR

PDE
PDE
PDE
PDE

PTE
PTE
PTE
PTE

Q: How many bits for a physical page number?

A: 20

Q: What is stored in each PageTableEntry?

A: ppn, valid/dirty/r/w/x/...

Q: What is stored in each PageDirEntry?

A: ppn, valid/?/...

Q: How many entries in a PageDirectory?

A: 1024 four-byte PDEs

Q: How many entries in each PageTable?

A: 1024 four-byte PTEs

Page Table Example

~~x86 Example: 2 level page tables, assume...~~

32 bit vaddr, 32 bit paddr

4k PDir, 4k PTables, 4k Pages

PTBR = 0x10005000 (physical)

PTBR

PDE
PDE
PDE
PDE

PTE
PTE
PTE
PTE

Write to virtual address 0x7192a44c...

Q: Byte offset in page?

PT Index?

PD Index?

(1) PageDir is at 0x10005000, so...

Fetch PDE from physical address $0x10005000 + (4 * PDI)$

- suppose we get {0x12345, v=1, ...}

(2) PageTable is at 0x12345000, so...

Fetch PTE from physical address $0x12345000 + (4 * PTI)$

- suppose we get {0x14817, v=1, d=0, r=1, w=1, x=0, ...}

(3) Page is at 0x14817000, so...

Write data to physical address? 0x1481744c

Also: update PTE with d=1

Performance

Virtual Memory Summary

PageTable for each process:

- 4MB contiguous in physical memory, or multi-level, ...
- every load/store translated to physical addresses
- page table miss: load a swapped-out page and retry instruction, or kill program

Performance?

- terrible: memory is already slow
translation makes it slower

Solution?

- A cache, of course

Making Virtual Memory Fast

The Translation Lookaside Buffer (TLB)


Translation Lookaside Buffer (TLB)

Hardware Translation Lookaside Buffer (TLB)


A small, very fast cache of recent address mappings

- TLB hit: avoids PageTable lookup
- TLB miss: do PageTable lookup, cache result for later

TLB Diagram

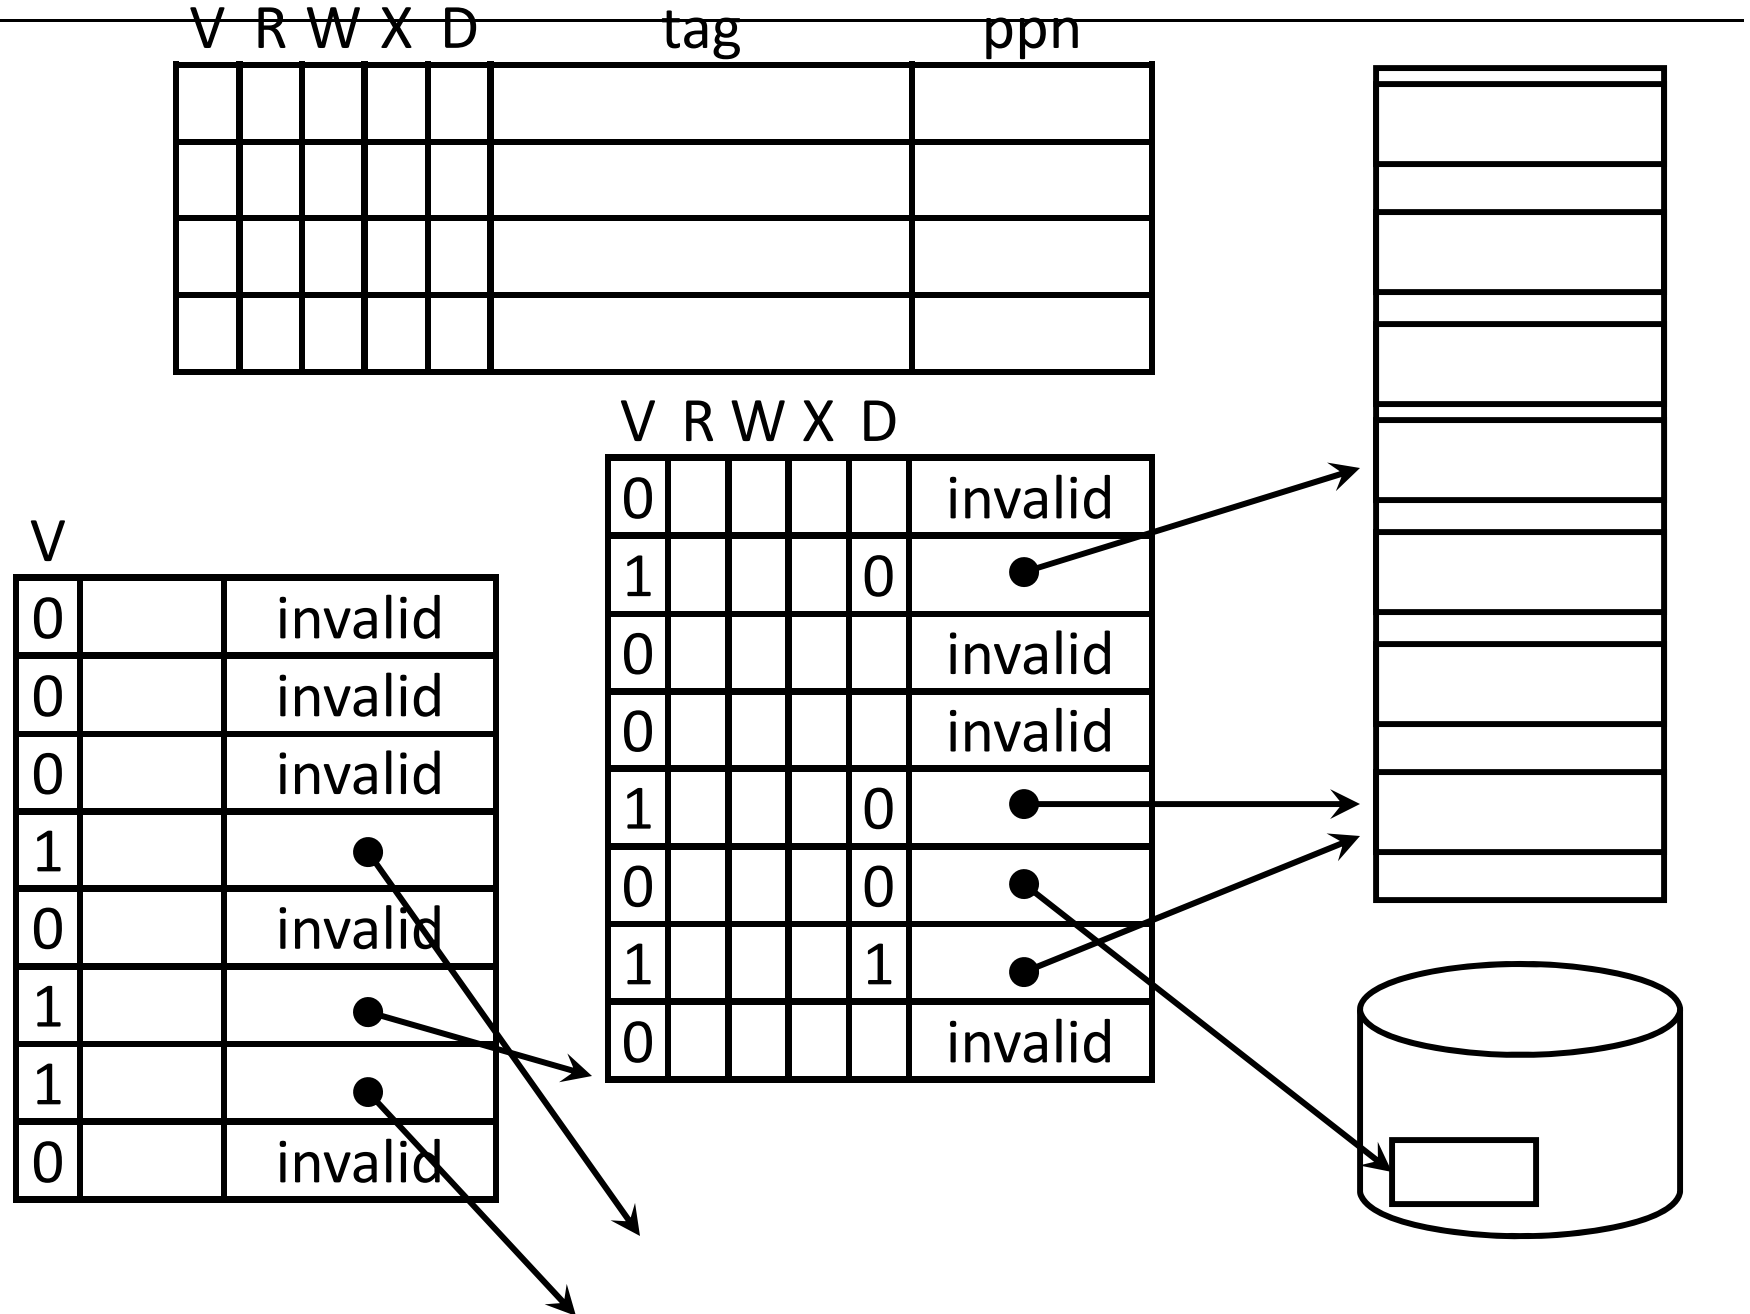

A TLB in the Memory Hierarchy

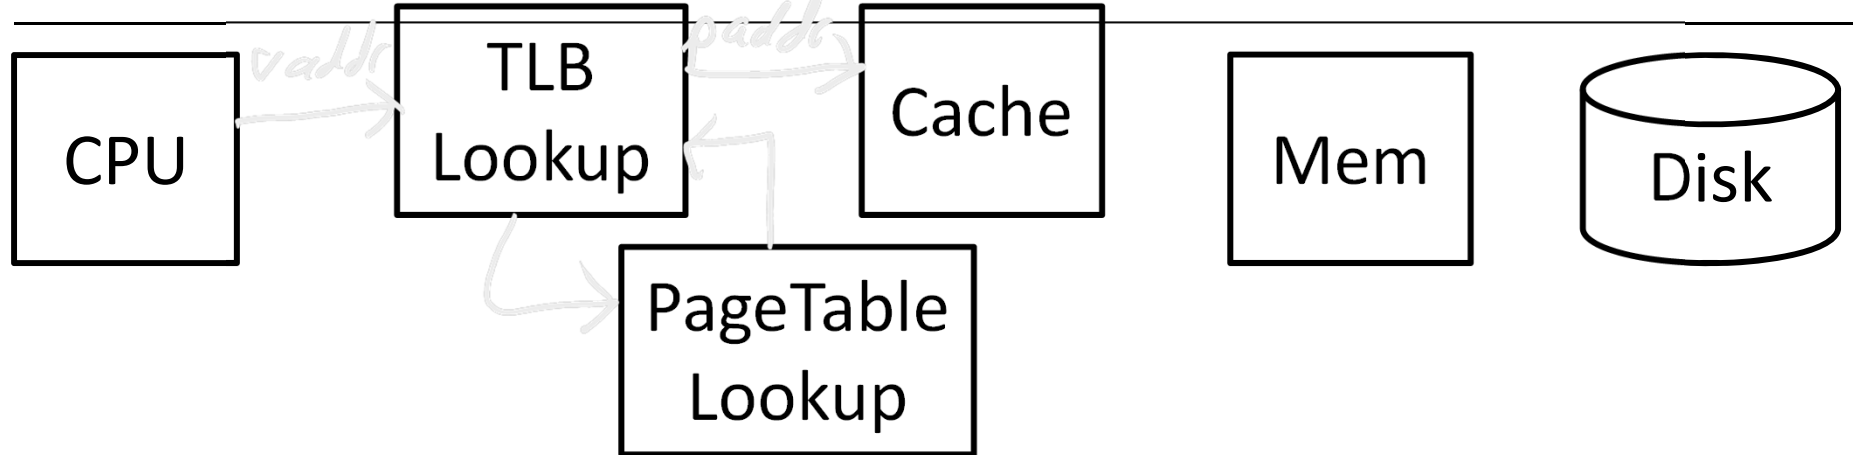

(1) Check TLB for vaddr (~ 1 cycle)

(2) TLB Hit

- compute paddr, send to cache

(2) TLB Miss: traverse PageTables for vaddr

(3a) PageTable has valid entry for in-memory page

- Load PageTable entry into TLB; try again (tens of cycles)

(3b) PageTable has entry for swapped-out (on-disk) page

- Page Fault: load from disk, fix PageTable, try again (millions of cycles)

(3c) PageTable has invalid entry

- Page Fault: kill process

TLB Coherency


TLB Coherency: What can go wrong?

A: PageTable or PageDir contents change

- swapping/paging activity, new shared pages, ...

A: Page Table Base Register changes

- context switch between processes



Translation Lookaside Buffers (TLBs)

When PTE changes, PDE changes, PTBR changes....

Full Transparency: TLB coherency in hardware

- Flush TLB whenever PTBR register changes
[easy – why?]
- Invalidate entries whenever PTE or PDE changes
[hard – why?]

TLB coherency in software

If TLB has a no-write policy...

- OS invalidates entry after OS modifies page tables
- OS flushes TLB whenever OS does context switch

TLB Parameters

TLB parameters (typical)

- very small (64 – 256 entries), so very fast
- fully associative, or at least set associative
- tiny block size: why?

Intel Nehalem TLB (example)

- 128-entry L1 Instruction TLB, 4-way LRU
- 64-entry L1 Data TLB, 4-way LRU
- 512-entry L2 Unified TLB, 4-way LRU

Virtual Memory meets Caching


Virtually vs. physically addressed caches

Virtually vs. physically tagged caches



Virtually Addressed Caching

~~Q: Can we remove the TLB from the critical path?~~

A: Virtually-Addressed Caches

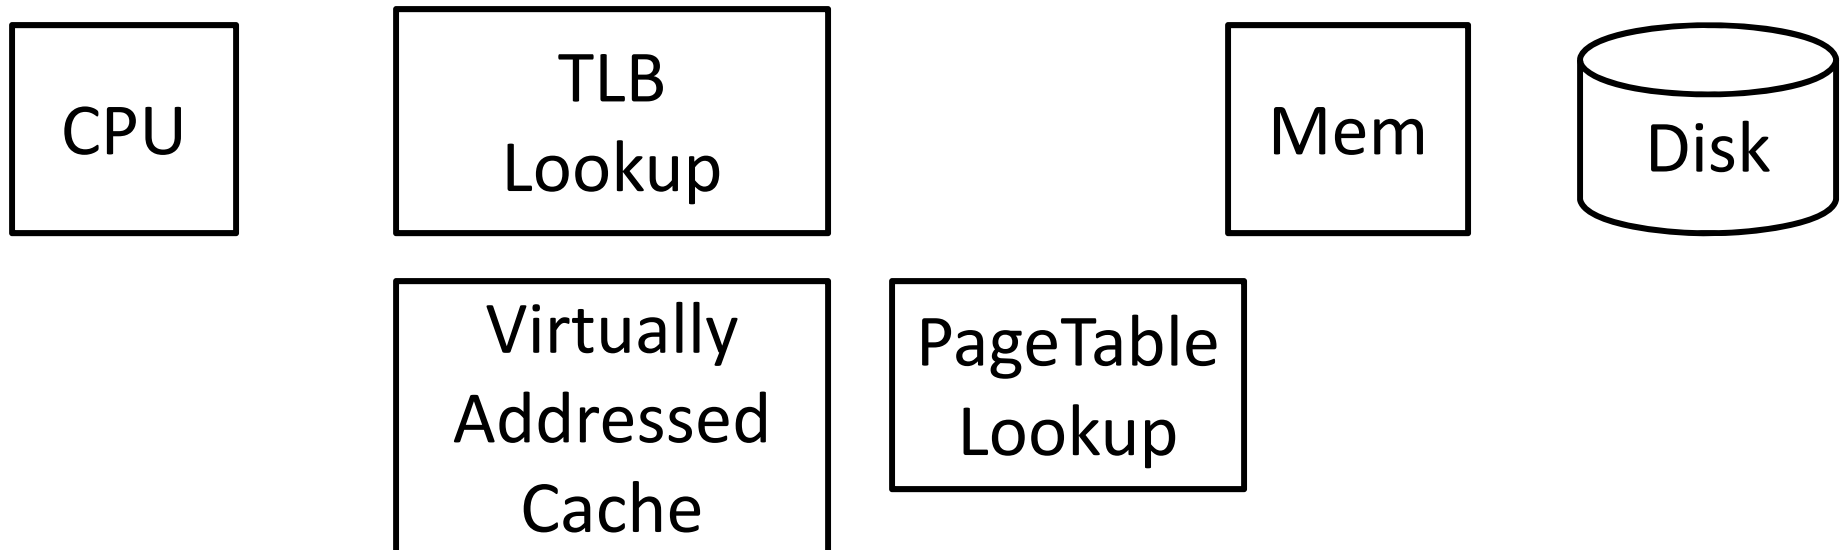

Virtual vs. Physical Caches

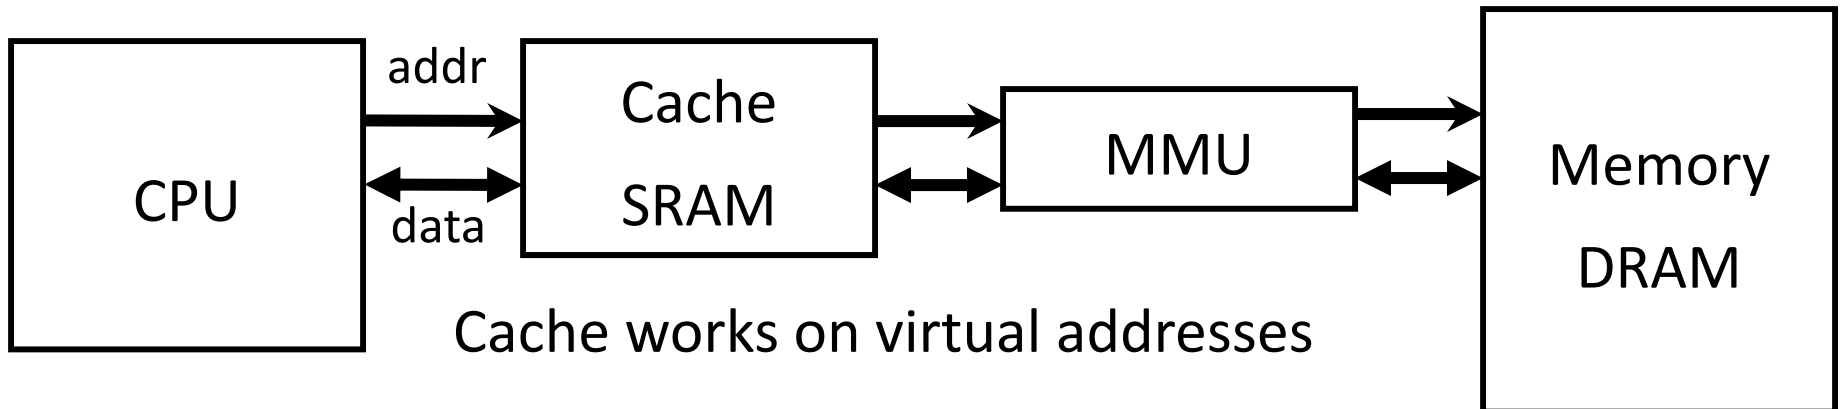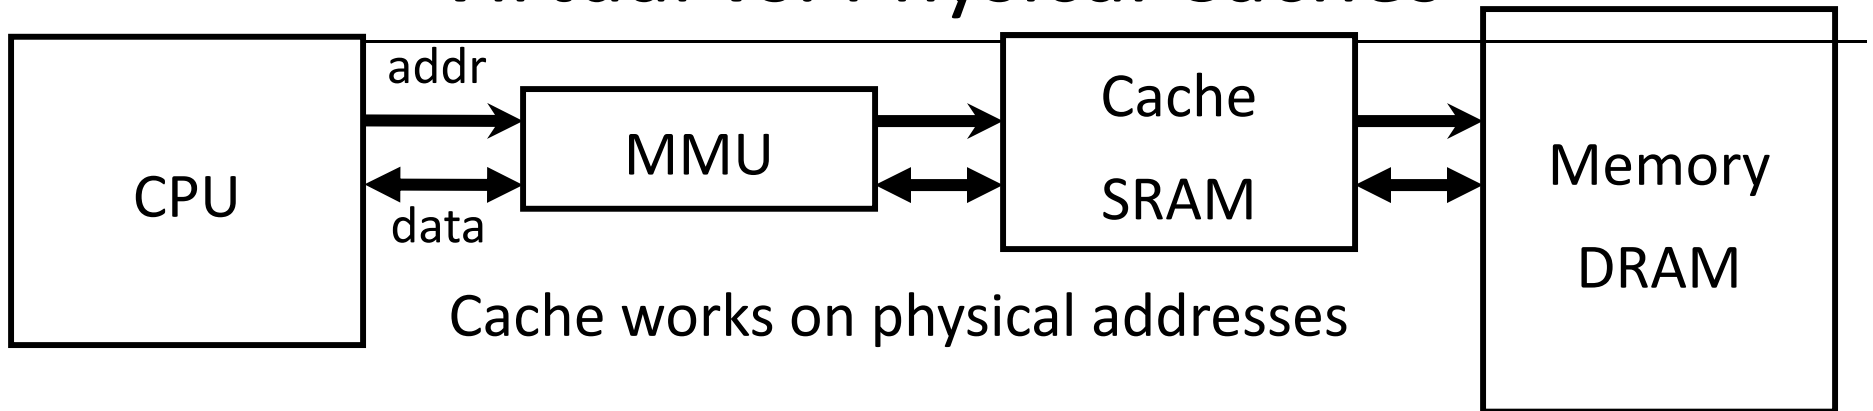

Q: What happens on context switch?

Q: What about virtual memory aliasing?

Q: So what's wrong with physically addressed caches?

Indexing vs. Tagging

Physically-Addressed Cache

- slow: requires TLB (and maybe PageTable) lookup first


Virtually-Addressed Cache

- fast: start TLB lookup before cache lookup finishes
- PageTable changes (paging, context switch, etc.)
 - need to purge stale cache lines (how?)
- Synonyms (two virtual mappings for one physical page)
 - could end up in cache twice (very bad!)

Virtually-Indexed, Physically Tagged Cache

- ~fast: TLB lookup in parallel with cache lookup
- PageTable changes → no problem: phys. tag mismatch
- Synonyms → search and evict lines with same phys. tag

Typical Cache Setup

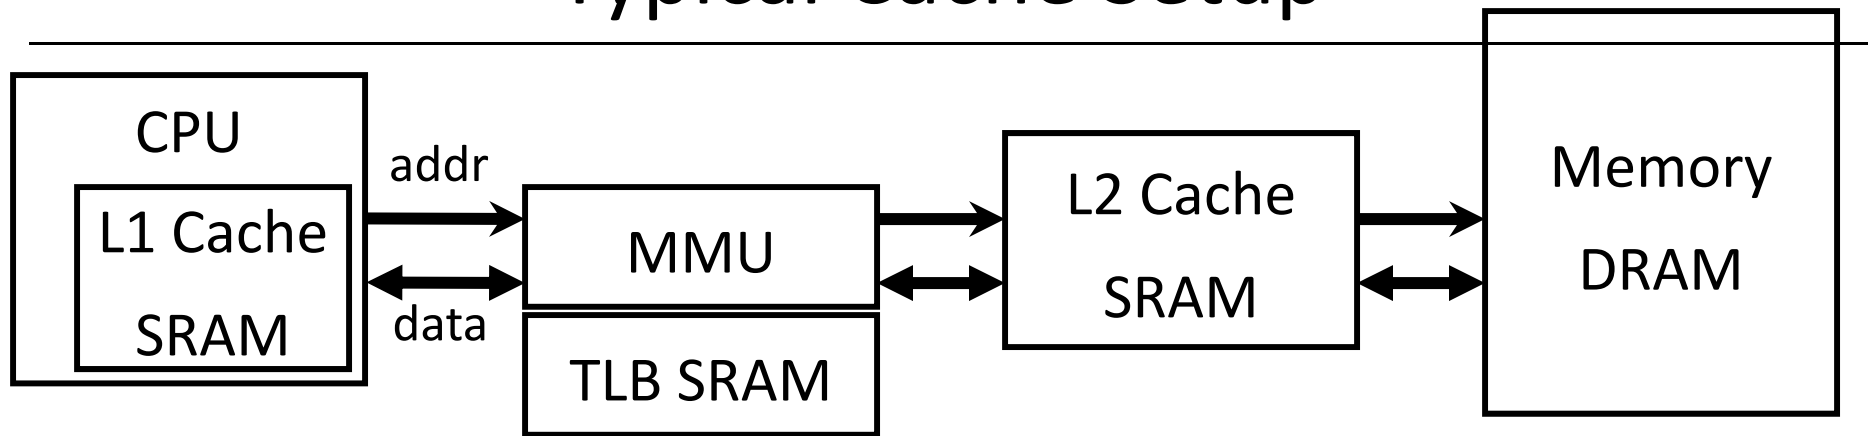

Typical L1: On-chip virtually addressed, physically tagged

Typical L2: On-chip physically addressed

Typical L3: On-chip ...

Summary of Caches/TLBs/VM

Caches, Virtual Memory, & TLBs

Where can block be placed?

- Direct, n-way, fully associative

What block is replaced on miss?

- LRU, Random, LFU, ...

How are writes handled?

- No-write (w/ or w/o automatic invalidation)
- Write-back (fast, block at time)
- Write-through (simple, reason about consistency)

Summary of Caches/TLBs/VM

Caches, Virtual Memory, & TLBs

Where can block be placed?

- Caches: direct/n-way/fully associative (fa)
- VM: fa, but with a table of contents to eliminate searches
- TLB: fa

What block is replaced on miss?

- varied

How are writes handled?

- Caches: usually write-back, or maybe write-through, or maybe no-write w/ invalidation
- VM: write-back
- TLB: usually no-write

Summary of Cache Design Parameters

	L1	Paged Memory	TLB
Size (blocks)	1/4k to 4k	16k to 1M	64 to 4k
Size (kB)	16 to 64	1M to 4G	2 to 16
Block size (B)	16-64	4k to 64k	4-32
Miss rates	2%-5%	10^{-4} to $10^{-50}\%$	0.01% to 2%
Miss penalty	10-25	10M-100M	100-1000

Administrivia

Lab3 available now

- Take Home Lab, finish within day or two of your Lab
- Work ***alone***

Administrivia

Next five weeks

- Week 10 (Apr 1): Project2 due and Lab3 handout
- Week 11 (Apr 8): Lab3 due and Project3/HW4 handout
- Week 12 (Apr 15): Project3 design doc due and HW4 due
- Week 13 (Apr 22): Project3 due and Prelim3
- Week 14 (Apr 29): Project4 handout

Final Project for class

- Week 15 (May 6): Project4 design doc due
- Week 16 (May 13): Project4 due