Ray Tracing

CS 4620 Lecture 4

A Little Background

- Ray casting
  - Process of shooting rays into scene to get pixel colors
  - Nonrecursive, i.e., no interreflections
  - Origin: Arthur Appel, 1968 (earlier work by others for nonrendering)
- Ray tracing
  - Process of shooting rays into scene and resolving reflections and refractions to get pixel colors
  - Recursive by nature
  - Origin:

Turner Whitted 1980

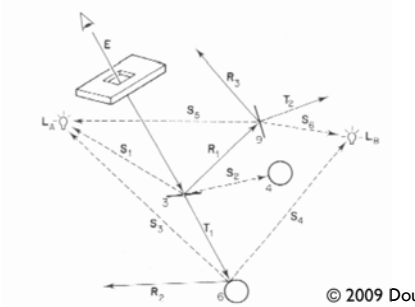

Motivation

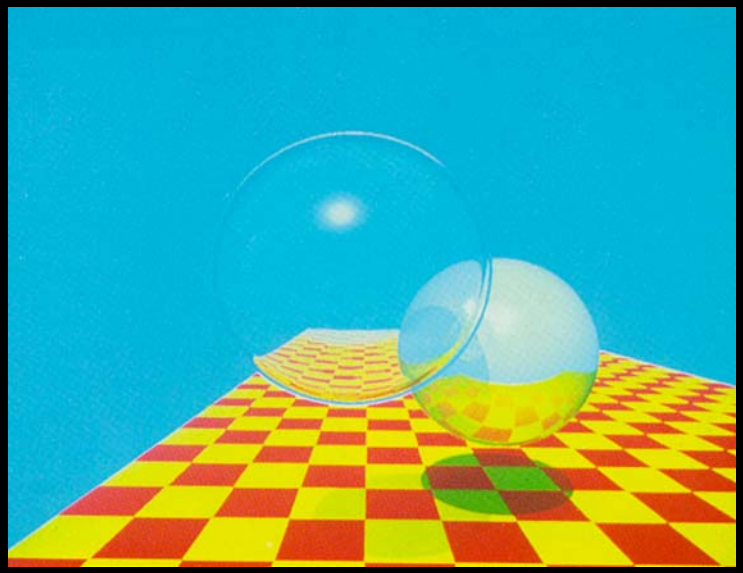

Turner Whitted, 1980

Motivation

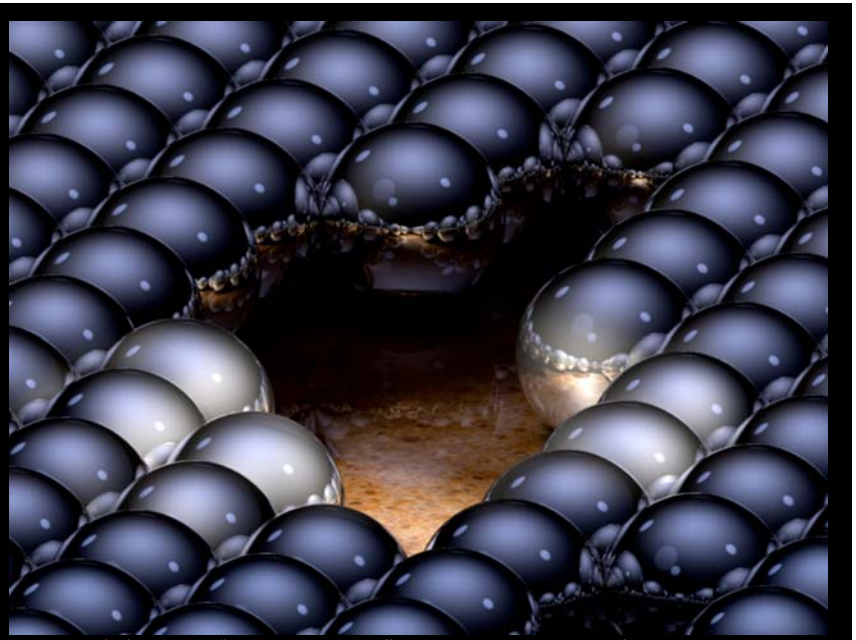

The number of reflections a "ray" can take and how it is affected each time it encounters a surface is all controlled via software settings during ray tracing. Here, each ray was allowed to reflect up to 16 times. Multiple "reflections of reflections" can thus be seen.

["Greg L," 2008 (Wikimedia Commons)]

Motivation

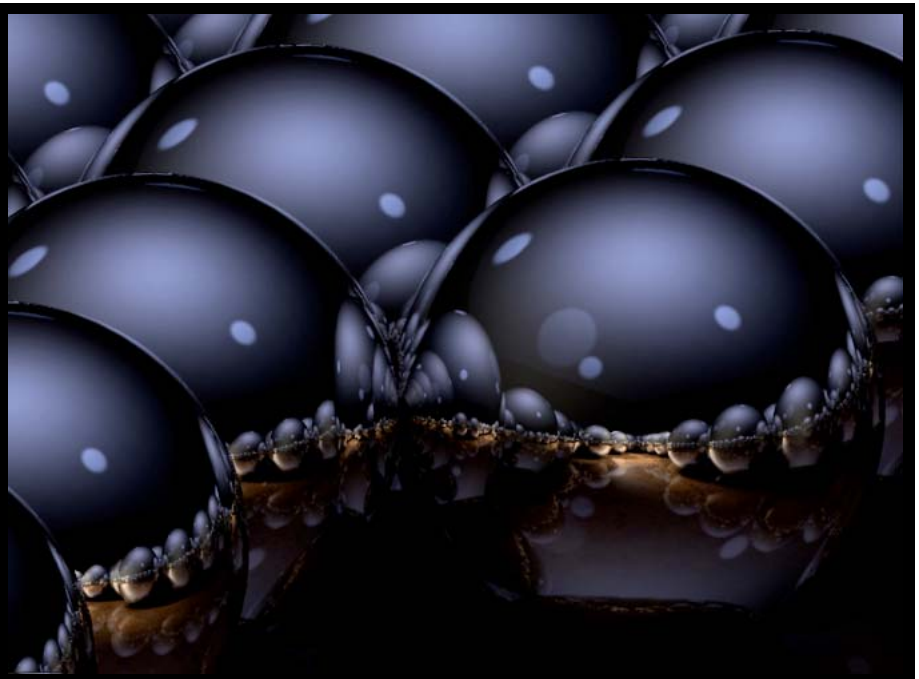

(Zoom)

Motivation

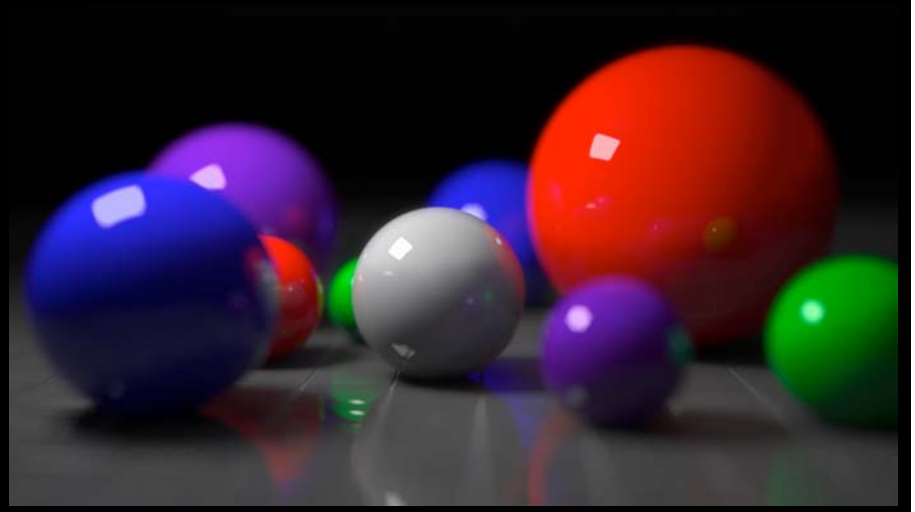

"A render of a few spheres, created in Rhinoceros 3D and rendered using V-Ray. This render features: Depth of field, hexagonal aperture (and consequently hexagonal bokeh), Fresnel reflections, area lights, global illumination, diffuse interreflection, ambient occlusion etc."
[Mimigu 2009 (Wikipedia)]

Motivation

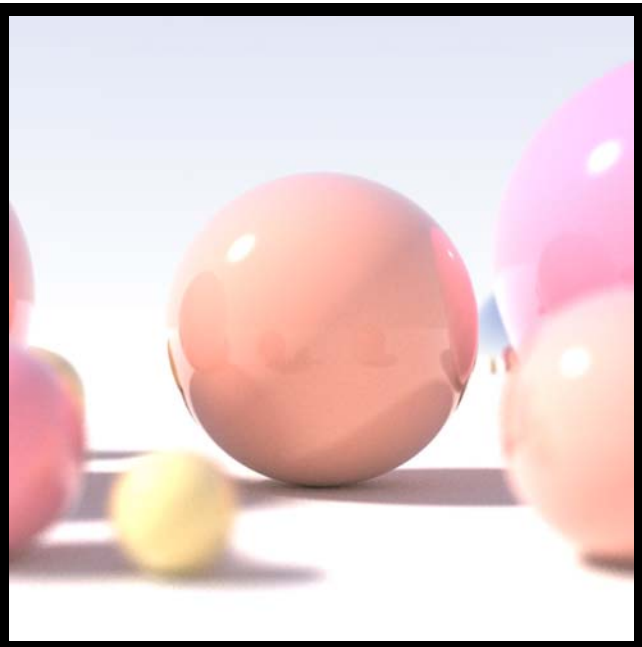

"Recursive raytracing of a sphere, which incorporates the effects of diffuse interreflection, depth-of-field, ambient occlusion, area light sources, and Fresnel reflection."
[Tim Babb, 2008 (Wikimedia Commons)]

Motivation

"This image was created by Gilles Tran with POV-Ray 3.6 using Radiosity."

Ray tracing idea

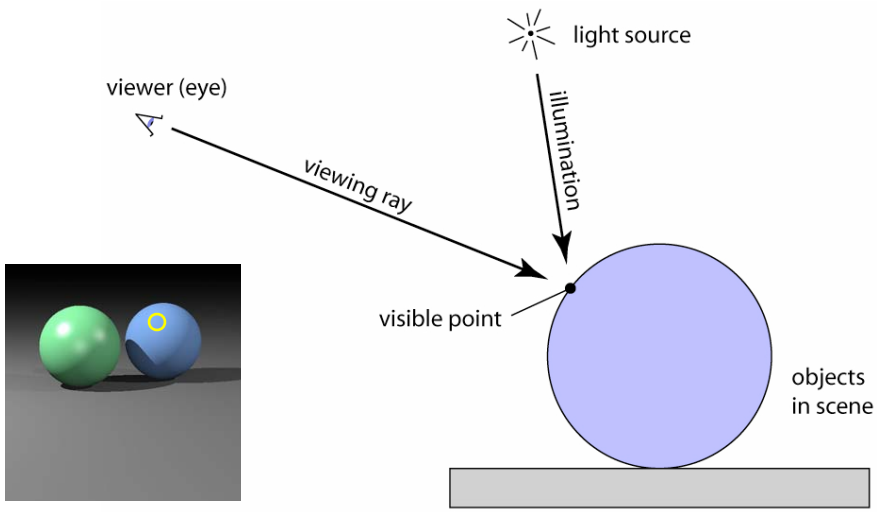

Ray tracing algorithm

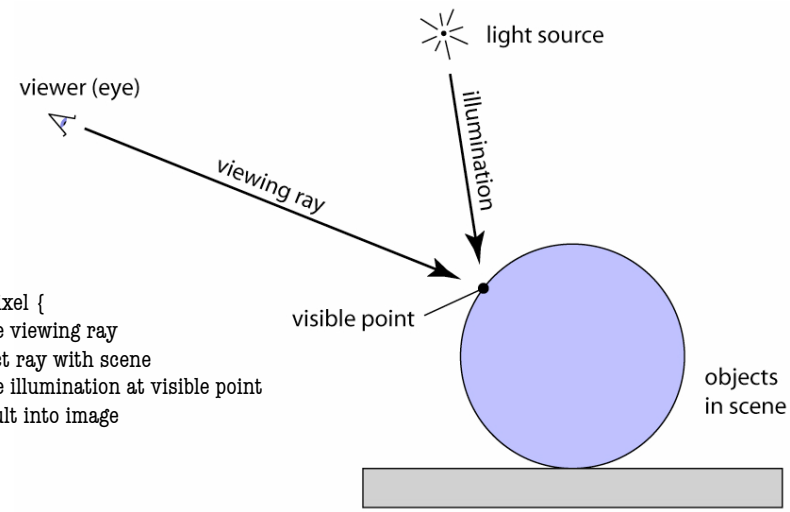


```
for each pixel {
    compute viewing ray
    intersect ray with scene
    compute illumination at visible point
    put result into image
    }
```


Generating eye rays

- Use window analogy directly

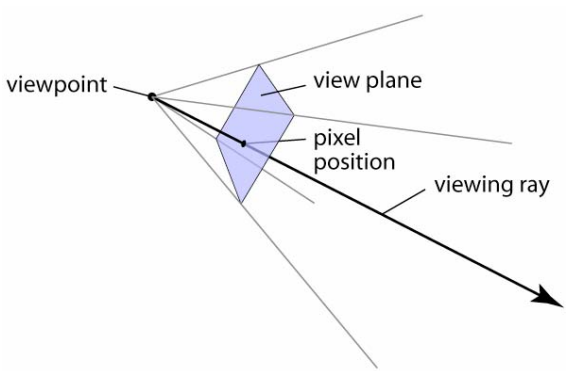

Generating eye rays

- Use window analogy directly

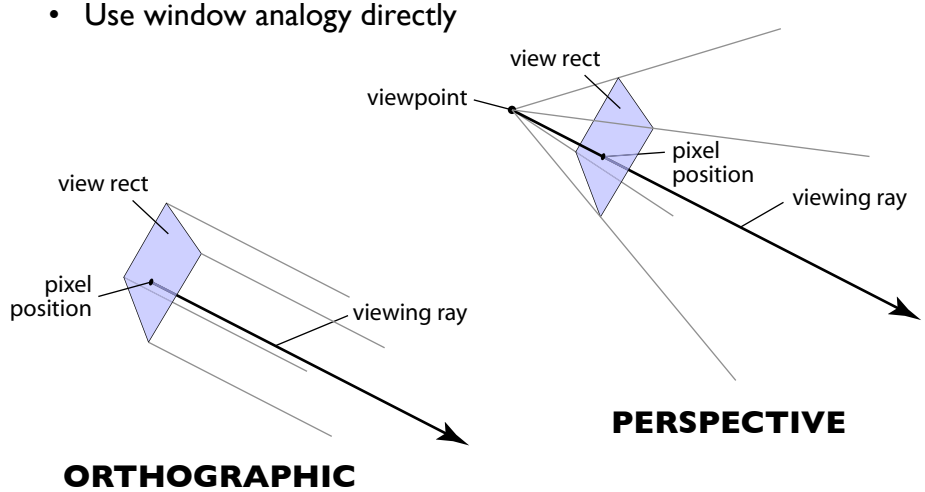

Vector math review

- Vectors and points
- Vector operations
  - addition
  - scalar product
- More products
  - dot product
  - cross product
- Bases and orthogonality

Generating eye rays—orthographic

- Just need to compute the view plane point **s**:

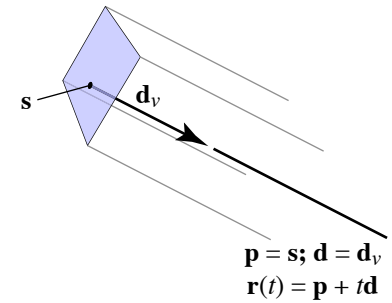

  - but where exactly is the view rectangle?

Generating eye rays—orthographic

- Positioning the view rectangle
  - establish three vectors to be *camera basis:* **u**, **v**, **w**
  - view rectangle is in **u**–**v** plane, specified by l, r, t, b
  - now ray generation is easy:

$$\mathbf{s} = \mathbf{e} + u\mathbf{u} + v\mathbf{v}$$
$$\mathbf{p} = \mathbf{s};\ \mathbf{d} = -\mathbf{w}$$
$$\mathbf{r}(t) = \mathbf{p} + t\mathbf{d}$$

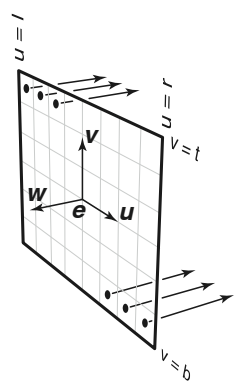

Generating eye rays—perspective

- View rectangle needs to be away from viewpoint
- Distance is important: "focal length" of camera
  - still use camera frame but position view rect away from viewpoint
  - ray origin always **e**
  - ray direction now controlled by **s**

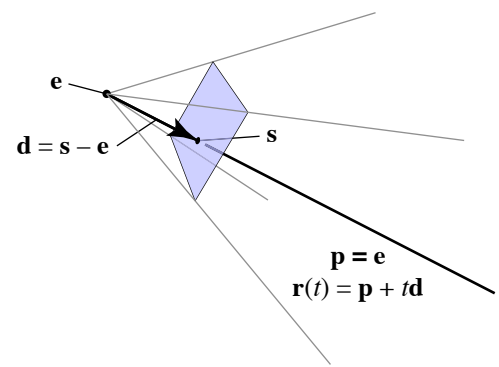

Generating eye rays—perspective

- Compute **s** in the same way; just subtract $d\mathbf{w}$
  - coordinates of **s** are $(u, v, -d)$

$$\mathbf{s} = \mathbf{e} + u\mathbf{u} + v\mathbf{v} - d\mathbf{w}$$
$$\mathbf{p} = \mathbf{e};\ \mathbf{d} = \mathbf{s} - \mathbf{e}$$
$$\mathbf{r}(t) = \mathbf{p} + t\mathbf{d}$$

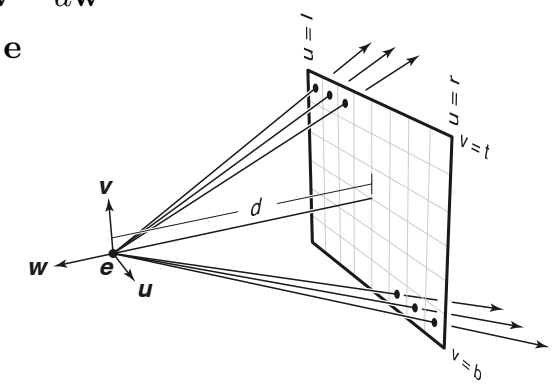

Pixel-to-image mapping

- One last detail: (u, v) coords of a pixel

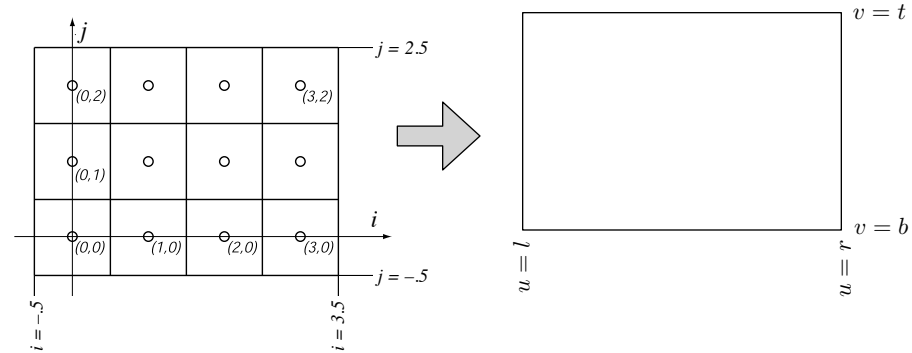

$$u = l + (r - l)(i + 0.5)/n_x$$
$$v = b + (t - b)(j + 0.5)/n_y$$

Ray intersection

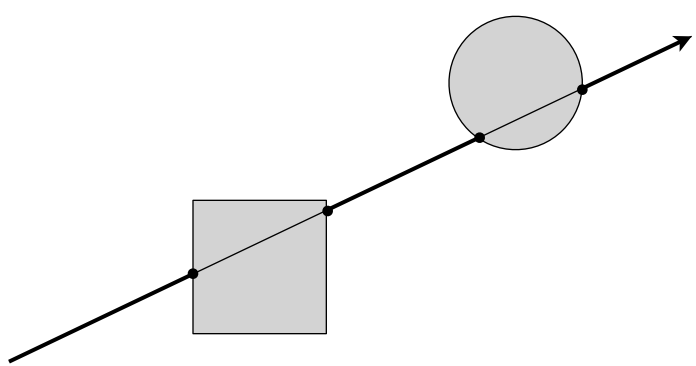

Ray: a half line

- Standard representation: point **p** and direction **d**

  $$\mathbf{r}(t) = \mathbf{p} + t\mathbf{d}$$

  - this is a *parametric equation* for the line
  - lets us directly generate the points on the line
  - if we restrict to $t > 0$ then we have a ray
  - note replacing **d** with a**d** doesn't change ray ($a > 0$)

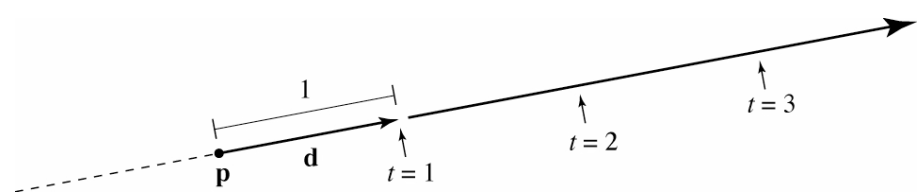

Ray-sphere intersection: algebraic

- Condition 1: point is on ray

$$\mathbf{r}(t) = \mathbf{p} + t\mathbf{d}$$

- Condition 2: point is on sphere
  - assume unit sphere; see Shirley or notes for general

$$\|\mathbf{x}\| = 1 \Leftrightarrow \|\mathbf{x}\|^2 = 1$$
$$f(\mathbf{x}) = \mathbf{x} \cdot \mathbf{x} - 1 = 0$$

- Substitute:

$$(\mathbf{p} + t\mathbf{d}) \cdot (\mathbf{p} + t\mathbf{d}) - 1 = 0$$

  - this is a quadratic equation in *t*

Ray-sphere intersection: algebraic

- Solution for *t* by quadratic formula:

$$t = \frac{-\mathbf{d} \cdot \mathbf{p} \pm \sqrt{(\mathbf{d} \cdot \mathbf{p})^2 - (\mathbf{d} \cdot \mathbf{d})(\mathbf{p} \cdot \mathbf{p} - 1)}}{\mathbf{d} \cdot \mathbf{d}}$$
$$t = -\mathbf{d} \cdot \mathbf{p} \pm \sqrt{(\mathbf{d} \cdot \mathbf{p})^2 - \mathbf{p} \cdot \mathbf{p} + 1}$$

  - simpler form holds when **d** is a unit vector
    but we won't assume this in practice (reason later)
  - I'll use the unit-vector form to make the geometric interpretation

Ray-sphere intersection: geometric

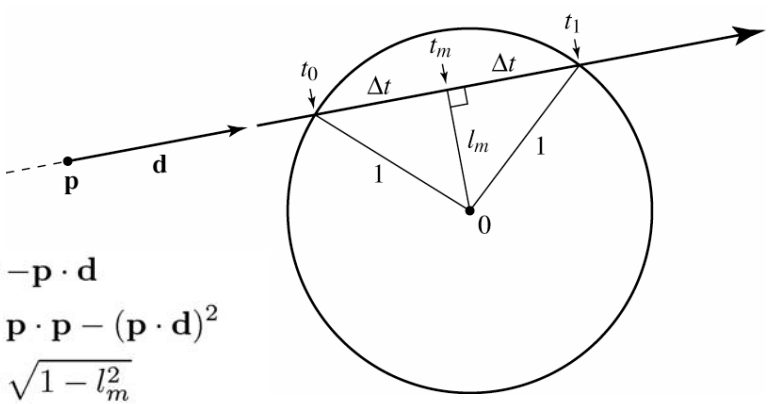

$$t_m = -\mathbf{p} \cdot \mathbf{d}$$
$$l_m^2 = \mathbf{p} \cdot \mathbf{p} - (\mathbf{p} \cdot \mathbf{d})^2$$
$$\Delta t = \sqrt{1 - l_m^2}$$
$$= \sqrt{(\mathbf{p} \cdot \mathbf{d})^2 - \mathbf{p} \cdot \mathbf{p} + 1}$$
$$t_{0,1} = t_m \pm \Delta t = -\mathbf{p} \cdot \mathbf{d} \pm \sqrt{(\mathbf{p} \cdot \mathbf{d})^2 - \mathbf{p} \cdot \mathbf{p} + 1}$$

Ray-box intersection

- Could intersect with 6 faces individually
- Better way: box is the intersection of 3 slabs

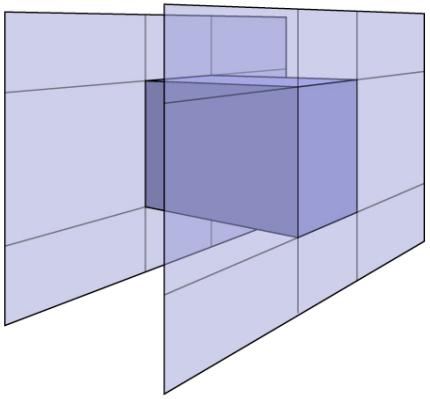

Ray-slab intersection

- 2D example
- 3D is the same!

$$p_x + t_{x\min}\, d_x = x_{\min}$$
$$t_{x\min} = (x_{\min} - p_x)/d_x$$

$$p_y + t_{y\min}\, d_y = y_{\min}$$
$$t_{y\min} = (y_{\min} - p_y)/d_y$$

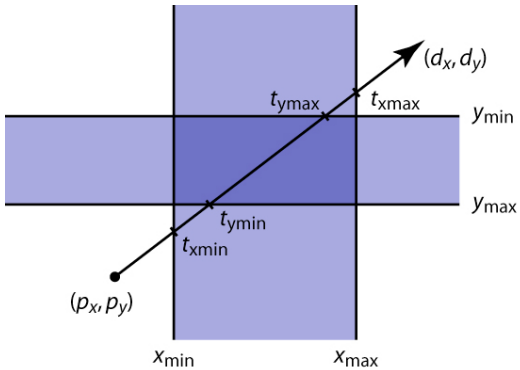

Intersecting intersections

- Each intersection is an interval
- Want last entry point and first exit point

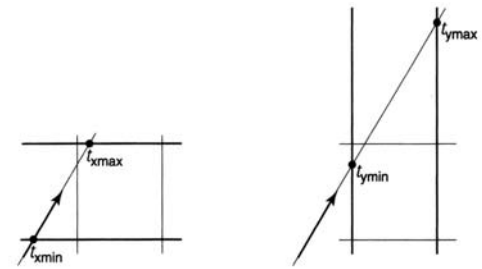

$$t_{\min} = \max(t_{x\min}, t_{y\min})$$
$$t_{\max} = \min(t_{x\max}, t_{y\max})$$

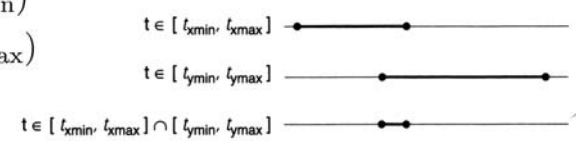

Shirley fig. 10.16

Ray-triangle intersection

- Condition 1: point is on ray

$$\mathbf{r}(t) = \mathbf{p} + t\mathbf{d}$$

- Condition 2: point is on plane

$$(\mathbf{x} - \mathbf{a}) \cdot \mathbf{n} = 0$$

- Condition 3: point is on the inside of all three edges
- First solve 1&2 (ray–plane intersection)
  - substitute and solve for *t*:

$$(\mathbf{p} + t\mathbf{d} - \mathbf{a}) \cdot \mathbf{n} = 0$$
$$t = \frac{(\mathbf{a} - \mathbf{p}) \cdot \mathbf{n}}{\mathbf{d} \cdot \mathbf{n}}$$

Ray-triangle intersection

- In plane, triangle is the intersection of 3 half spaces

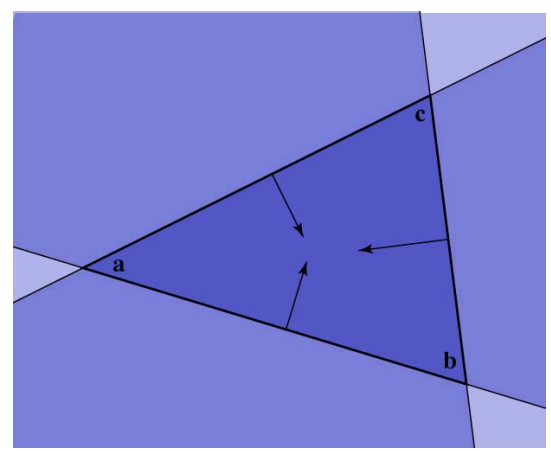

Inside-edge test

- Need outside vs. inside
- Reduce to clockwise vs. counterclockwise
  - vector of edge to vector to **x**
- Use cross product to decide

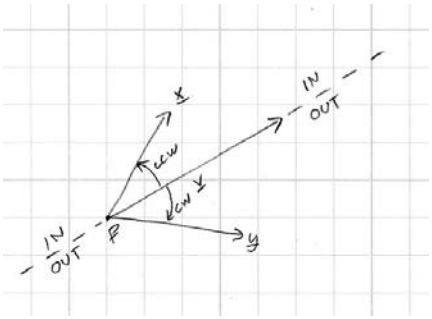

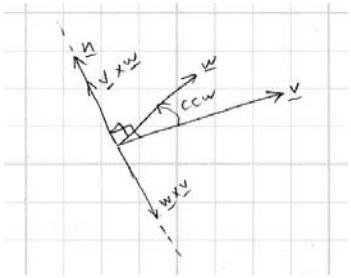

Ray-triangle intersection

$$(\mathbf{b}-\mathbf{a})\times(\mathbf{x}-\mathbf{a})\cdot\mathbf{n}>0$$

$$(\mathbf{c}-\mathbf{b})\times(\mathbf{x}-\mathbf{b})\cdot\mathbf{n}>0$$

$$(\mathbf{a}-\mathbf{c})\times(\mathbf{x}-\mathbf{c})\cdot\mathbf{n}>0$$

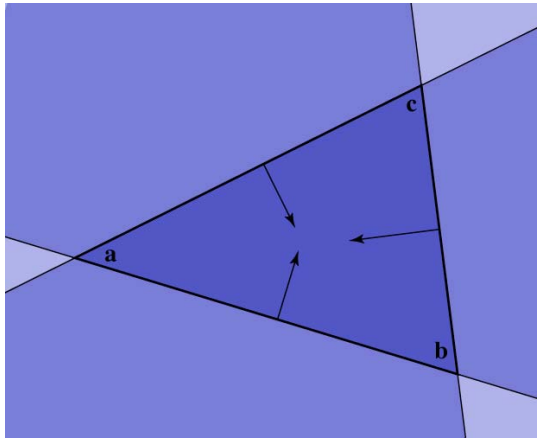

Ray-triangle intersection

- See book for a more efficient method based on linear systems
  - (don't need this for Ray 1 anyhow—but stash away for Ray 2)

Image so far

- With eye ray generation and sphere intersection

```
Surface s = new Sphere((0.0, 0.0, 0.0), 1.0);
for 0 <= iy < ny
   for 0 <= ix < nx {
      ray = camera.getRay(ix, iy);
      hitSurface, t = s.intersect(ray, 0, +inf)
      if hitSurface is not null
         image.set(ix, iy, white);
   }
```

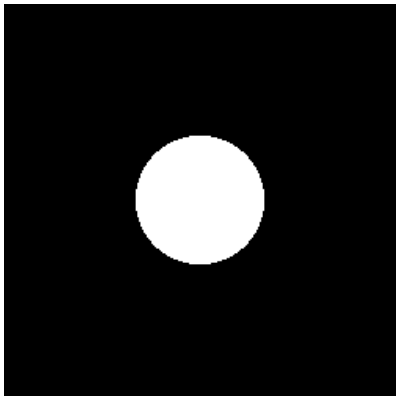

Intersection against many shapes

- The basic idea is:

```
Group.intersect (ray, tMin, tMax) {
   tBest = +inf; firstSurface = null;
   for surface in surfaceList {
      hitSurface, t = surface.intersect(ray, tMin, tBest);
      if hitSurface is not null {
         tBest = t;
         firstSurface = hitSurface;
      }
   }
return hitSurface, tBest;
}
```

  – this is linear in the number of shapes
  but there are sublinear methods (acceleration structures)

Image so far

- With eye ray generation and scene intersection

```
for 0 <= iy < ny
   for 0 <= ix < nx {
      ray = camera.getRay(ix, iy);
      c = scene.trace(ray, 0, +inf);
      image.set(ix, iy, c);
   }

...

Scene.trace(ray, tMin, tMax) {
   surface, t = surfs.intersect(ray, tMin, tMax);
   if (surface != null) return surface.color();
   else return black;
}
```

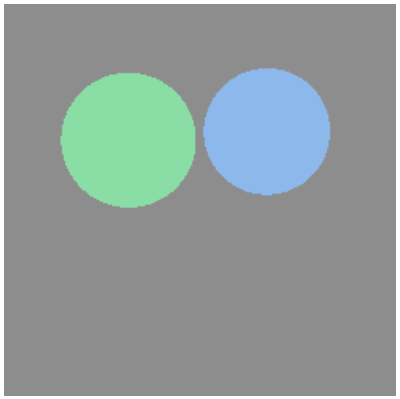

Shading

- Compute light reflected toward camera
- Inputs:
  – eye direction
  – light direction
  (for each of many lights)
  – surface normal
  – surface parameters
  (color, shininess, …)

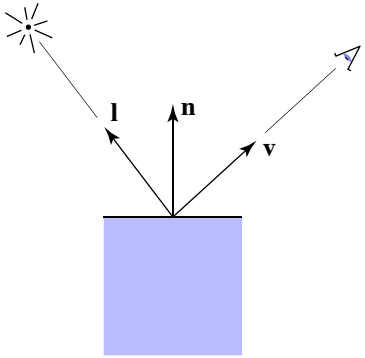

Diffuse reflection

- Light is scattered uniformly in all directions
  – the surface color is the same for all viewing directions
- Lambert's cosine law

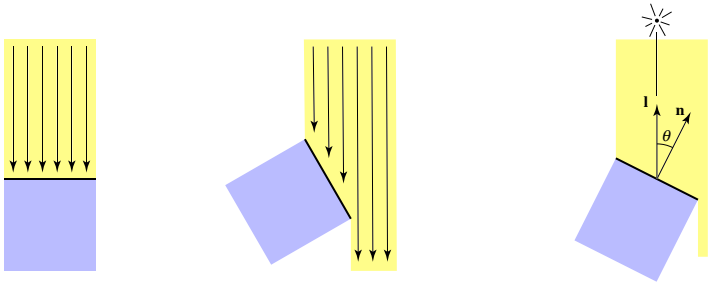

Top face of cube receives a certain amount of light

Top face of 60° rotated cube intercepts half the light

In general, light per unit area is proportional to $\cos\theta = \mathbf{l} \cdot \mathbf{n}$

Lambertian shading

- Shading independent of view direction

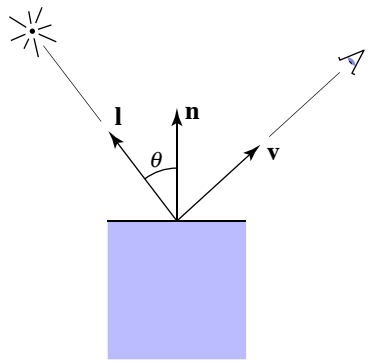

illumination from source

$$L_d = k_d \, I \max(0, \mathbf{n} \cdot \mathbf{l})$$

diffuse coefficient

diffusely reflected light

Lambertian shading

- Produces matte appearance

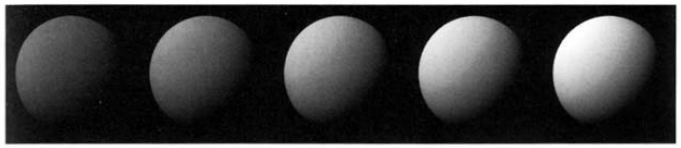

k_d ⟶

[Foley et al.]

Diffuse shading

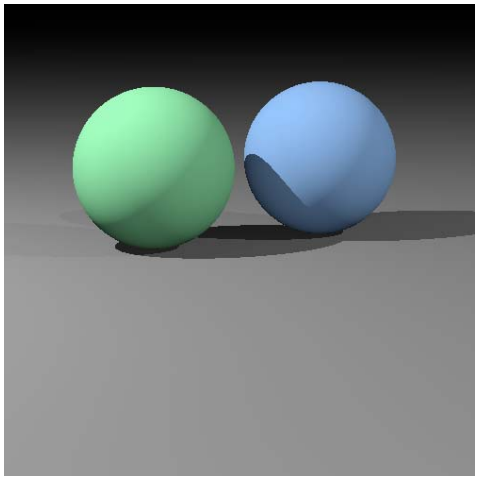

Image so far

```
Scene.trace(Ray ray, tMin, tMax) {
    surface, t = hit(ray, tMin, tMax);
    if surface is not null {
        point = ray.evaluate(t);
        normal = surface.getNormal(point);
        return surface.shade(ray, point,
            normal, light);
    }
    else return backgroundColor;
}

...

Surface.shade(ray, point, normal, light) {
    v = −normalize(ray.direction);
    l = normalize(light.pos − point);
    // compute shading
}
```

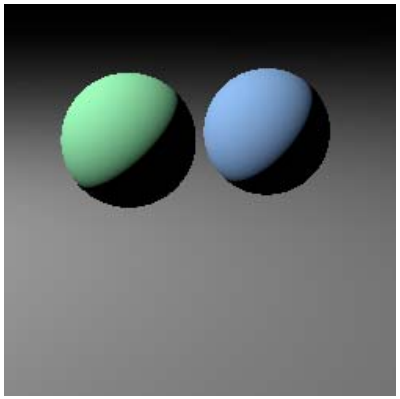

Shadows

- Surface is only illuminated if nothing blocks its view of the light.
- With ray tracing it's easy to check
  - just intersect a ray with the scene!

Image so far

```
Surface.shade(ray, point, normal, light) {
   shadRay = (point, light.pos − point);
   if (shadRay not blocked) {
      v = −normalize(ray.direction);
      l = normalize(light.pos − point);
      // compute shading
   }
   return black;
}
```

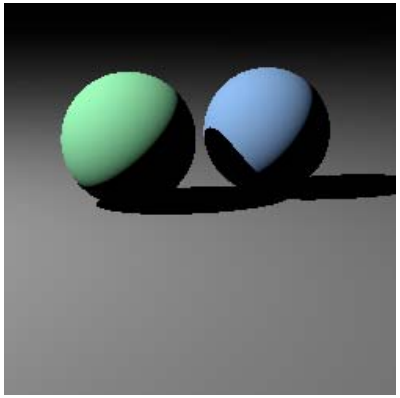

Shadow rounding errors

- Don't fall victim to one of the classic blunders:

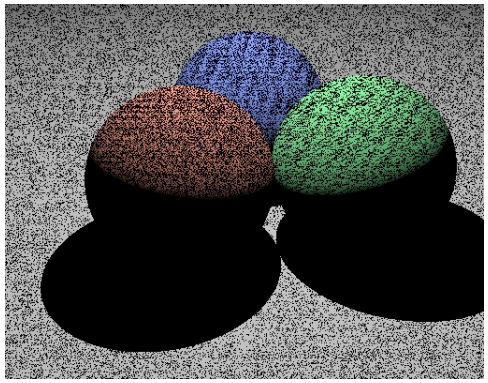

- What's going on?
  - hint: at what *t* does the shadow ray intersect the surface you're shading?

Shadow rounding errors

- Solution: shadow rays start a tiny distance from the surface

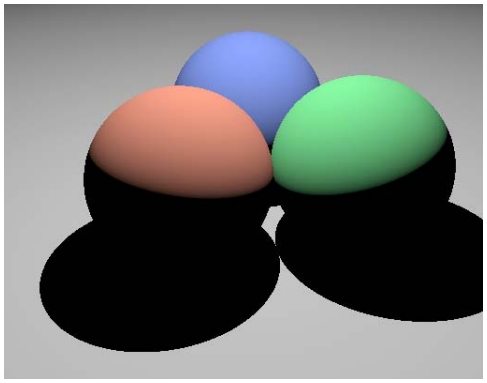

- Do this by moving the start point, or by limiting the *t* range

Multiple lights

- Important to fill in black shadows
- Just loop over lights, add contributions
- Ambient shading
  - black shadows are not really right
  - one solution: dim light at camera
  - alternative: add a constant "ambient" color to the shading…

Image so far

```
shade(ray, point, normal, lights) {
   result = ambient;
   for light in lights {
      if (shadow ray not blocked) {
         result += shading contribution;
      }
   }
   return result;
}
```

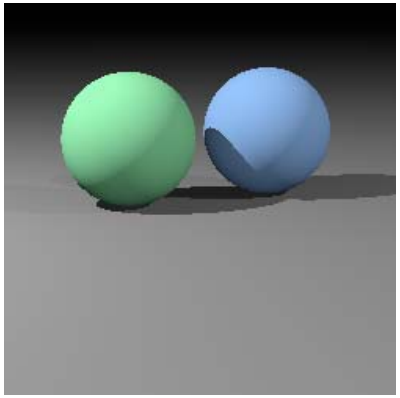

Specular shading (Blinn-Phong)

- Intensity depends on view direction
  - bright near mirror configuration

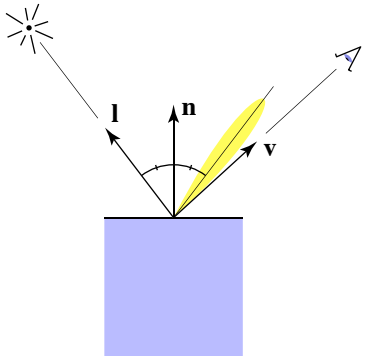

Specular shading (Blinn-Phong)

- Close to mirror ⇔ half vector near normal
  - Measure "near" by dot product of unit vectors

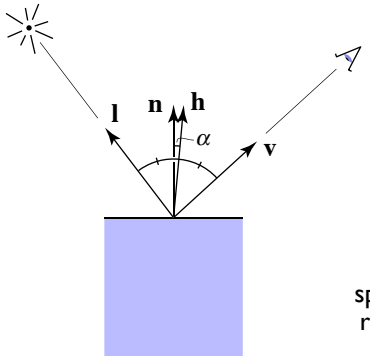

$$\mathbf{h} = \text{bisector}(\mathbf{v}, \mathbf{l}) = \frac{\mathbf{v}+\mathbf{l}}{\|\mathbf{v}+\mathbf{l}\|}$$

$$L_s = k_s\, I \max(0, \cos\alpha)^p = k_s\, I \max(0, \mathbf{n}\cdot\mathbf{h})^p$$

specularly reflected light

specular coefficient

Phong model—plots

- Increasing *n* narrows the lobe

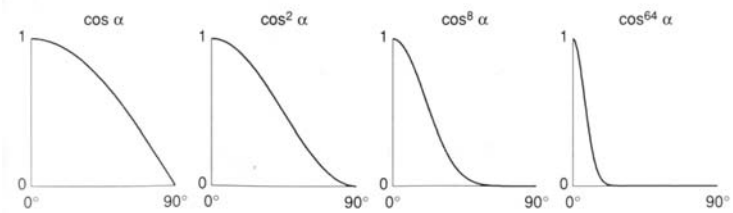

Fig. 16.9 Different values of $\cos^n \alpha$ used in the Phong illumination model.

[Foley et al.]

Specular shading

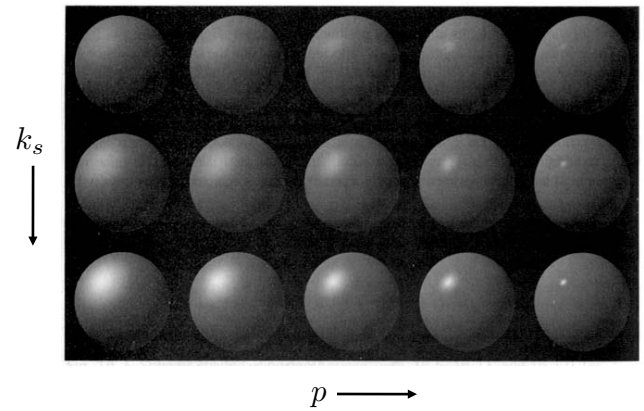

[Foley et al.]

Diffuse + Phong shading

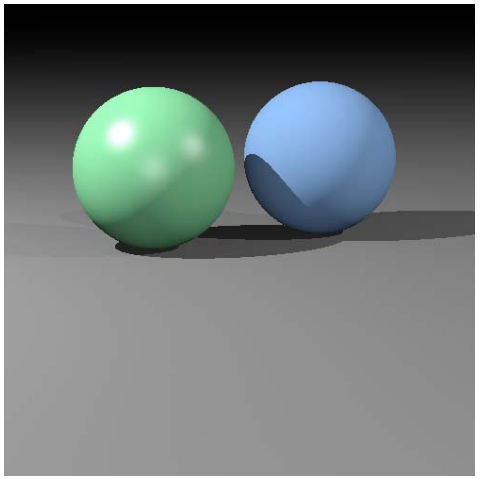

Ambient shading

- Shading that does not depend on anything
  - add constant color to account for disregarded illumination and fill in black shadows



$$L_a = k_a \, I_a$$

ambient coefficient

reflected ambient light

Putting it together

- Usually include ambient, diffuse, Phong in one model

$$
\begin{aligned}
L &= L_a + L_d + L_s \\
&= k_a\, I_a + k_d\, I \max(0, \mathbf{n}\cdot\mathbf{l}) + k_s\, I \max(0, \mathbf{n}\cdot\mathbf{h})^p
\end{aligned}
$$

- The final result is the sum over many lights

$$L = L_a + \sum_{i=1}^{N} [(L_d)_i + (L_s)_i]$$

$$L = k_a\, I_a + \sum_{i=1}^{N} [k_d\, I_i \max(0, \mathbf{n}\cdot\mathbf{l}_i) + k_s\, I_i \max(0, \mathbf{n}\cdot\mathbf{h}_i)^p]$$

LightMaterial Demo

OpenGL Tutors program by Nate Robins
http://www.xmission.com/~nate/tutors.html

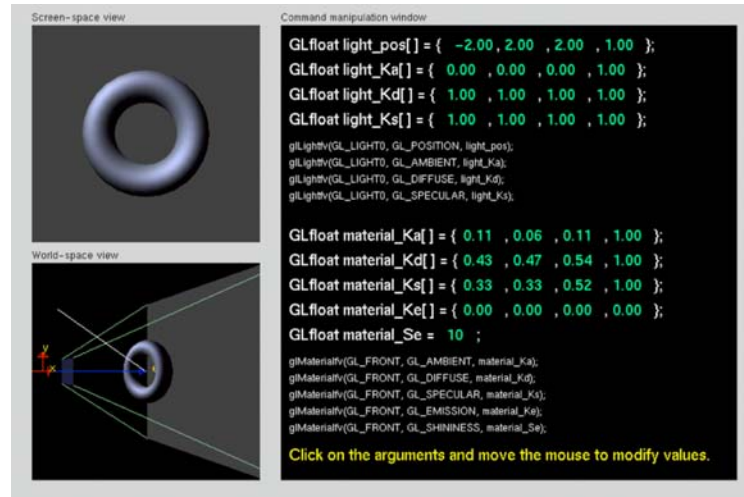

Mirror reflection

- Consider perfectly shiny surface
  - there isn't a highlight
  - instead there's a reflection of other objects
- Can render this using recursive ray tracing
  - to find out mirror reflection color, ask what color is seen from surface point in reflection direction
  - already computing reflection direction for Phong…
- "Glazed" material has mirror reflection and diffuse

$$L = L_a + L_d + L_m$$

  - where L_m is evaluated by tracing a new ray

Mirror reflection

- Intensity depends on view direction
  - reflects incident light from mirror direction



$$
\begin{aligned}
\mathbf{r} &= \mathbf{v} + 2((\mathbf{n}\cdot\mathbf{v})\mathbf{n} - \mathbf{v}) \\
&= 2(\mathbf{n}\cdot\mathbf{v})\mathbf{n} - \mathbf{v}
\end{aligned}
$$

Diffuse + mirror reflection (glazed)

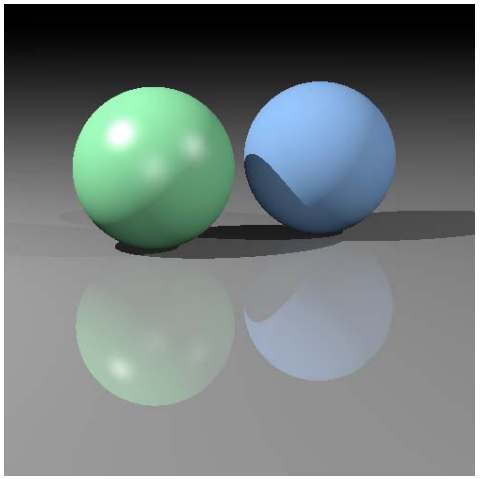

(glazed material on floor)

Ray tracer architecture 101

- You want a class called Ray
  - point and direction; evaluate(t)
  - possible: tMin, tMax
- Some things can be intersected with rays
  - individual surfaces
  - groups of surfaces (acceleration goes here)
  - the whole scene
  - make these all subclasses of Surface
  - limit the range of valid *t* values (*e.g.* shadow rays)
- Once you have the visible intersection, compute the color
  - may want to separate shading code from geometry
  - separate class: Material (each Surface holds a reference to one)
  - its job is to compute the color

Architectural practicalities

- Return values
  - surface intersection tends to want to return multiple values
    - *t*, surface or shader, normal vector, maybe surface point
  - in many programming languages (*e.g.* Java) this is a pain
  - typical solution: an *intersection record*
    - a class with fields for all these things
    - keep track of the intersection record for the closest intersection
    - be careful of accidental aliasing (which is very easy if you're new to Java)
- Efficiency
  - in Java the (or, a) key to being fast is to minimize creation of objects
  - what objects are created for every ray? try to find a place for them where you can reuse them.
  - Shadow rays can be cheaper (any intersection will do, don't need closest)
  - but: "First Get it Right, Then Make it Fast"