

Overview of Machine Learning

Can computers learn?

memorizing times tables

playing tennis

reading

taking advice

What is learning? Any algorithm that lets the system perform a task more effectively or more efficiently than before.

Slide CS472 – Machine Learning 1

Can Computers Learn?

- Learning a set of new facts
- Learning HOW to do something
- Improving ability of something already learned

Slide CS472 – Machine Learning 2

Simon's Definition of Machine Learning

“Learning denotes changes in the system that are adaptive in the sense that they enable the system to do the same task or tasks drawn from the same population more effectively the next time”

– *Machine Learning I*, 1983, Chapter 2.

Slide CS472 – Machine Learning 3

Types of Learning

- rote learning
- learning from instruction
- learning by analogy
- learning from examples
- learning from observation and discovery

– Carbonell, Michalski & Mitchell.

Slide CS472 – Machine Learning 4

Inductive Learning or Concept Learning

All learning can be seen as learning the representation of a function.

Inductive learning: system tries to induce a “general rule” from a set of observed instances.

Supervised learning: learning algorithm is given the correct value of the function for particular inputs, and changes its representation of the function to try to match the information provided by the feedback.

An **example** is a pair $(x, f(x))$, where x is the input and $f(x)$ is the output of the function applied to x .

Slide CS472 – Machine Learning 5

Example: Work or Play?

<i>outlook</i>	<i>temp</i>	<i>humidity</i>	<i>windy</i>	plan
sunny	hot	high	false	cs472
sunny	hot	high	true	cs472
overcast	hot	high	false	soccer
rain	mild	high	false	soccer
rain	cool	normal	false	soccer
rain	cool	normal	true	cs472

- Each instance/case, X , is a possible *Saturday*, described by the features *outlook*, *temp*, *humidity*, *windy*

Slide CS472 – Machine Learning 6

- The **target concept**, $f: \text{day} \rightarrow \{\text{soccer}, \text{cs472}\}$

Slide CS472 – Machine Learning 7

Examples of Classifier Tasks

Steering a vehicle: image in windshield \rightarrow direction to turn the wheel

Medical diagnosis: patient symptoms \rightarrow has disease/ does not have disease

Forensic hair comparison: image of two hairs \rightarrow match or not

Stock market prediction: closing price of last few days \rightarrow market will go up or down tomorrow

Telephone operator support: speech signal \rightarrow person said “yes” or “no” when asked whether they’d accept a collect call

Slide CS472 – Machine Learning 8

Building Classifiers

1. Learn about the domain, write a program that maps inputs to outputs (eg., rule-based medical diagnosis systems).
2. Automate the process using data in the form of observations $(x_i, F(x_i))$.
cholesterol=170,bp=170/95,... → heart disease = N
cholesterol=250,bp=170/95,... → heart disease = Y

Slide CS472 – Machine Learning 9

Inductive Learning

Induction task:

Given: collection of examples

Return: a function h (*hypothesis*) that approximates f (*target concept*).

OR

Given: a universe of objects described by a collection of attributes each labeled with one of a discrete number of classes

Return: a classification “rule” that can determine the class of any object from its attributes’ values

Slide CS472 – Machine Learning 10

Inductive learning hypothesis: any hypothesis found to approximate the target function well over a sufficiently large set of training examples will also approximate the target function well over any other unobserved examples.


Assumptions of Classifier Formation Algorithms:

- The sample represents the population
- The features permit discrimination

Slide CS472 – Machine Learning 11

Inductive Learning; Concept Learning

System tries to induce a general rule from a set of observed instances.

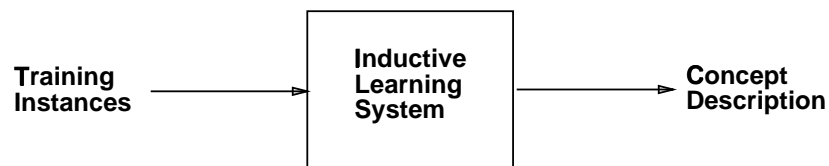

Concept description — method of classifying subsequent instances.

Slide CS472 – Machine Learning 12

Instance-Based Learning

Also called case-based learning; k -nearest neighbor.

A : set of features, A_1, \dots, A_n that describe the problem

$X = X_{a_1} X_{a_2} \dots X_{a_n}$, where X_{a_i} is the value of feature A_i in example X

$f(X) : X \rightarrow c \in C = \{c_1, \dots, c_m\}$

The *case base* is the set of training examples

$(X_1, f(X_1)), (X_2, f(X_2)), \dots$

Slide CS472 – Machine Learning 13

k -nearest neighbor algorithm for computing $f(X)$:

1. Compare new example, X , to each case, Y , in the case base and calculate for each pair:

$$sim(X, Y) = \sum_{i=1}^n match(X_{A_i}, Y_{A_i})$$

where $match(a, b)$ is a function that returns 1 if a and b are equal and 0 otherwise.

2. Let R = the top k cases ranked according to sim
3. Return as $f(X)$ the class, c , that wins the majority vote among $f(R_1), f(R_2), \dots, f(R_{|k|})$. Handle ties randomly.

Slide CS472 – Machine Learning 14

Types of Attributes

1. Symbolic (nominal) – $EyeColor \in \{brown, blue, green\}$
2. Boolean – $anemic \in \{TRUE, FALSE\}$
3. Numeric (Integer, Real) – $age \in [0, 105]$

How do we compute the similarity between
 $EyeColor = brown$ and $EyeColor = green$?

Slide CS472 – Machine Learning 15

Example of case retrieval

outlook	temp	humidity	windy	plan	<i>sim</i>
sunny	hot	high	false	cs472	
sunny	hot	high	true	cs472	
overcast	hot	high	false	soccer	
overcast	mild	normal	true	football	
rain	mild	high	false	soccer	
rain	cool	normal	false	soccer	

A : outlook, temp, humidity, windy

$k = 1, C = \{soccer, cs472\}$

test case: $X = sunny\ cool\ high\ false$

Slide CS472 – Machine Learning 16


k-Nearest Neighbor Algorithm

1. Memorizes all observed instances and their class
2. Rote Learning? – Is this really learning?
3. When does the induction take place?

Slide CS472 – Machine Learning 17

Poisonous Mushroom Decision Tree


Concept description: decision trees

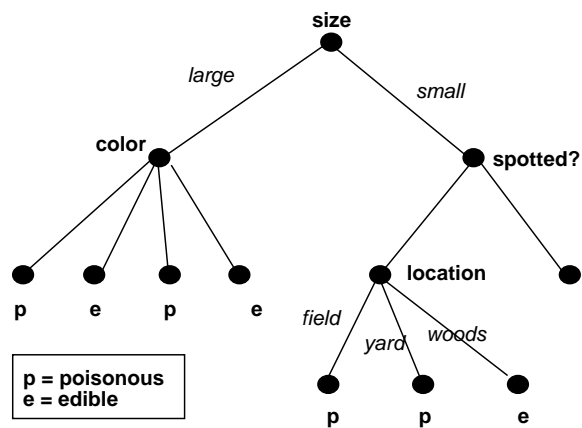

Slide CS472 – Machine Learning 18

Another Poisonous Mushroom Decision Tree?

Concept description: decision trees

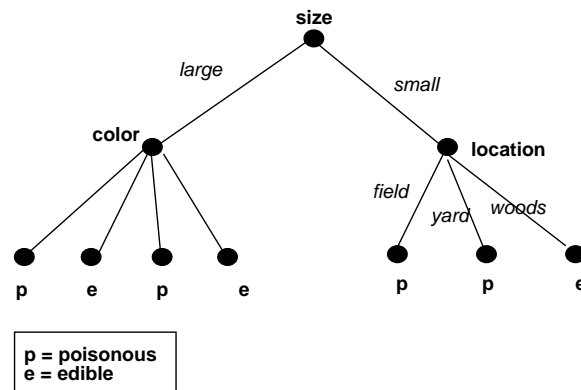

Slide CS472 – Machine Learning 19

Finding a Decision Tree

Goal: find the best decision tree

where *best* means the smallest tree consistent with data

Problem: goal is computationally intractable

Solution: use heuristic search

Slide CS472 – Machine Learning 20

Top Down Induction of Decision Trees

If all instances from same class

then tree is leaf with that class name

else

pick test for decision node

partition instances by test outcome

construct one branch for each possible outcome

build subtrees recursively

Slide CS472 – Machine Learning 21

Example

CS Major Database

Height	Eyes	Class
short	brown	hacker
tall	blue	theoretician
tall	brown	hacker
short	blue	theoretician

Slide CS472 – Machine Learning 22

A Concept Learning Task

Day	Outlook	Temp	Humidity	Wind	Play-Tennis?
D1	Sunny	Hot	High	Weak	No
D2	Sunny	Hot	High	Strong	No
D3	Overcast	Hot	High	Weak	Yes
D4	Rain	Mild	High	Weak	Yes
D5	Rain	Cool	Normal	Weak	Yes
D6	Rain	Cool	Normal	Strong	No
D7	Overcast	Cool	Normal	Strong	Yes
D8	Sunny	Mild	High	Weak	No
D9	Sunny	Cool	Normal	Weak	Yes
D10	Rain	Mild	Normal	Weak	Yes
D11	Sunny	Mild	Normal	Strong	Yes
D12	Overcast	Mild	High	Strong	Yes
D13	Overcast	Hot	Normal	Weak	Yes
D14	Rain	Mild	High	Strong	No

Slide CS472 – Machine Learning 23

Characteristics of Tests

Let $|P| = 20$, $|N| = 20$

A Boolean test splits the data into two subsets, U_1 and U_2

The best test: $U_1 = P$ and $U_2 = N$

The worst test: $U_1 = \frac{1}{2}P + \frac{1}{2}N$ and $U_2 = \frac{1}{2}P + \frac{1}{2}N$

Slide CS472 – Machine Learning 24

Information Gain

average disorder =

$$\sum_{b=1}^{nbranches} \frac{n_b}{n_t} * Disorder(b)$$

average disorder =

$$\sum_{b=1}^{nbranches} \frac{n_b}{n_t} * \left(\sum_c^{nclasses} -\frac{n_{bc}}{n_b} \log_2\left(\frac{n_{bc}}{n_b}\right) \right)$$

n_b is the number of instances in branch b

n_t is the total number of instances

n_{bc} is the number of instances in branch b of class c



Slide CS472 – Machine Learning 25

Disorder Term

$$Disorder = \left(\sum_c^{nclasses} -\frac{n_{bc}}{n_b} \log_2\left(\frac{n_{bc}}{n_b}\right) \right)$$

Average disorder =

$$\sum_{b=1}^{nbranches} \frac{n_b}{n_t} * disorder(b)$$



Slide CS472 – Machine Learning 26

Calculation for Attribute Humidity

branch	value	n_{bp}	n_{bn}	disorder
1	high	3	4	.99
2	normal	6	1	.58

$$\text{Disorder}(\text{high}) = -\frac{3}{7}\log_2\left(\frac{3}{7}\right) - \frac{4}{7}\log_2\left(\frac{4}{7}\right) = .99$$

$$\text{Disorder}(\text{normal}) = -\frac{6}{7}\log_2\left(\frac{6}{7}\right) - \frac{1}{7}\log_2\left(\frac{1}{7}\right) = .58$$

Average Disorder of Humidity =

$$\frac{7}{14}\text{Disorder}(\text{high}) + \frac{7}{14}\text{Disorder}(\text{normal}) =$$

$$\frac{7}{14}(.99) + \frac{7}{14}(.58) = .79$$

Slide CS472 – Machine Learning 27

Selection of Attribute

Attribute	Average Disorder
outlook	0.69
temperature	0.91
humidity	0.79
windy	0.89

Slide CS472 – Machine Learning 28

Information Gain and Entropy

- S is a sample of training examples
- p is the proportion of positive examples in S
- n is the proportion of negative examples in S
- Entropy (our *Disorder*) measures the impurity of S

$$Entropy(S) \equiv -p \log_2 p - n \log_2 n$$

Information Gain measures the expected reduction in entropy caused by partitioning the examples according to attribute A .

$$Gain(S, A) = Entropy(S) - \sum_{v \in Values(A)} \frac{|S_v|}{|S|} Entropy(S_v)$$

Slide CS472 – Machine Learning 29

Decision Trees

Goal: Construct a decision tree that agrees (is consistent) with the training set.

Trivial solution: construct a decision tree that has one path to a leaf for every example.

Problem with trivial solution?

Non-trivial solution: find a concise decision tree that agrees with the training data.

Slide CS472 – Machine Learning 30

Appropriate Problems for Decision Tree Learning

- Instances represented by attribute-value pairs
- Target function has a discrete number of output values
- Disjunctive descriptions may be required

Slide CS472 – Machine Learning 31

Practical Uses of Decision Trees

1. Making credit decisions for Am-Ex UK
2. Automated sky object classification and cataloguing
3. Gas-oil separation (BP) [Michie, 1986].
4. Automatic pilot [Sammut *et al.*, 1992]

Slide CS472 – Machine Learning 32

Decision Trees on Real Problems

Must consider the following issues:

1. Assessing the performance of a learning algorithm
2. Inadequate attributes (problem across all ML algorithms)
3. Noise in the data
4. Missing values
5. Attributes with numeric values
6. Bias in attribute selection

Slide CS472 – Machine Learning 33

Assessing the performance of a learning algorithm

Performance task: predict the classifications of unseen examples

Assessing prediction quality after tree construction: check the classifier's predictions on a **test set**.

But this requires that we get more data after we have trained.


Slide CS472 – Machine Learning 34

Test Methodology

1. Collect a large set of examples
2. Divide it into two disjoint sets: the **training set** and the **test set**
3. Use the learning algorithm with the training set to generate a hypothesis H
4. Measure the percentage of examples in the test set that are classified correctly by H
5. Repeat steps 1 to 4 for different sizes of training sets and different randomly selected training sets of each size.

Slide CS472 – Machine Learning 35

Learning Curve

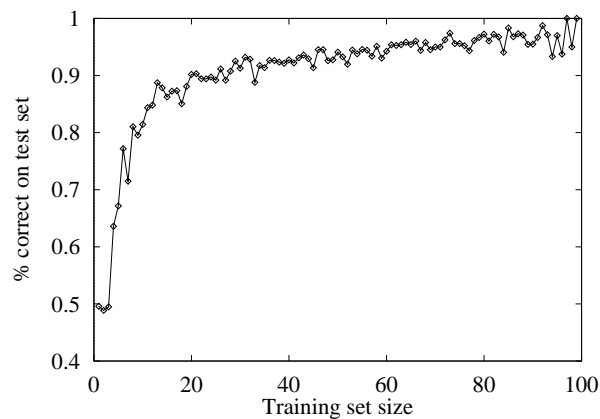

Slide CS472 – Machine Learning 36

Inadequate Attributes

- Cause inconsistent instances (rare in real-world data)
- Lead to larger decision trees as more splits are required

Slide CS472 – Machine Learning 37

Noisy Data

Incorrect attribute values. Incorrect in class labels.

Noise can be caused by many factors, such as:

1. Faulty measurements
2. Ill-defined thresholds
3. Subjective interpretation

A further complication: may or may not know whether data is noisy.

Slide CS472 – Machine Learning 38

An Example of Noisy Data

Task: Diagnosing Alzheimer's disease

Data: Patient records describe age, results of various tests, etc.

Example Object:

(Age=10, T1=0.345, ..., Class=HasDisease)

Either the value of Age is incorrect or the Class label is incorrect.

Slide CS472 – Machine Learning 39

The Real World: Dealing with Noise

Inconsistent examples cause the decision tree algorithm to fail to find a tree *consistent* with all training examples.

Solutions:

1. have each leaf node report the majority class
2. have each leaf report the estimated probabilities of each classification using the relative frequencies

Slide CS472 – Machine Learning 40

The Real World: Dealing with Noise – Part II

Algorithm may choose to test **irrelevant attributes**

Example: goal is to predict whether a coin toss will come up heads or tails using the attributes: month, time (night, day), coin type (nickel, dime, ...)

What is the resulting decision tree?

What would be the best decision tree?

Slide CS472 – Machine Learning 41

Dealing with Noise: The Problem of Overfitting

Definition: finding meaningless “regularity” in the data

This problem is general to all learning algorithms

Solution for decision trees: decide that testing further attributes will not improve predictive accuracy of the decision tree (called pruning).

Slide CS472 – Machine Learning 42

Unknown Attribute Values

1. Throw away instances during training; during testing, try all paths, letting leaves vote.
2. Take class average.
3. Take class average observed at node.
4. Build another classifier to fill in the missing value.

Slide CS472 – Machine Learning 43

Bias in Attribute Selection

Problem: Metric chooses higher branching attributes

Solution: Take into account the branching factor

Slide CS472 – Machine Learning 44

Attributes with Numeric Values

Look for best splits.

1. Sort values
2. Create Boolean vars out of mid points
3. Evaluate all of these using information gain formula
4. Do once or at every leaf?

Slide CS472 – Machine Learning 45

Representational Restrictions

Just consider boolean concept learning.

Concept description:

$$((a_i = v_{a_i}) \wedge (a_j = v_{a_j}) \wedge (a_k = v_{a_k}) \wedge \dots) \vee$$

$$((a_i = v_{a_x}) \wedge (a_m = v_{a_y}) \wedge (a_n = v_{a_n}) \wedge \dots) \vee \dots$$

Problems:

- *Inefficient representation for some functions.*
- *Can't test two features simultaneously.*

Slide CS472 – Machine Learning 46

Learning as Search

Search through a space of *concept descriptions*


H is the set of concept descriptions considered by the ML algorithm. ML algorithm believes:

$$H_1 \vee H_2 \vee H_3 \vee \dots H_n$$

The H_i can be partially ordered according to their generality. Search can proceed from general \rightarrow specific, or specific \rightarrow general.

Slide CS472 – Machine Learning 47

ID3 as Search

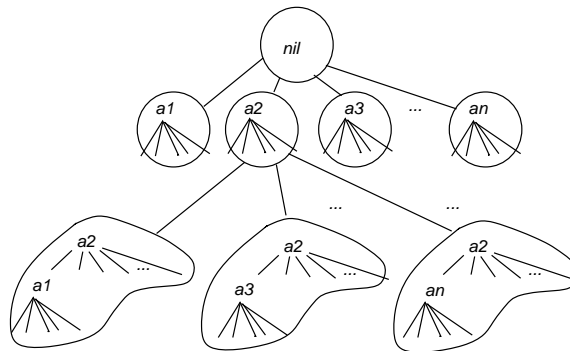

Slide CS472 – Machine Learning 48

Direction of search: general \rightarrow specific? or specific \rightarrow general?

Operators: data-driven? or model-driven?

Data-driven methods require new instances as input.

Model driven methods use other knowledge to move through hypothesis space.

Control strategy: DFS? BFS? best-first search?

Processing of Data: incremental? nonincremental/batch?