

CS 665 Advanced Interactive Rendering

Fall 2004
Kavita Bala
Computer Science
Cornell University

Information

- Instructor: Kavita Bala kb@cs.cornell.edu
- AA: Cindy Robinson cindy@cs.cornell.edu
- Tue and Thu 10:10-11:25
 - Moving location Rhodes 484
 - Instead of Phillips 219

© Kavita Bala, Computer Science, Cornell University

What is this course about

- What does image generation mean?
 - Physics of light
- How to generate images?
 - Global illumination algorithms
- How do we do this efficiently?
 - Interactive rendering, data structures, image-based rendering etc.




RTGI, Program of Computer Graphics

© Kavita Bala, Computer Science, Cornell University

Physics of light

- What is light?
- How does it behave?
 - Does it bend?
- What effects are visible due to different behaviors of light?
 - Polarization, interference, ...
- Radiometry



© Kavita Bala, Computer Science, Cornell University

Materials

- How does light interact with materials?



© Kavita Bala, Computer Science, Cornell University


How do we generate images?

- How does light propagate in 3D?
- Rendering Equation: mathematical formulation of global illumination problem

© Kavita Bala, Computer Science, Cornell University

Global Illumination

- GI algorithms solve the rendering equation
- Generate 2D image from 3D scene

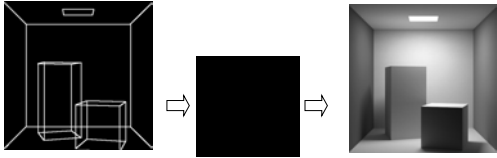

Emission (light sources)
BRDFs (materials)
Geometry (objects)

Global Illumination

© Kavita Bala, Computer Science, Cornell University

Global Illumination

- Ray tracing (Whitted)
- Radiosity (Finite Element)
- Monte Carlo rendering

© Kavita Bala, Computer Science, Cornell University

Classic Ray Tracing

- Introduced in 1980 by Turner Whitted
- First global illumination algorithm
- Many advances through the 80s
- Widely available in commercial and public-domain software
 - Rayshade, Radiance

© Kavita Bala, Computer Science, Cornell University

Ray tracing



© Kavita Bala, Computer Science, Cornell University

Classic Radiosity

- Introduced in 1984
- Diffuse inter-reflections
- Widely available
 - Lightscape

© Kavita Bala, Computer Science, Cornell University

Radiosity Pictures




© Kavita Bala, Computer Science, Cornell University

Advanced Global Illumination

- Classic ray tracing and classic radiosity are basic building blocks
- More realistic materials than just perfect specular / diffuse
- We want **accurate** solutions

© Kavita Bala, Computer Science, Cornell University

Global Solutions

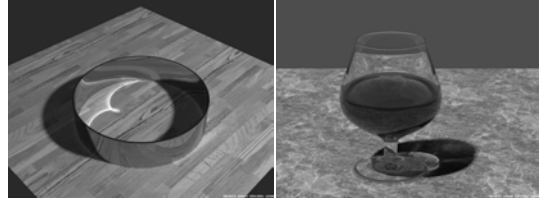

© Kavita Bala, Computer Science, Cornell University



Complexity

- How do we handle complexity?
 - Many objects
 - Many lights
 - Complex BRDFs
 - Global illumination
 - Dynamic scenes

© Kavita Bala, Computer Science, Cornell University

Acceleration Structures

- Octrees, kd-trees, bounding volume hierarchies, BSP trees



© Kavita Bala, Computer Science, Cornell University


Fast Rendering



© Kavita Bala, Computer Science, Cornell University

Intelligent Sampling

- Edge and Point Rendering

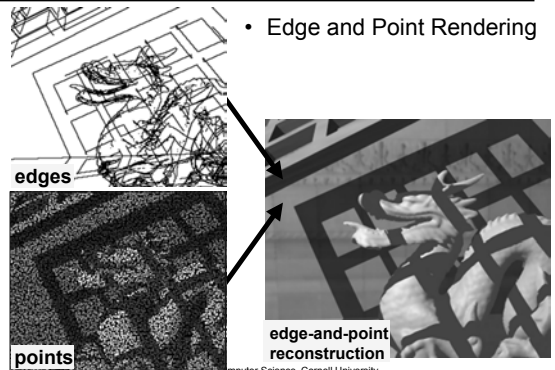

© Kavita Bala, Computer Science, Cornell University


Dynamic Scenes



a) Before changes b) After changes c) Higher resolution


© Kavita Bala, Computer Science, Cornell University

Hardware Rendering

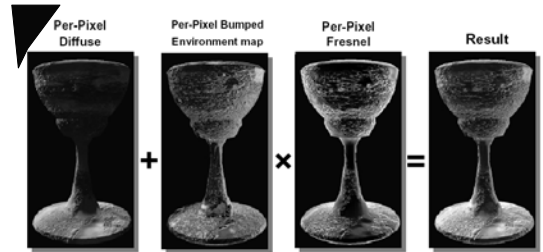

© Kavita Bala, Computer Science, Cornell University

Shadows



Fernando, Fernandez, Bala, Greenberg [SIG01]
© Kavita Bala, Computer Science, Cornell University

Shadows




Figure 7: Comparison of the Stanford Bunny with shadow maps (left), penumbra maps with two different sized lights (center), and a pathtraced shadow using the larger light (right). For this data set, we generate shadows using a 10k polygon model and render the shadows onto the full (~70k polygon) model.




Figure 8: Using a standard shadow map results in hard shadows (left), add a penumbra map to get soft shadows (right). Using a 10k polygon dragon model for the shadows and a 50k polygon model to render, we get 14.3 fps at 1024x1024.

Display the image ...

- GI computes radiance. How to display radiance to user?
- How to transform radiometric units to RGB screen values?
- Model the **Human Visual System (HVS)**

© Kavita Bala, Computer Science, Cornell University

Realistic image display



- The tone reproduction problem

© Kavita Bala, Computer Science, Cornell University

Modeling visual adaptation

10,000:1 dynamic range



before
linear mapping

after
visual mapping

© Kavita Bala, Computer Science, Cornell University

Perceptually-based rendering

Understanding the human visual system
to *decide what is important to render*




Stuart Little, Dreamworks, 1999
© Kavita Bala, Computer Science, Cornell University

Complexity

- How do we handle complexity?
 - Many objects
 - Many lights
 - Complex BRDFs
 - Global illumination
 - Dynamic scenes

© Kavita Bala, Computer Science, Cornell University

NPR

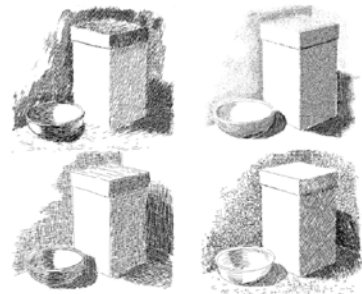

© Kavita Bala, Computer Science, Cornell University

Image-Based Rendering

- Use photographs to capture complex scenes



© Kavita Bala, Computer Science, Cornell University

By the end of the course...

Fundamental understanding of:

- Algorithms for generating images
 - Photorealistic and NPR
- Efficient techniques for high-quality rendering

© Kavita Bala, Computer Science, Cornell University

Pre-requisites

- An introductory graphics course
- Talk to me if you have not taken the Cornell introductory courses

© Kavita Bala, Computer Science, Cornell University

Administration

- 3-4 assignments
 - Written exercises
 - Programming assignments
- Final project
 - Groups?
- Focus on understanding concepts
- 1 mid-term

© Kavita Bala, Computer Science, Cornell University

Academic Integrity

- Can work in groups
- Don't copy from Web

© Kavita Bala, Computer Science, Cornell University

Books

- Advanced Global Illumination
 - Dutre, Bekaert, Bala
 - Rendering
 - Monte Carlo techniques
 - Current areas



© Kavita Bala, Computer Science, Cornell University

Information

- www.cs.cornell.edu/courses/cs665/2004fa/
 - Tentative schedule
 - Homeworks, lecture notes, will be on-line
 - Check for updates and announcements


© Kavita Bala, Computer Science, Cornell University

Questions?

© Kavita Bala, Computer Science, Cornell University

Traditional Graphics Pipeline

- Modeling Transformation
 - World space transformations
- Lighting
 - Local shading model
- Rasterize pixels
- Interpolate color/depth/etc.
- Z-buffer for hidden surface elimination



© Kavita Bala, Computer Science, Cornell University

Shading Model

$$I(x, y) = \sum_{i=1}^{N_{lights}} (k_d(N.L) + k_s(N.H)^n) V_i + I_a$$


diffuse specular ambient

- Illumination at surface equals
 - Ambient + Diffuse + Specular highlights
- With programmable GPUs
 - Can have arbitrary shading model

© Kavita Bala, Computer Science, Cornell University

But what about other cues?

- Lighting: Shadows
- Lighting: Shading
 - Glossy
 - Transparency
- Color bleeding



© Kavita Bala, Computer Science, Cornell University


Classic Ray Tracing

- Introduced in 1980 by Turner Whitted
- Existing rendering:
 - Phong shading
 - Local illumination (specular, diffuse)

© Kavita Bala, Computer Science, Cornell University

Insights

- Trace rays from eye into scene
 - Backward ray tracing
- Find visible objects
- Shade visible points
 - Shadows
 - Reflections
 - Refractions




Whitted 1980: First ray traced image

- First global illumination algorithm!

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - View Setup


- Synthetic camera defined by “eye point” and “view plane” in world coordinates
- View plane divided into pixels corresponding to the image dimensions

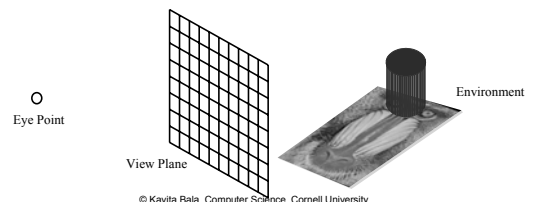

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - View Rays


- Rays are cast from the eye point through each pixel in the image

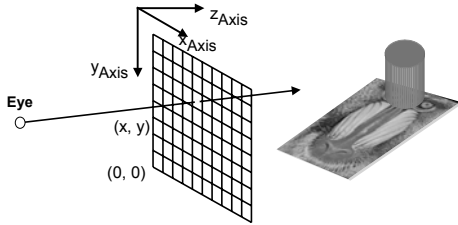

© Kavita Bala, Computer Science, Cornell University

Visibility Determination


- Intersect eye ray with all objects in scene
 - Find closest object
 - Z-buffer was existing algorithm
- No intersection? Show background color



© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - Shadows


- Cast ray from the surface point to each light source: shadow rays

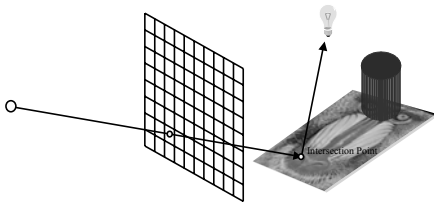

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - Shadows, cont.


- Shadow ray is blocked = shadow

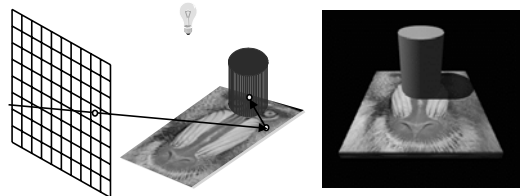

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm – Shadow Rays


- If shadow ray not blocked, calculate radiance based on shading model

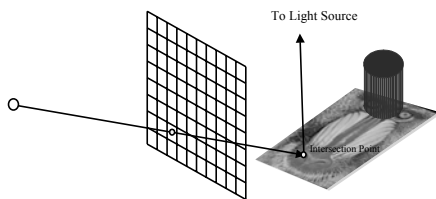

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - Reflections


- If object specular, shoot secondary reflected rays

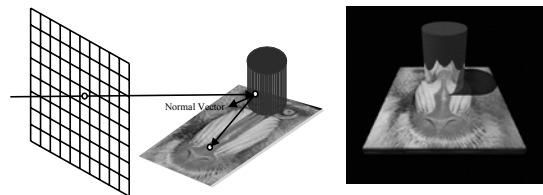

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - Refractions

- If object transparent, shoot secondary refracted rays

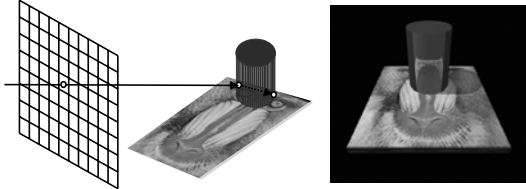

© Kavita Bala, Computer Science, Cornell University

Whitted RT Shading Model

$$I(x, y) = \sum_{i=1}^{N_{\text{lights}}} (k_d(N.L) + k_s(N.H)^n) V_i + I_a + k_r I_r + k_t I_t$$

diffuse specular
ambient reflected refracted

- Illumination at surface equals
 - Ambient + Diffuse + Specular highlights +
 - Secondary specular reflections and transmissions
- Equivalent to Blinn-Phong plus contributions from specularly reflected and transmitted rays

© Kavita Bala, Computer Science, Cornell University

High-level algorithm

```

For each pixel (x,y) {
    eye ray e = ray through pixel (x,y)
    color of pixel (x,y) = Trace (e, scene)
}
Trace (Ray eyeray, Scene scene) {
    o = intersect (eyeray, scene)
    if (o != null) {
        Shade (o, p, N, scene, e,...)
    } else return background color
}
    
```

© Kavita Bala, Computer Science, Cornell University

Shade



```

Shade (Object o, Point pt, Normal N, Scene scene,
Ray ray, ...) {
    for each light {
        if (!intersect (shadowray, scene))
            color += diffuse+specular // not in shadow
    }
    if (o.specular) color += k_s Trace (reflected ray)
    if (o.transparent) color += k_t Trace (refracted ray)
}
    
```

© Kavita Bala, Computer Science, Cornell University

Basic Algorithm - Recursion

- Reflected and/or transmitted recursively spawn more rays
 - Ray tree
- Depth cutoff
- Weight cutoff



© Kavita Bala, Computer Science, Cornell University

Classic Ray Tracing

- Image-based
- Gathering approach
 - from the light sources (direct illumination)
 - from the reflected direction (perfect specular)
 - from the refracted direction (perfect specular)
- All other contributions are ignored!
 - Not a complete solution

© Kavita Bala, Computer Science, Cornell University

Whitted RT Assumptions

- Light Source: point light source
 - Hard shadows
 - Single shadow ray direction
- Material: Blinn-Phong model
 - Diffuse with specular peak
- Light Propagation
 - Occluding objects
 - Specular interreflections only
 - trace rays in mirror reflection direction only

© Kavita Bala, Computer Science, Cornell University

History

- Problems with classic ray tracing:
 - Not realistic: only perfect specular and perfect refraction/reflection between surfaces
 - View-dependent
- Radiosity (1984)
 - Global Illumination in diffuse scenes
 - Discretize scene
- Monte Carlo Ray Tracing (1986)
 - Global Illumination for any environment

© Kavita Bala, Computer Science, Cornell University