

- Previous Lecture:
  - Working with images
- Today's Lecture:
  - Characters and strings
- Announcement:
  - Project 4 due Mon 10/26 at 11pm

# Characters & strings

- We have used strings already:
  - `n= input('Next number: ')`
  - `printf('Answer is %d', ans)`
- A string is made up of individual characters, so a string is a 1-d array of characters
- `'CS1112 rocks!'` is a character array of length 13; it has 7 letters, 4 digits, 1 space, and 1 symbol.

\	C	^	S	^	1	^	1	^	1	^	2	^		^	r	^	o	^	c	^	k	^	s	^	!	'
---	---	---	---	---	---	---	---	---	---	---	---	---	--	---	---	---	---	---	---	---	---	---	---	---	---	---

- Can have 2-d array of characters as well

\	C	^	S	^	1	^	1	^	1	^	2	'
\	r	^	o	^	c	^	k	^	s	^	!	'

2×6 matrix

# Matlab types: `char`, `double`, `uint8`, `logical`

There is not a type "string"! What we call a "string" is a 1-d array of chars

```
a = 'c^s^1'
```

```
b = [3 9]
```

```
c = uint8(b)
```

```
d = rand > .5
```

**a** is a 1-d array with type `char` components. We call **a** a "string" or "char array"

**b** is a 1-d array with type `double` components. `double` is the default type for numbers in Matlab. We call **b** a "numeric array"

**c** is a 1-d array with type `uint8` components. We call **c** a "uint8 array"

**d** is a scalar of the type `logical`. We call **d** a "boolean value"

## Strings are important in computation

Numerical data is often encoded in strings. E.g., a file containing Ithaca weather data begins with the string

**W07629N4226**

meaning

Longitude: **76° 29' West**

Latitude: **42° 26' North**

We may need to grab hold of the substring **W07629**, convert **076** and **29** to the numeric values 76 and 29, and do some computation

Comparison of genomic sequences is another example of string computation

- E.g., looking for a pattern:

Given the sequence **ATTCTGACCTCGATC...**

Look for the pattern **ACCT**

- E.g., quantifying the difference between sequences:

**ATTCTGACCTCGATC**

**ATTCGTGACCTCGAT**

*What if this nucleotide is removed?*

# Single quotes enclose strings in Matlab

Anything enclosed in single quotes is a string (even if it looks like something else)

- `'100'` is a character array (string) of length 3
- `100` is a numeric value
- `'pi'` is a character array of length 2
- `pi` is the built-in constant 3.1416...
- `'x'` is a character (vector of length 1)
- `x` may be a variable name in your program

# Strings are vectors

## Vectors

- Assignment  
`v = [7 0 5];`
- Indexing  
`x = v(3); % x is 5`  
`v(1) = 1; % v is [1 0 5]`  
`w = v(2:3); % w is [0 5]`
- : notation  
`v = 2:5; % v is [2 3 4 5]`
- Appending  
`v = [7 0 5];`  
`v(4) = 2; % v is [7 0 5 2]`
- Concatenation  
`v = [v [4 6]];`  
`% v is [7 0 5 2 4 6]`

## Strings

- Assignment  
`s = 'hello';`
- Indexing  
`c = s(2); % c is 'e'`  
`s(1) = 'J'; % s is 'Jello'`  
`t = s(2:4); % t is 'ell'`
- : notation  
`s = 'a':'g'; % s is 'abcdefg'`
- Appending  
`s = 'duck';`  
`s(5) = 's'; % s is 'ducks'`
- Concatenation  
`s = [s 'quack'];`  
`% s is 'ducks quack'`

## Some useful string functions

```
str= 'Cs 1112';
```

```
length(str)      % 7  
isletter(str)    % [1 1 0 0 0 0 0]  
isspace(str)     % [0 0 1 0 0 0 0]  
lower(str)       % 'cs 1112'  
upper(str)       % 'CS 1112'
```

```
ischar(str)
```

```
    % Is str a char array? True (1)
```

```
strcmp(str(1:2), 'cs')
```

```
    % Compare strings str(1:2) & 'cs'. False (0)
```

```
strcmp(str(1:3), 'CS')
```

```
    % False (0)
```

## Example: capitalize 1<sup>st</sup> letter

Write a function to capitalize the first letter of each word in a string. Assume that the string has lower case letters and blanks only. (OK to use built-in function **upper**)

```
function [str, nCaps] = caps(str)
```

```
% Post: Capitalize first letter of each word.
```

```
% str = partially capitalized string
```

```
% nCaps = no. of capital letters
```

```
% Pre: str = string with lower case letters & blanks only
```

```
look for the spaces
```



```
Look For The Spaces
```

See caps.m

# The ASCII Table

Char	Dec	Oct	Hex	Char	Dec	Oct	Hex	Char	Dec	Oct	Hex	Char	Dec	Oct	Hex
(nul)	0	0000	0x00	(sp)	32	0040	0x20	@	64	0100	0x40	~	96	0140	0x60
(soh)	1	0001	0x01	!	33	0041	0x21	A	65	0101	0x41	a	97	0141	0x61
(stx)	2	0002	0x02	"	34	0042	0x22	B	66	0102	0x42	b	98	0142	0x62
(etx)	3	0003	0x03	#	35	0043	0x23	C	67	0103	0x43	c	99	0143	0x63
(eot)	4	0004	0x04	\$	36	0044	0x24	D	68	0104	0x44	d	100	0144	0x64
(enq)	5	0005	0x05	%	37	0045	0x25	E	69	0105	0x45	e	101	0145	0x65
(ack)	6	0006	0x06	&	38	0046	0x26	F	70	0106	0x46	f	102	0146	0x66
(bel)	7	0007	0x07	'	39	0047	0x27	G	71	0107	0x47	g	103	0147	0x67
(bs)	8	0010	0x08	(	40	0050	0x28	H	72	0110	0x48	h	104	0150	0x68
(ht)	9	0011	0x09	)	41	0051	0x29	I	73	0111	0x49	i	105	0151	0x69
(nl)	10	0012	0x0a	*	42	0052	0x2a	J	74	0112	0x4a	j	106	0152	0x6a
(vt)	11	0013	0x0b	+	43	0053	0x2b	K	75	0113	0x4b	k	107	0153	0x6b
(np)	12	0014	0x0c	,	44	0054	0x2c	L	76	0114	0x4c	l	108	0154	0x6c
(cr)	13	0015	0x0d	-	45	0055	0x2d	M	77	0115	0x4d	m	109	0155	0x6d
(so)	14	0016	0x0e	.	46	0056	0x2e	N	78	0116	0x4e	n	110	0156	0x6e
(si)	15	0017	0x0f	/	47	0057	0x2f	O	79	0117	0x4f	o	111	0157	0x6f
(dle)	16	0020	0x10	0	48	0060	0x30	P	80	0120	0x50	p	112	0160	0x70
(dc1)	17	0021	0x11	1	49	0061	0x31	Q	81	0121	0x51	q	113	0161	0x71
(dc2)	18	0022	0x12	2	50	0062	0x32	R	82	0122	0x52	r	114	0162	0x72
(dc3)	19	0023	0x13	3	51	0063	0x33	S	83	0123	0x53	s	115	0163	0x73
(dc4)	20	0024	0x14	4	52	0064	0x34	T	84	0124	0x54	t	116	0164	0x74
(nak)	21	0025	0x15	5	53	0065	0x35	U	85	0125	0x55	u	117	0165	0x75
(syn)	22	0026	0x16	6	54	0066	0x36	V	86	0126	0x56	v	118	0166	0x76
(etb)	23	0027	0x17	7	55	0067	0x37	W	87	0127	0x57	w	119	0167	0x77
(can)	24	0030	0x18	8	56	0070	0x38	X	88	0130	0x58	x	120	0170	0x78
(em)	25	0031	0x19	9	57	0071	0x39	Y	89	0131	0x59	y	121	0171	0x79
(sub)	26	0032	0x1a	:	58	0072	0x3a	Z	90	0132	0x5a	z	122	0172	0x7a
(esc)	27	0033	0x1b	;	59	0073	0x3b	[	91	0133	0x5b	{	123	0173	0x7b
(fs)	28	0034	0x1c	<	60	0074	0x3c	\	92	0134	0x5c		124	0174	0x7c
(gs)	29	0035	0x1d	=	61	0075	0x3d	]	93	0135	0x5d	}	125	0175	0x7d
(rs)	30	0036	0x1e	>	62	0076	0x3e	^	94	0136	0x5e	~	126	0176	0x7e
(us)	31	0037	0x1f	?	63	0077	0x3f	_	95	0137	0x5f	(del)	127	0177	0x7f

## Character vs ASCII code

```
str= 'Age 19'
```

```
    %a 1-d array of characters
```

```
code= double(str)
```

```
    %convert chars to ascii values
```

```
str1= char(code)
```

```
    %convert ascii values to chars
```

# Arithmetic and relational ops on characters

- `'c' - 'a'` gives 2
- `'6' - '5'` gives 1
- `letter1 = 'e'; letter2 = 'f';`
- `letter1 - letter2` gives -1
  
- `'c' > 'a'` gives true
- `letter1 == letter2` gives false
  
- `'A' + 2` gives 67
- `char('A' + 2)` gives 'C'

What is in variable `g` (if it gets created)?

```
d1= 'Mar 3';   d2= 'Mar 9';  
x1= d1(5);    x2= d2(5);  
g= x2-x1;
```

A: the character '6'

B: the numeric value 6

C: Error in assigning variables `x1`, `x2`

D: Error in the subtraction operation

E: Some other value or error

What is in variable `g` (if it gets created)?

```
d1= 'Mar 13';   d2= 'Mar 29';  
x1= d1(5:6);   x2= d2(5:6);  
g= x2-x1;
```

A: the string '16'

B: the numeric value 16

C: Error in assigning variables `x1`, `x2`


D: Error in the subtraction operation

E: Some other value or error

## Example: toUpper

Write a function `toUpper(char)` to convert character `cha` to upper case if `cha` is a lower case letter. Return the converted letter. If `cha` is not a lower case letter, simply return the character `cha`.

**Hint:** Think about the **distance** between a letter and the base letter 'a' (or 'A'). E.g.,

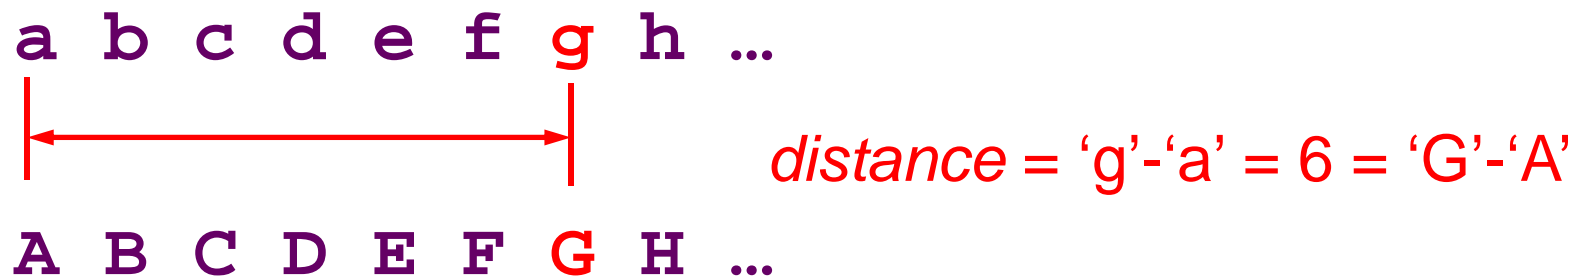

Of course, do not use Matlab function `upper`!

```
function up = toUpper(char)
% up is the upper case of character cha.
% If cha is not a letter then up is just cha.
```

```
function up = toUpper(char)
% up is the upper case of character cha.
% If cha is not a letter then up is just cha.

up= cha;
```

*cha is lower case if it is between 'a' and 'z'*

```
function up = toUpper(char)
% up is the upper case of character char.
% If char is not a letter then up is just char.

up= char;

if ( char >= 'a' && char <= 'z' )

    % Find distance of char from 'a'

end
```

```
function up = toUpper(char)
% up is the upper case of character cha.
% If cha is not a letter then up is just cha.

up= cha;

if ( cha >= 'a' && cha <= 'z' )

    % Find distance of cha from 'a'
    offset= cha - 'a';

    % Go same distance from 'A'

end
```

```
function up = toUpper(char)
% up is the upper case of character cha.
% If cha is not a letter then up is just cha.

up= cha;

if ( cha >= 'a' && cha <= 'z' )

    % Find distance of cha from 'a'
    offset= cha - 'a';

    % Go same distance from 'A'
    up= char('A' + offset);
end
```

## Example: removing all occurrences of a character

- From a genome bank we get a sequence

ATTG CCG TA GCTA CGTACGC AACTGG  
AAATGGC CGTAT...

- First step is to “clean it up” by removing all the blanks. Write this function:

```
function s = removeChar(c, s)
% Return string s with all occurrences
% of character c removed
```

## Example: removing all occurrences of a character

Can solve this problem using iteration—check one character (one component of the vector) at a time

```
function s = removeChar_loop(c, s)
% Return string s with all occurrences of
% character c removed.
```

## Example: removing all occurrences of a character

Can solve this problem using iteration—check one character (one component of the vector) at a time

```
function s = removeChar_loop(c, s)
% Return string s with all occurrences of
% character c removed.

t= '';
for k= 1:length(s)

end
s= t;
```

## Example: removing all occurrences of a character

Can solve this problem using iteration—check one character (one component of the vector) at a time

```
function s = removeChar_loop(c, s)
% Return string s with all occurrences of
% character c removed.

t= '';
for k= 1:length(s)
    if s(k)~=c
        t= [t s(k)];
    end
end
s= t;
```