




The name on the tab can be any name

When you draw a folder, put any name you want here, as long as each folder has a unique name.

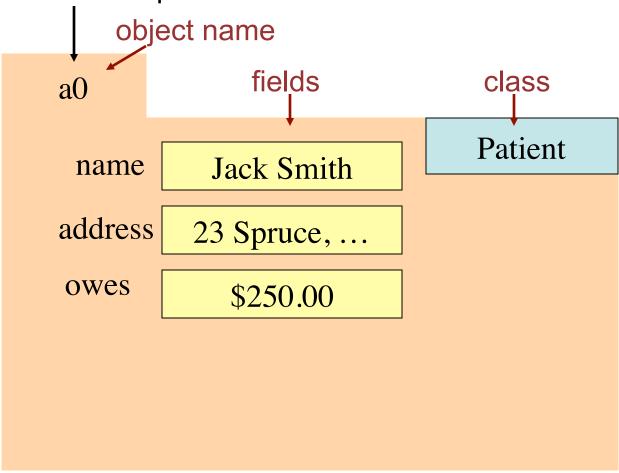

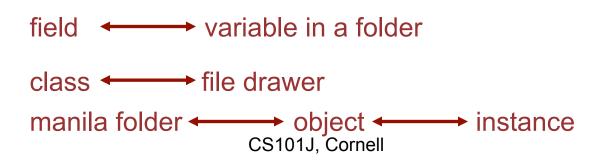

Folders contain instructions

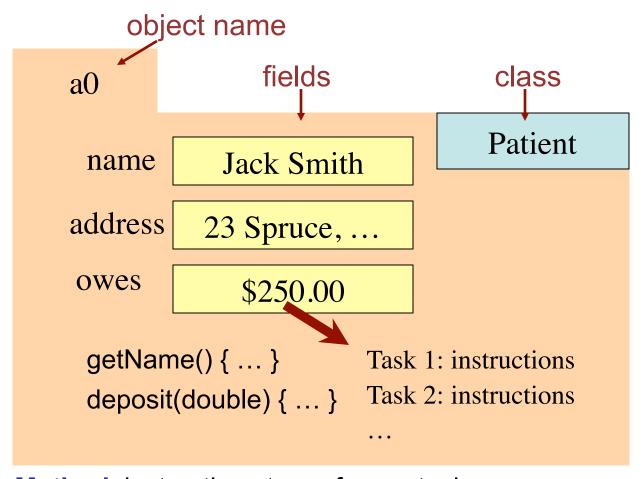

Method: instructions to perform a task

function: produces a value

procedure: does something, does not

produce a value

variables in folders ← → fields

class ← → file drawer

manila folder ← → object ← → instance

CS101J, Cornell