

Assemblers, Linkers, and Loaders

Anne Bracy

CS 3410


Computer Science

Cornell University

The slides are the product of many rounds of teaching CS 3410 by Professors Weatherspoon, Bala, Bracy, McKee, and Sirer.

See: P&H Appendix A1-2, A.3-4 and 2.12

From Writing to Running

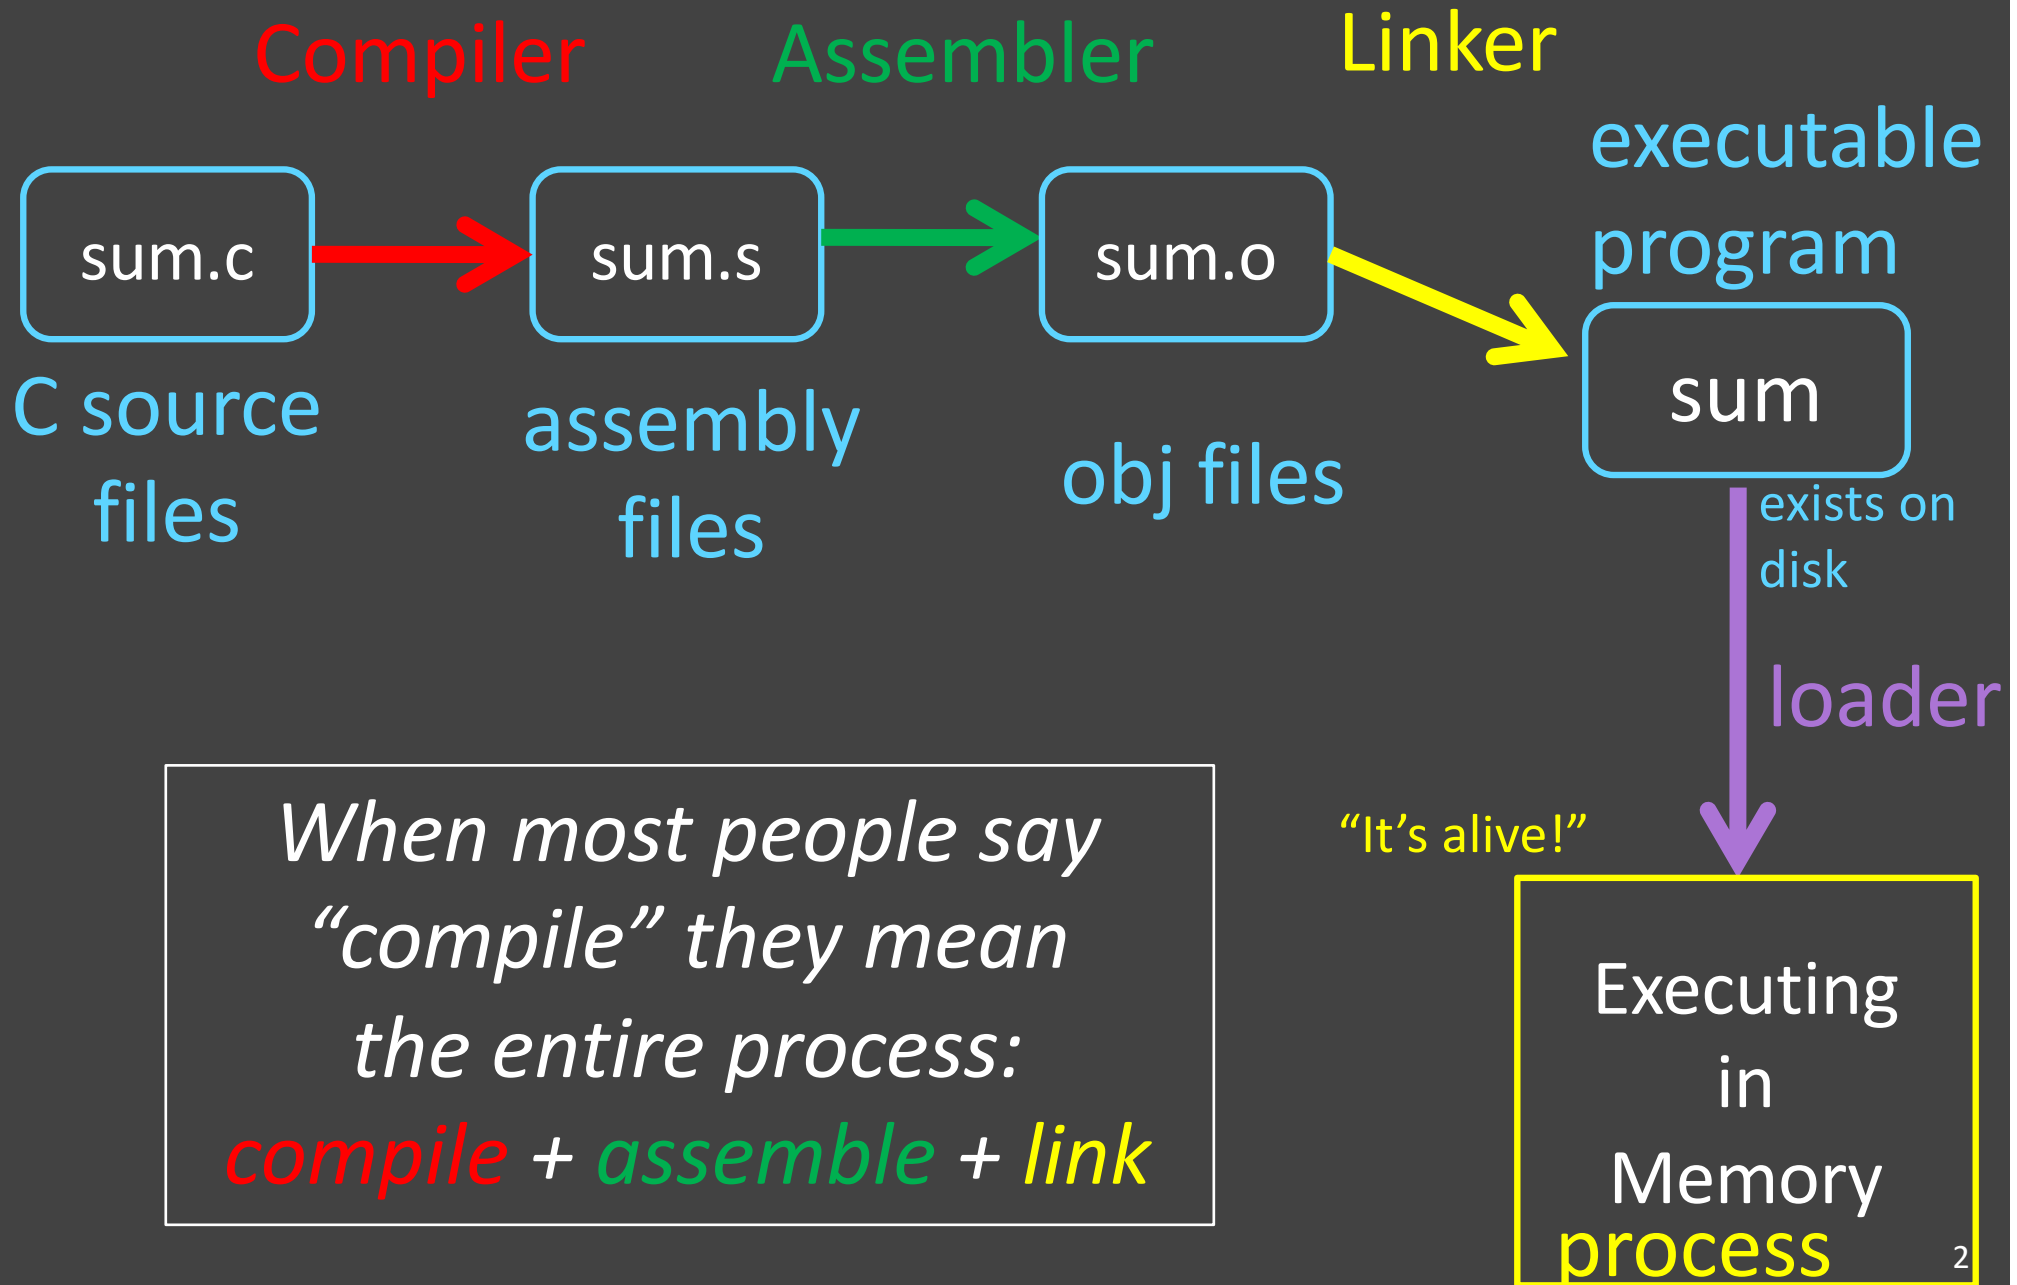

sum.c

```
#include <stdio.h>

int n = 100;

int main (int argc, char* argv[ ]) {
    int i;
    int m = n;
    int sum = 0;
    for (i = 1; i <= m; i++) {
        sum += i;
    }
    printf ("Sum 1 to %d is %d\n", n, sum);
}
```

csug03> mipsel-linux-gcc -S sum.c

export PATH=\${PATH}:/courses/cs3410/mipsel-linux/bin:/courses/cs3410/mips-sim/bin
or

setenv PATH \${PATH}:/courses/cs3410/mipsel-linux/bin:/courses/cs3410/mips-sim/bin

tells compiler to
produce **sum.s** file

From Writing to Running: Command Line

Compile

```
csug01> mipsel-linux-gcc -S sum.c
```

Assemble

```
csug01> mipsel-linux-gcc -c sum.s
```

Link

```
csug01> mipsel-linux-gcc -o sum sum.o ${LINKFLAGS}  
# -nostartfiles -nodefaultlibs  
# -static -mno-xgot -mno-embedded-pic  
-mno-abicalls -G 0 -DMIPS -Wall
```

Load

```
csug01> simulate sum
```

```
Sum 1 to 100 is 5050
```

```
MIPS program exits with status 0 (approx. 2007  
instructions in 143000 nsec at 14.14034 MHz)
```

sum.s

```
.data
.globl n
.align 2
n: .word 100
.rdata
.align 2
$str0: .asciiz
      "Sum 1 to %d is %d\n"
.text
.align 2
.globl main
main: addiu $sp,$sp,-48
      sw $31,44($sp)
      sw $fp,40($sp)
      move $fp,$sp
      sw $4,48($fp)
      sw $5,52($fp)
      la $2,n
      lw $2,0($2)
      sw $2,28($fp)
      sw $0,32($fp)
      li $2,1
      sw $2,24($fp)
```

```
$L2: lw $2,24($fp)
      lw $3,28($fp)
      slt $2,$3,$2
      bne $2,$0,$L3
      lw $3,32($fp)
      lw $2,24($fp)
      addu $2,$3,$2
      sw $2,32($fp)
      lw $2,24($fp)
      addiu $2,$2,1
      sw $2,24($fp)
      b $L2
$L3: la $4,$str0
      lw $5,28($fp)
      lw $6,32($fp)
      jal printf
      move $sp,$fp
      lw $31,44($sp)
      lw $fp,40($sp)
      addiu $sp,$sp,48
      j $31
```

sum.s

```

.data
.globl n
.align 2
n: .word 100
.rdata
.align 2
$str0: .asciiz
      "Sum 1 to %d is %d\n"
.text
.align 2
.globl main
main:
prologue {
    addiu $sp,$sp,-48
    sw    $31,44($sp)
    sw    $fp,40($sp)
    move  $fp,$sp
    sw    $a0,$4,48($fp)
    sw    $a1,$5,52($fp)
    la    $v0,$2,n
    lw    $2,0($2) $v0=100
    sw    $2,28($fp) m=100
    sw    $0,32($fp) sum=0
    li    $2,1
    sw    $2,24($fp) i=1
}

$L2: lw    $2,24($fp) i=1
     lw    $3,28($fp) m=100
     slt   $2,$3,$2 if(m < i)
     bne   $2,$0,$L3 100 < 1
     lw    $3,32($fp) v1=0(sum)
     lw    $2,24($fp) v0=1(i)
     addu   $2,$3,$2 v0=1(0+1)
     sw    $2,32($fp) sum=1
     lw    $2,24($fp) i=1
     addiu  $2,$2,1 i=2 (1+1)
     sw    $2,24($fp) i=2
     b     $L2

$L3: call printf {
    la    $a0,$4,$str0 str
    lw    $a1,$5,28($fp) m=100
    lw    $a2,$6,32($fp) sum
    jal   printf
    move  $sp,$fp
    lw    $31,44($sp)
    lw    $fp,40($sp)
    addiu $sp,$sp,48
    j     $31
}
    
```

Assembler

Input: Assembly File (.s)

- assembly instructions, pseudo-instructions
- program data (strings, variables), layout directives

Output: Object File in binary machine code

MIPS instructions in executable form

(.o file in Unix, .obj in Windows)

```
addi r5, r0, 10  
mulr r5, r5, 2  
addi r5, r5, 15
```



```
00100000000000010100000000000001010  
0000000000000001010010100001000000  
001000001010010100000000000001111
```

MIPS Assembly Instructions

Arithmetic/Logical

- ADD, ADDU, SUB, SUBU, AND, OR, XOR, NOR, SLT, SLTU
- ADDI, ADDIU, ANDI, ORI, XORI, LUI, SLL, SRL, SLLV, SRLV, SRAV, SLTI, SLTIU
- MULT, DIV, MFLO, MTLO, MFHI, MTHI

Memory Access

- LW, LH, LB, LHU, LBU, LWL, LWR
- SW, SH, SB, SWL, SWR

Control flow

- BEQ, BNE, BLEZ, BLTZ, BGEZ, BGTZ
- J, JR, JAL, JALR, BEQL, BNEL, BLEZL, BGTZL

Special

- LL, SC, SYSCALL, BREAK, SYNC, COPROC

Pseudo-Instructions

Assembly shorthand, technically not machine instructions, but easily converted into 1+ instructions that are

Pseudo-Insns	Actual Insns	Functionality
NOP	SLL r0, r0, 0	# do nothing
MOVE reg, reg	ADD r2, r0, r1	# copy between regs
LI reg, 0x45678	LUI reg, 0x4 ORI reg, reg, 0x5678	#load immediate
BLT reg, reg, label	SLT r1, rA, rB BNE r1, r0, label	# branch less than

+ a few more...

math.c

Symbols and References

```
int pi = 3;
int e = 2;
static int randomval = 7;

(external == defined in another file)
extern char *username;
extern int printf(char *str, ...);

int square(int x) { ... }
static int is_prime(int x) { ... }
int pick_prime() { ... }
int pick_random() {
    return randomval;
}
```

Global labels: Externally visible “exported” symbols

- Can be referenced from other object files
- Exported functions, global variables
- **Examples:** pi, e, username, printf, pick_prime, pick_random

Local labels: Internally visible only symbols

- Only used within this object file
- static functions, static variables, loop labels, ...
- **Examples:** randomval, is_prime

Handling forward references

Example:

bne \$1, \$2, **L**

Looking for L

sll \$0, \$0, 0

L: addiu \$2, \$3, 0x2

Found L

The assembler will change this to

bne \$1, \$2, **+1**

sll \$0, \$0, 0

addiu \$2, \$3, \$0x2

Final machine code

0X1422000**1** # bne

00010100001000100000000000000001

0x00000000 # sll

00000000000000000000000000000000

0x24620002 # addiu

00100100011000100000000000000010

Object file

Header

- Size and position of pieces of file

Text Segment

- instructions

Data Segment

- static data (local/global vars, strings, constants)

Debugging Information

- line number → code address map, *etc.*

Symbol Table

- External (exported) references
- Unresolved (imported) references

Object File

Object File Formats

Unix

- a.out
- COFF: Common Object File Format
- ELF: Executable and Linking Format
- ...

Windows

- PE: Portable Executable

All support both executable and object files

Objdump disassembly

```
csug01> mipsel-linux-objdump --disassemble math.o
```

```
math.o:      file format elf32-tradlittlemips
```

Disassembly of section .text:

00000000 <pick_random>:

0:	27bdfff8	addiu	sp,sp,-8
4:	afbe0000	sw	s8,0(sp)
8:	03a0f021	move	s8,sp
c:	3c020000	lui	v0,0x0
10:	8c420008	lw	v0,8(v0)
14:	03c0e821	move	sp,s8
18:	8fbe0000	lw	s8,0(sp)
1c:	27bd0008	addiu	sp,sp,8
20:	03e00008	jr	ra
24:	00000000	nop	

prologue

body

epilogue

unresolved symbol
(see symbol table
next slide)

```
static int randomval = 7;
```

```
int pick_random() { return randomval; }
```

Objdump symbols

```
csug01 ~$ mipsel-linux-objdump --syms math.o
math.o:      file format elf32-tradlittlemips
```

[F]unction
[0]bject
[1]ocal
[g]lobal

SYMBOL TABLE:		<i>segment</i>	<i>segment size</i>
00000000	1	df *ABS*	00000000 math.c
00000000	1	d .text	00000000 .text
00000000	1	d .data	00000000 .data
00000000	1	d .bss	00000000 .bss
00000000	1	d .mdebug.abi32	00000000 .mdebug.abi32
00000008	1	0 .data	00000004 randomval
00000060	1	F .text	00000028 is_prime
00000000	1	d .rodata	00000000 .rodata
00000000	1	d .comment	00000000 .comment
00000000	g	0 .data	00000004 pi
00000004	g	0 .data	00000004 e
00000000	g	F .text	00000028 pick_random
00000028	g	F .text	00000038 square
00000088	g	F .text	0000004c pick_prime
00000000		*UND*	00000000 username
00000000		*UND*	00000000 printf

← static local
function @
address 0x60
Size = x28 bytes



external references (undefined)

Separate Compilation & Assembly

Compiler

Assembler

Linker

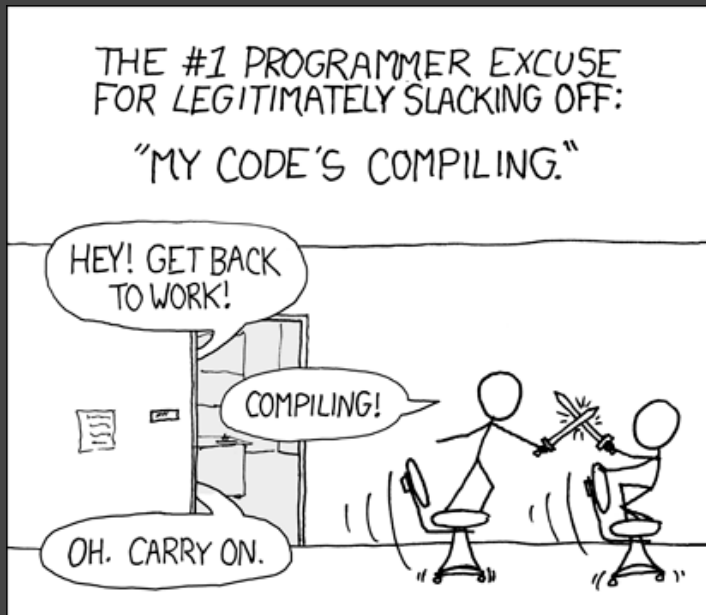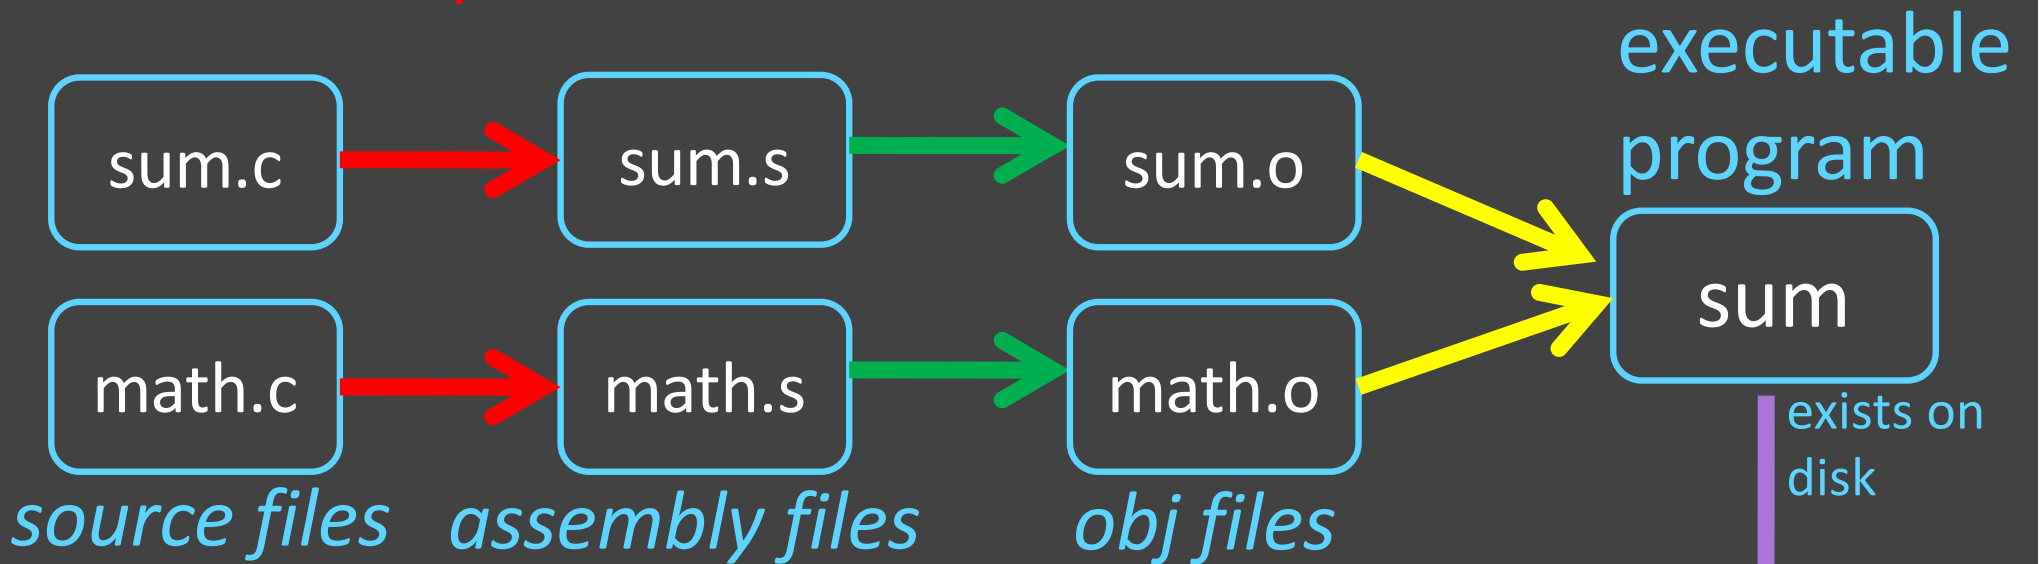

<http://xkcd.com/303/>

small change ?
→ recompile one module only

Executing in Memory process

Linkers

Linker combines object files into an executable file

- Resolve as-yet-unresolved symbols
- Each has illusion of own address space
 - Relocate each object's text and data segments
- Record top-level entry point in executable file

End result: a program on disk, ready to execute

- E.g.

<code>./sum</code>	Linux
<code>./sum.exe</code>	Windows
<code>simulate sum</code>	Class MIPS simulator

Static Libraries

Static Library: Collection of object files
(think: like a zip archive)

Q: Every program contains the entire library?!?

A: No, Linker picks only object files needed to resolve undefined references at link time

e.g. `libc.a` contains many objects:

- `printf.o`, `fprintf.o`, `vprintf.o`, `sprintf.o`, `snprintf.o`, ...
- `read.o`, `write.o`, `open.o`, `close.o`, `mkdir.o`, `readdir.o`, ...
- `rand.o`, `exit.o`, `sleep.o`, `time.o`,

Linker Example: Resolving an External Fn Call

main.o

40 0C000000★
44 21035000
48 1b80050C
4C 8C040000
50 21047002
54 0C000000★
...

00 T main
00 D usr
UND printf
UND pi
UND square

40,JAL, printf
...
54,JAL, square

math.o

24 21032040
28 0C000000★
2C 1b301402
30 3C040000
34 34040000
...

20 T square
00 D pi
UND printf
UND usr

28,JAL, printf

printf.o

...

3C T printf

sum.exe

0040 0000 ...
21032040
0C40023C JAL printf
1b301402
3C041000
34040004
...
0040 0100 0C40023C JAL printf
21035000
1b80050c
8C048004
21047002
0C400020 JAL square
...
0040 0200 printf 10201000
21040330
22500102
...

1000 0000
...
.data

Entry:0040 0100
text:0040 0000
data:1000 0000

Relocation info Symbol table

★ JAL printf → JAL ???
Unresolved references to
printf and square

iClicker Question

main.o	
.text	...
	40 0C000000
	44 21035000
	48 1b80050C
	4C 8C040000
	50 21047002
	54 0C000000
	...
	00 T main
	00 D usr
Relocation info	*UND* printf
	UND pi
	UND square
	40,JAL, printf
	4C,LW/gp, pi
Symbol table	
54,JAL, square	

math.o	
	...
	24 21032040
	28 0C000000
	2C 1b301402
	30 3C040000
	34 34040000
	...
	20 T square
	00 D pi
	UND printf
	UND usr
	28,JAL, printf
	30,LUI, usr
	34,LA, usr

Which symbols are undefined according to both main.o and math.o's symbol table?

- A) printf
- B) pi
- C) square
- D) usr
- E) printf & pi

Linker Example: Resolving Global Variables (1)

main.o

```

...
40 0C000000
44 21035000
48 1b80050C
4C 8C040000 ★
50 21047002
54 0C000000
...
    
```

```

00 T    main
00 D    usr
*UND*  printf
*UND*  pi
*UND*  square
    
```

```

40,JAL, printf
4C,LW/gp, pi
54,JAL, square
    
```

math.o

```

...
24 21032040
28 0C000000
2C 1b301402
30 3C040000
34 34040000
...
    
```

```

20 T    square
00 D    pi
*UND*  printf
*UND*  usr
    
```

```

28,JAL, printf
30,LUI, usr
34,LA,  usr
    
```

sum.exe

0040 0000

```

...
21032040
0C40023C
1b301402
3C041000
34040004
    
```

0040 0100

```

...
0C40023C
21035000
1b80050c
8C048004
21047002
0C400020
    
```

0040 0200

```

...
10201000
21040330
22500102
...
    
```

1000 0000

```

pi 00000003
    
```

```

Entry:0040 0100
text:0040 0000
data:1000 0000
    
```

★ LW \$4 "pi" → LW \$4 ???
Unresolved reference to pi

Linker Example: Resolving Global Variables (2)

main.o

```

...
40 0C000000
44 21035000
48 1b80050C
4C 8C040000
50 21047002
54 0C000000
...

```

```

00 T    main
00 D    usr
*UND*  printf
*UND*  pi
*UND*  square

```

```

40,JAL, printf
4C,LW/gp, pi
54,JAL, square

```

math.o

```

...
24 21032040
28 0C000000
2C 1b301402
30 3C040000★
34 34040000★
...

```

```

20 T    square
00 D    pi
*UND*  printf
*UND*  usr

```

```

28,JAL, printf
30,LUI,  usr
34,LA,   usr

```

sum.exe

```

...
21032040
0C40023C
1b301402
3C041000
34040004

```

LA num:
LUI 1000
ORI 0004

```

...
0C40023C
21035000
1b80050c
8C048004
21047002
0C400020

```

```

...
10201000
21040330
22500102
...

```

```

pi 00000003
usr 0077616B

```

```

Entry:0040 0100
text:0040 0000
data:1000 0000

```

Relocation info Symbol table


Notice: usr gets
relocated due to
collision with pi

★ LA = LUI/ORI "usr" → ???
Unresolved reference to usr

Compiler

Assembler

Linker

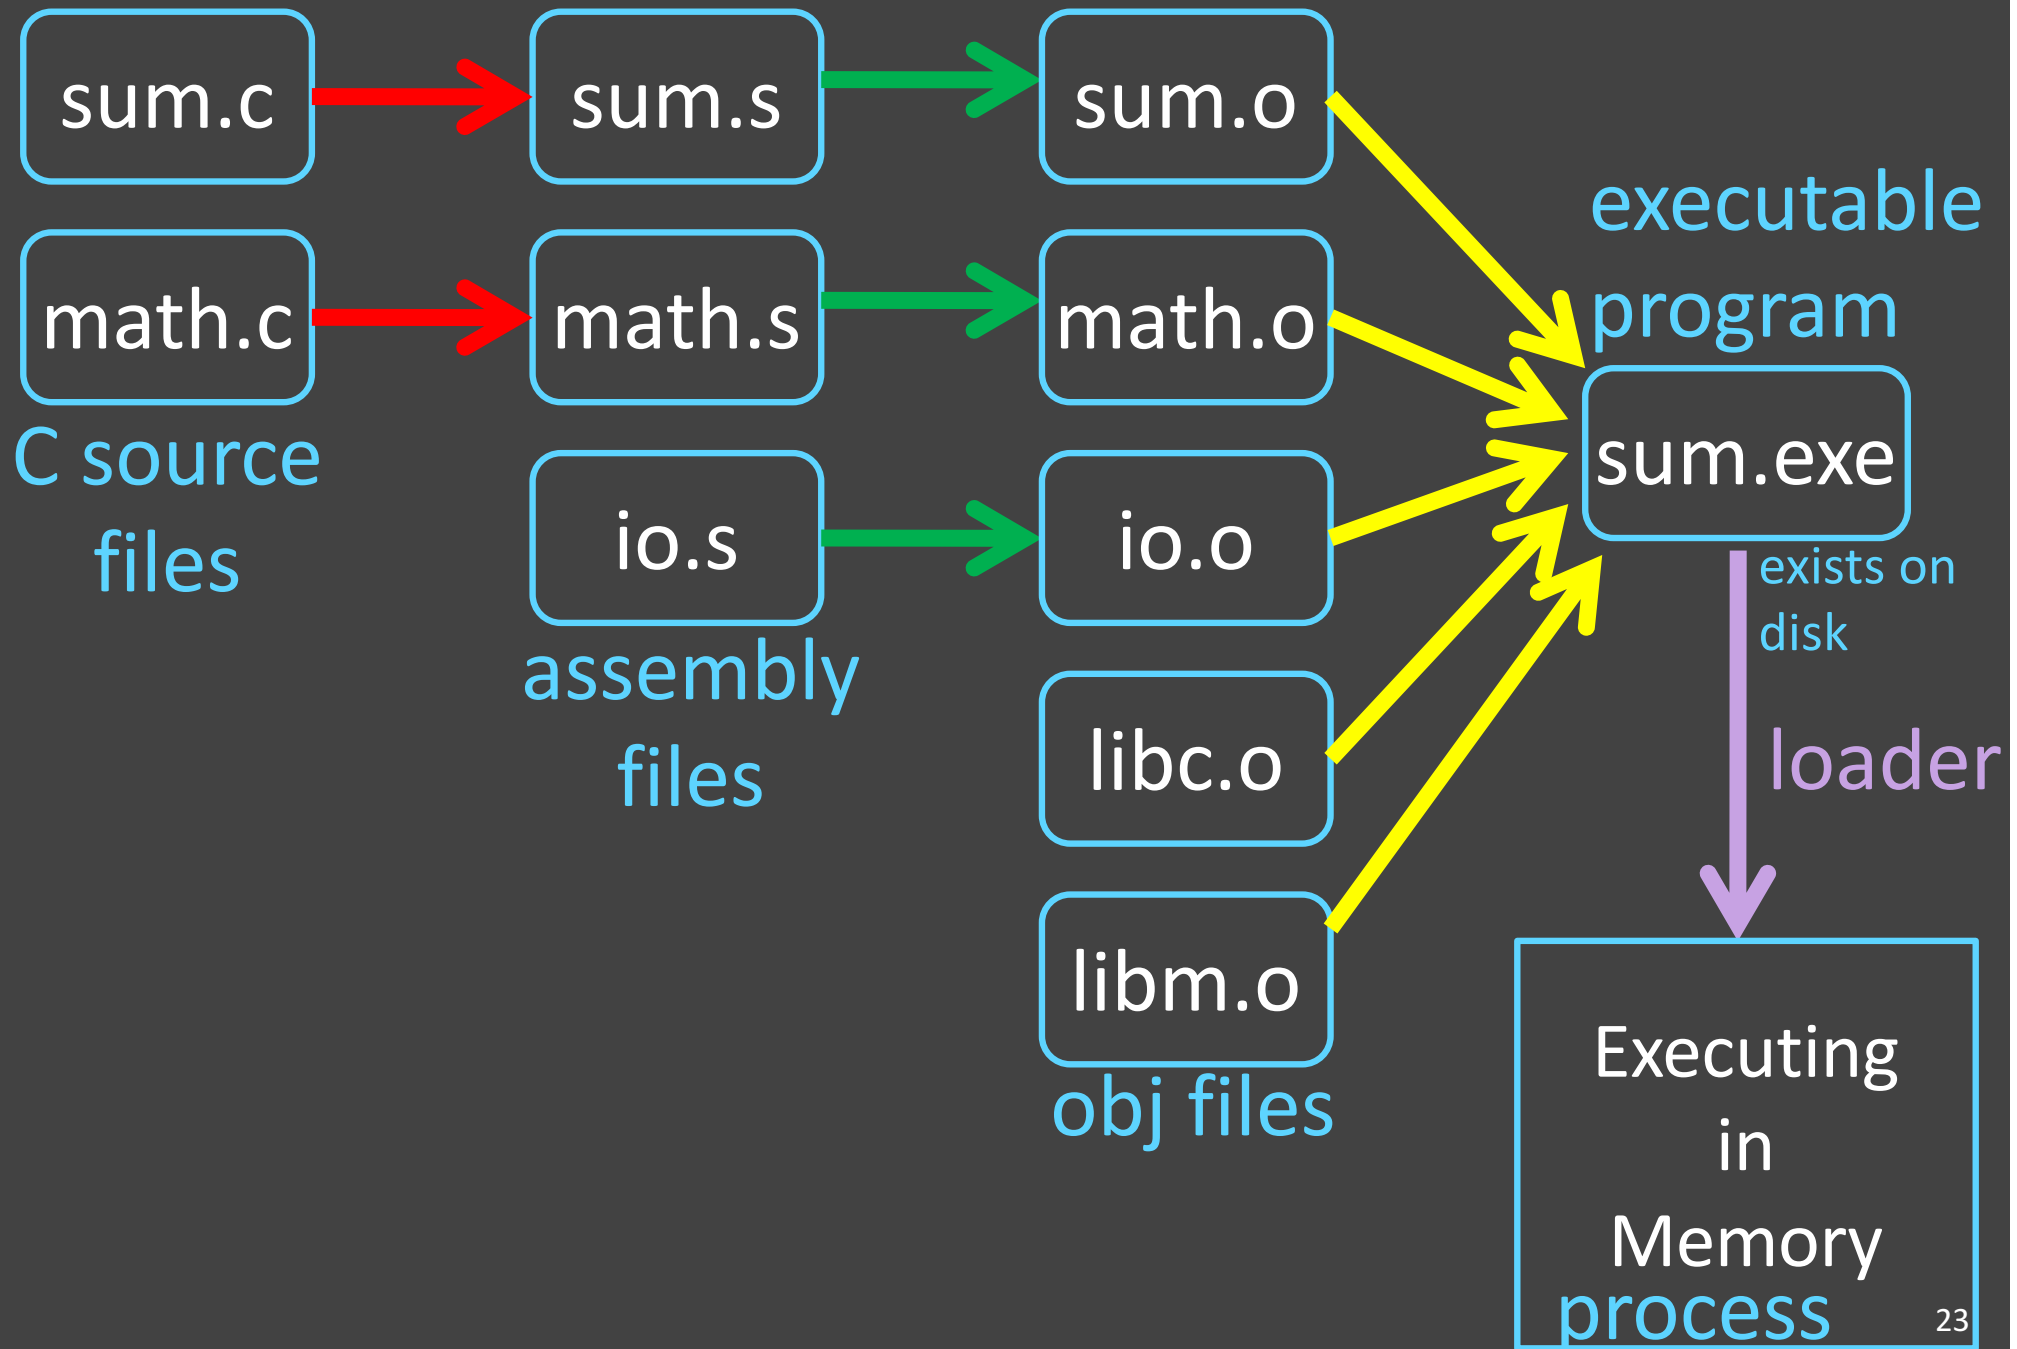

Loaders

Loader reads executable from disk into memory

- Initializes registers, stack, arguments to first function
- Jumps to entry-point

Part of the Operating System (OS)

Shared Libraries

Q: Every program contains parts of same library?!?

A: No, they can use shared libraries

- Executables all point to single *shared library* on disk
- final linking (and relocations) done by the loader

Optimizations:

- Library compiled at fixed non-zero address
- Jump table in each program instead of relocations
- Can even patch jumps on-the-fly

Static and Dynamic Linking

Static linking

- Big executable files (all/most of needed libraries inside)
- Don't benefit from updates to library
- No load-time linking

Dynamic linking

- Small executable files (just point to shared library)
- Library update benefits all programs that use it
- Load-time cost to do final linking
 - But dll code is probably already in memory
 - And can do the linking incrementally, on-demand

Takeaway

Compiler produces assembly files

- (contain MIPS assembly, pseudo-instructions, directives, etc.)

Assembler produces object files

- (contain MIPS machine code, missing symbols, some layout information, etc.)

Linker joins object files into one executable file

- (contains MIPS machine code, no missing symbols, some layout information)

Loader puts program into memory, jumps to 1st insn, and starts executing a *process*

- (machine code)