

Assemblers, Linkers, and Loaders

Anne Bracy

CS 3410


Computer Science

Cornell University

The slides are the product of many rounds of teaching CS 3410 by Professors Weatherspoon, Bala, Bracy, McKee, and Sirer.

See: P&H Appendix A1-2, A.3-4 and 2.12

From Writing to Running

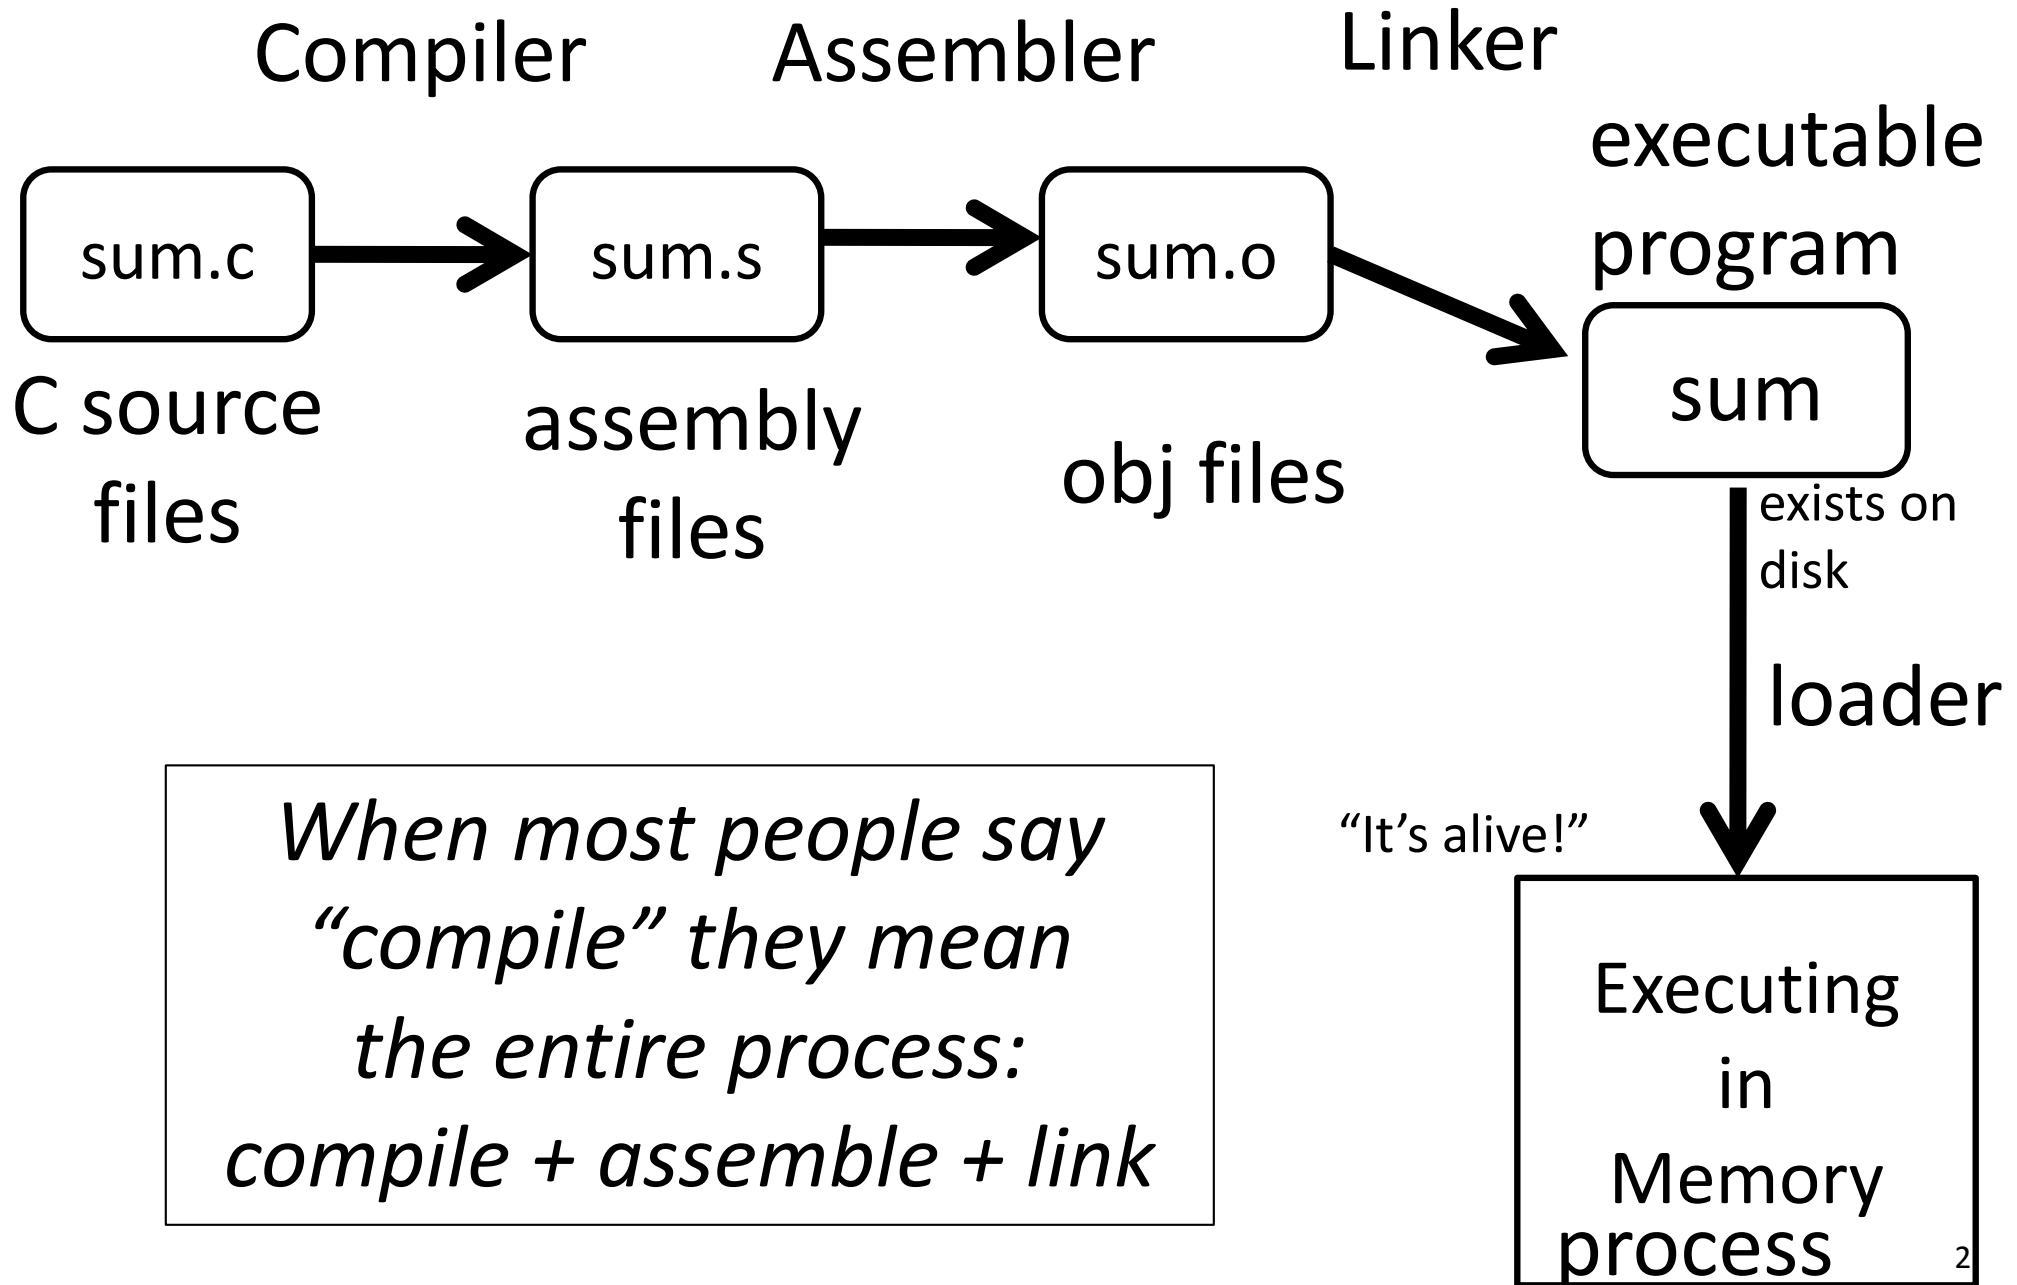

sum.c

```
#include <stdio.h>

int n = 100;

int main (int argc, char* argv[ ]) {
    int i;
    int m = n;
    int sum = 0;
    for (i = 1; i <= m; i++) {
        sum += i;
    }
    printf ("Sum 1 to %d is %d\n", n, sum);
}
```

csug03> mipsel-linux-gcc -S sum.c

export PATH=\${PATH}:/courses/cs3410/mipsel-linux/bin:/courses/cs3410/mips-sim/bin

or

setenv PATH \${PATH}:/courses/cs3410/mipsel-linux/bin:/courses/cs3410/mips-sim/bin

tells compiler to
produce sum.s file

From Writing to Running: Command Line

Compile

```
csug01> mipsel-linux-gcc -S sum.c
```

Assemble

```
csug01> mipsel-linux-gcc -c sum.s
```

Link

```
csug01> mipsel-linux-gcc -o sum sum.o ${LINKFLAGS}
```

```
# -nostartfiles -nodefaultlibs
```

```
# -static -mno-xgot -mno-embedded-pic
```

```
-mno-abicalls -G 0 -DMIPS -Wall
```

Load

```
csug01> simulate sum
```

```
Sum 1 to 100 is 5050
```

```
MIPS program exits with status 0 (approx. 2007
```

```
instructions in 143000 nsec at 14.14034 MHz)
```

sum.s

```

.data
.globl n
.align 2
n: .word 100
.rdata
.align 2
$str0: .asciiz
      "Sum 1 to %d is %d\n"
.text
.align 2
.globl main
main: addiu $sp,$sp,-48
      sw $31,44($sp)
      sw $fp,40($sp)
      move $fp,$sp
      sw $4,48($fp)
      sw $5,52($fp)
      la $2,n
      lw $2,0($2)
      sw $2,28($fp)
      sw $0,32($fp)
      li $2,1
      sw $2,24($fp)

$L2: lw $2,24($fp)
      lw $3,28($fp)
      slt $2,$3,$2
      bne $2,$0,$L3
      lw $3,32($fp)
      lw $2,24($fp)
      addu $2,$3,$2
      sw $2,32($fp)
      lw $2,24($fp)
      addiu $2,$2,1
      sw $2,24($fp)
      b $L2

$L3: la $4,$str0
      lw $5,28($fp)
      lw $6,32($fp)
      jal printf
      move $sp,$fp
      lw $31,44($sp)
      lw $fp,40($sp)
      addiu $sp,$sp,48
      j $31

```

sum.s

```

.data
.globl n
.align 2
n: .word 100
.rdata
.align 2
$str0: .asciiz
        "Sum 1 to %d is %d\n"
.text
.align 2
.globl main
main:
prologue {
    addiu $sp,$sp,-48
    sw    $31,44($sp)
    sw    $fp,40($sp)
    move  $fp,$sp
    sw    $a0,$4,48($fp)
    sw    $a1,$5,52($fp)
    la    $v0,$2,n
    lw    $2,0($2) $v0=100
    sw    $2,28($fp) m=100
    sw    $0,32($fp) sum=0
    li    $2,1
    sw    $2,24($fp) i=1
}

$L2:
    lw    $2,24($fp) i=1
    lw    $3,28($fp) m=100
    slt   $2,$3,$2 if(m < i)
    bne   $2,$0,$L3 100 < 1
    lw    $3,32($fp) v1=0(sum)
    lw    $2,24($fp) v0=1(i)
    addu   $2,$3,$2 v0=1(0+1)
    sw    $2,32($fp) sum=1
    lw    $2,24($fp) i=1
    addiu  $2,$2,1 i=2 (1+1)
    sw    $2,24($fp) i=2
    b     $L2

$L3:
    la    $a0,$4,$str0 str
    call  $a1,$5,28($fp) m=100
    printf $a2,$6,32($fp)sum
    jal   printf
    move  $sp,$fp
    lw    $31,44($sp)
    lw    $fp,40($sp)
    addiu $sp,$sp,48
    j     $31
    epilogue {
}

```

Assembler

Input: Assembly File (.s)


- assembly instructions, pseudo-instructions
- program data (strings, variables), layout directives

Output: Object File in binary machine code

MIPS instructions in executable form

(.o file in Unix, .obj in Windows)

```
addi r5, r0, 10  
mulr r5, r5, 2  
addi r5, r5, 15
```



```
00100000000000010100000000000001010  
0000000000000001010010100001000000  
0010000010100101000000000000001111
```

MIPS Assembly Instructions

Arithmetic/Logical

- ADD, ADDU, SUB, SUBU, AND, OR, XOR, NOR, SLT, SLTU
- ADDI, ADDIU, ANDI, ORI, XORI, LUI, SLL, SRL, SLLV, SRLV, SRAV, SLTI, SLTIU
- MULT, DIV, MFLO, MTLO, MFHI, MTHI

Memory Access

- LW, LH, LB, LHU, LBU, LWL, LWR
- SW, SH, SB, SWL, SWR

Control flow

- BEQ, BNE, BLEZ, BLTZ, BGEZ, BGTZ
- J, JR, JAL, JALR, BEQL, BNEL, BLEZL, BGTZL

Special

- LL, SC, SYSCALL, BREAK, SYNC, COPROC

Pseudo-Instructions

Assembly shorthand, technically not machine instructions, but easily converted into 1+ instructions that are

Pseudo-Insns	Actual Insns	Functionality
NOP	SLL r0, r0, 0	# do nothing
MOVE reg, reg	ADD r2, r0, r1	# copy between regs
LI reg, 0x45678	LUI reg, 0x4 ORI reg, reg, 0x5678	#load immediate
BLT reg, reg, label	SLT r1, rA, rB BNE r1, r0, label	# branch less than

+ a few more...

math.c

Symbols and References

```
int pi = 3;
int e = 2;
static int randomval = 7;
    (external == defined in another file)
extern int usrid;
extern int printf(char *str, ...);

int square(int x) { ... }
static int is_prime(int x) { ... }
int pick_prime() { ... }
int pick_random() {
    return usrid;
}
```

Global labels: Externally visible “exported” symbols

- Can be referenced from other object files
- Exported functions, global variables
- Examples: pi, e, username, printf, pick_prime, pick_random

Local labels: Internally visible only symbols

- Only used within this object file
- static functions, static variables, loop labels, ...
- Examples: randomval, is_prime

Handling forward references

Example:

bne \$1, \$2, L

Looking for L

sll \$0, \$0, 0

L: addiu \$2, \$3, 0x2

Found L

The assembler will change this to

bne \$1, \$2, +1

sll \$0, \$0, 0

addiu \$2, \$3, \$0x2

Final machine code

0X14220001 # bne

000101000010001000000000000000000000000001

0x00000000 # sll

00

0x24620002 # addiu

001001000110001000000000000000000000000010

Object file

Header

- Size and position of pieces of file

Text Segment

- instructions

Data Segment

- static data (local/global vars, strings, constants)

Debugging Information

- line number → code address map, *etc.*

Symbol Table

- External (exported) references
- Unresolved (imported) references

Object File

Object File Formats

Unix

- a.out
- COFF: Common Object File Format
- ELF: Executable and Linking Format
- ...

Windows

- PE: Portable Executable

All support both executable and object files

Objdump disassembly

```
csug01> mipsel-linux-objdump --disassemble math.o
```

```
math.o:      file format elf32-tradlittlemips
```

Disassembly of section .text:

00000000 <pick_random>:

0:	27bdfff8	addiu	sp,sp,-8	} <i>prologue</i>	← unresolved symbol (see symbol table next slide)
4:	afbe0000	sw	s8,0(sp)		
8:	03a0f021	move	s8,sp		
c:	3c020000	lui	v0,0x0	} <i>body</i>	
10:	8c420008	lw	v0,8(v0)		
14:	03c0e821	move	sp,s8	} <i>epilogue</i>	
18:	8fbe0000	lw	s8,0(sp)		
1c:	27bd0008	addiu	sp,sp,8		
20:	03e00008	jr	ra		
24:	00000000	nop			

```
static int usr = 41;
```

```
int pick_random() { return usr; }
```

Objdump symbols

```
csug01 ~$ mipsel-linux-objdump --syms math.o
math.o:      file format elf32-tradlittlemips
```

[F]unction
[0]bject
[1]ocal
[g]lobal

SYMBOL TABLE:		<i>segment</i>	<i>size</i>	
00000000	1	df	*ABS*	00000000 math.c
00000000	1	d	.text	00000000 .text
00000000	1	d	.data	00000000 .data
00000000	1	d	.bss	00000000 .bss
00000000	1	d	.mdebug.abi32	00000000 .mdebug.abi32
00000008	1	0	.data	00000004 randomval

00000060	1	F	.text	00000028 is_prime	static local
00000000	1	d	.rodata	00000000 .rodata	function @
00000000	1	d	.comment	00000000 .comment	address 0x60
00000000	g	0	.data	00000004 pi	Size = x28 bytes
00000004	g	0	.data	00000004 e	
00000000	g	F	.text	00000028 pick_random	
00000028	g	F	.text	00000038 square	
00000088	g	F	.text	0000004c pick_prime	

00000000			*UND*	00000000 usr
00000000			*UND*	00000000 printf



external references (undefined)

Separate Compilation & Assembly

Compiler

Assembler

Linker

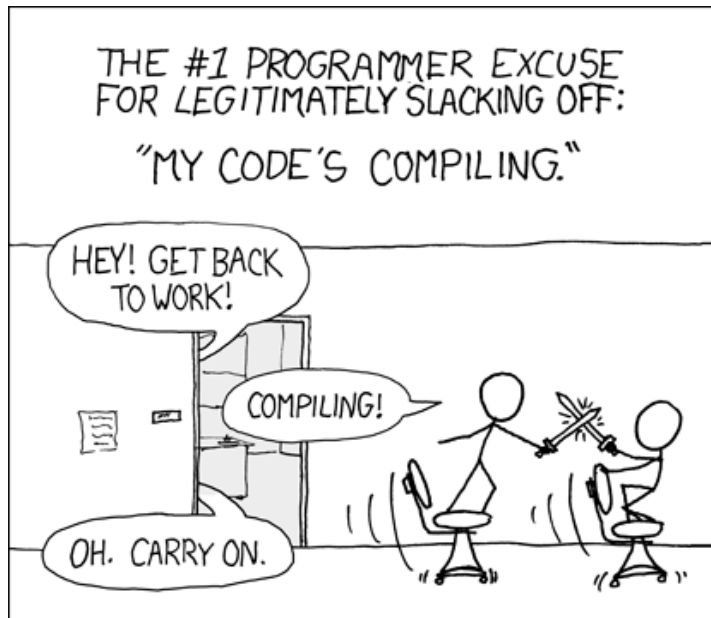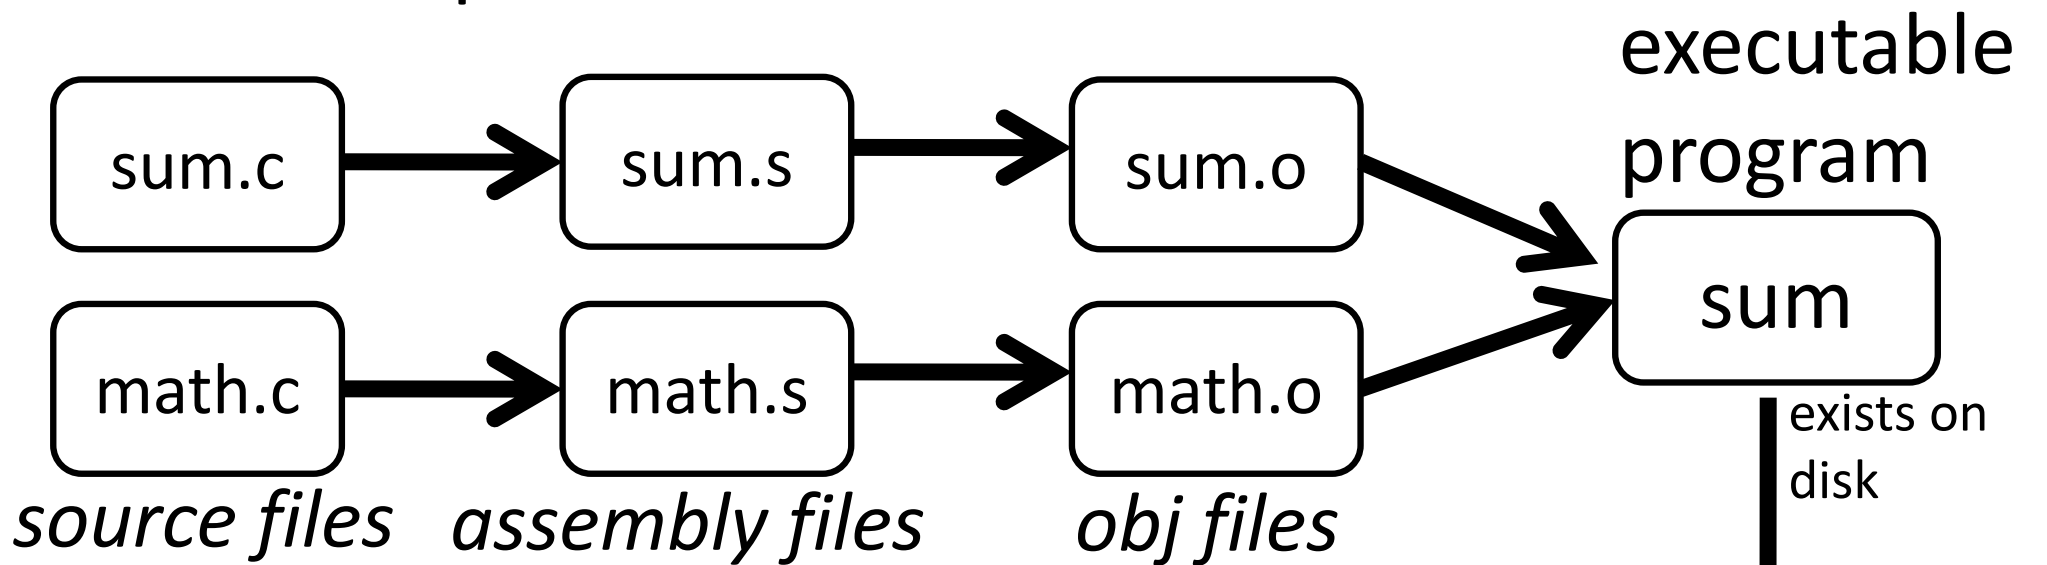

<http://xkcd.com/303/>

small change ?

→ recompile one module only

Executing in Memory process 16

Linkers

Linker combines object files into an executable file

- Resolve as-yet-unresolved symbols
- Each has illusion of own address space
 - Relocate each object's text and data segments
- Record top-level entry point in executable file

End result: a program on disk, ready to execute

- E.g.

./sum	Linux
./sum.exe	Windows
simulate sum	Class MIPS simulator

Static Libraries

Static Library: Collection of object files
(think: like a zip archive)


Q: Every program contains the entire library?!?

A: No, Linker picks only object files needed to resolve undefined references at link time

e.g. libc.a contains many objects:

- printf.o, fprintf.o, vprintf.o, sprintf.o, snprintf.o, ...
- read.o, write.o, open.o, close.o, mkdir.o, readdir.o, ...
- rand.o, exit.o, sleep.o, time.o,

Linker Example: Resolving an External Fn Call

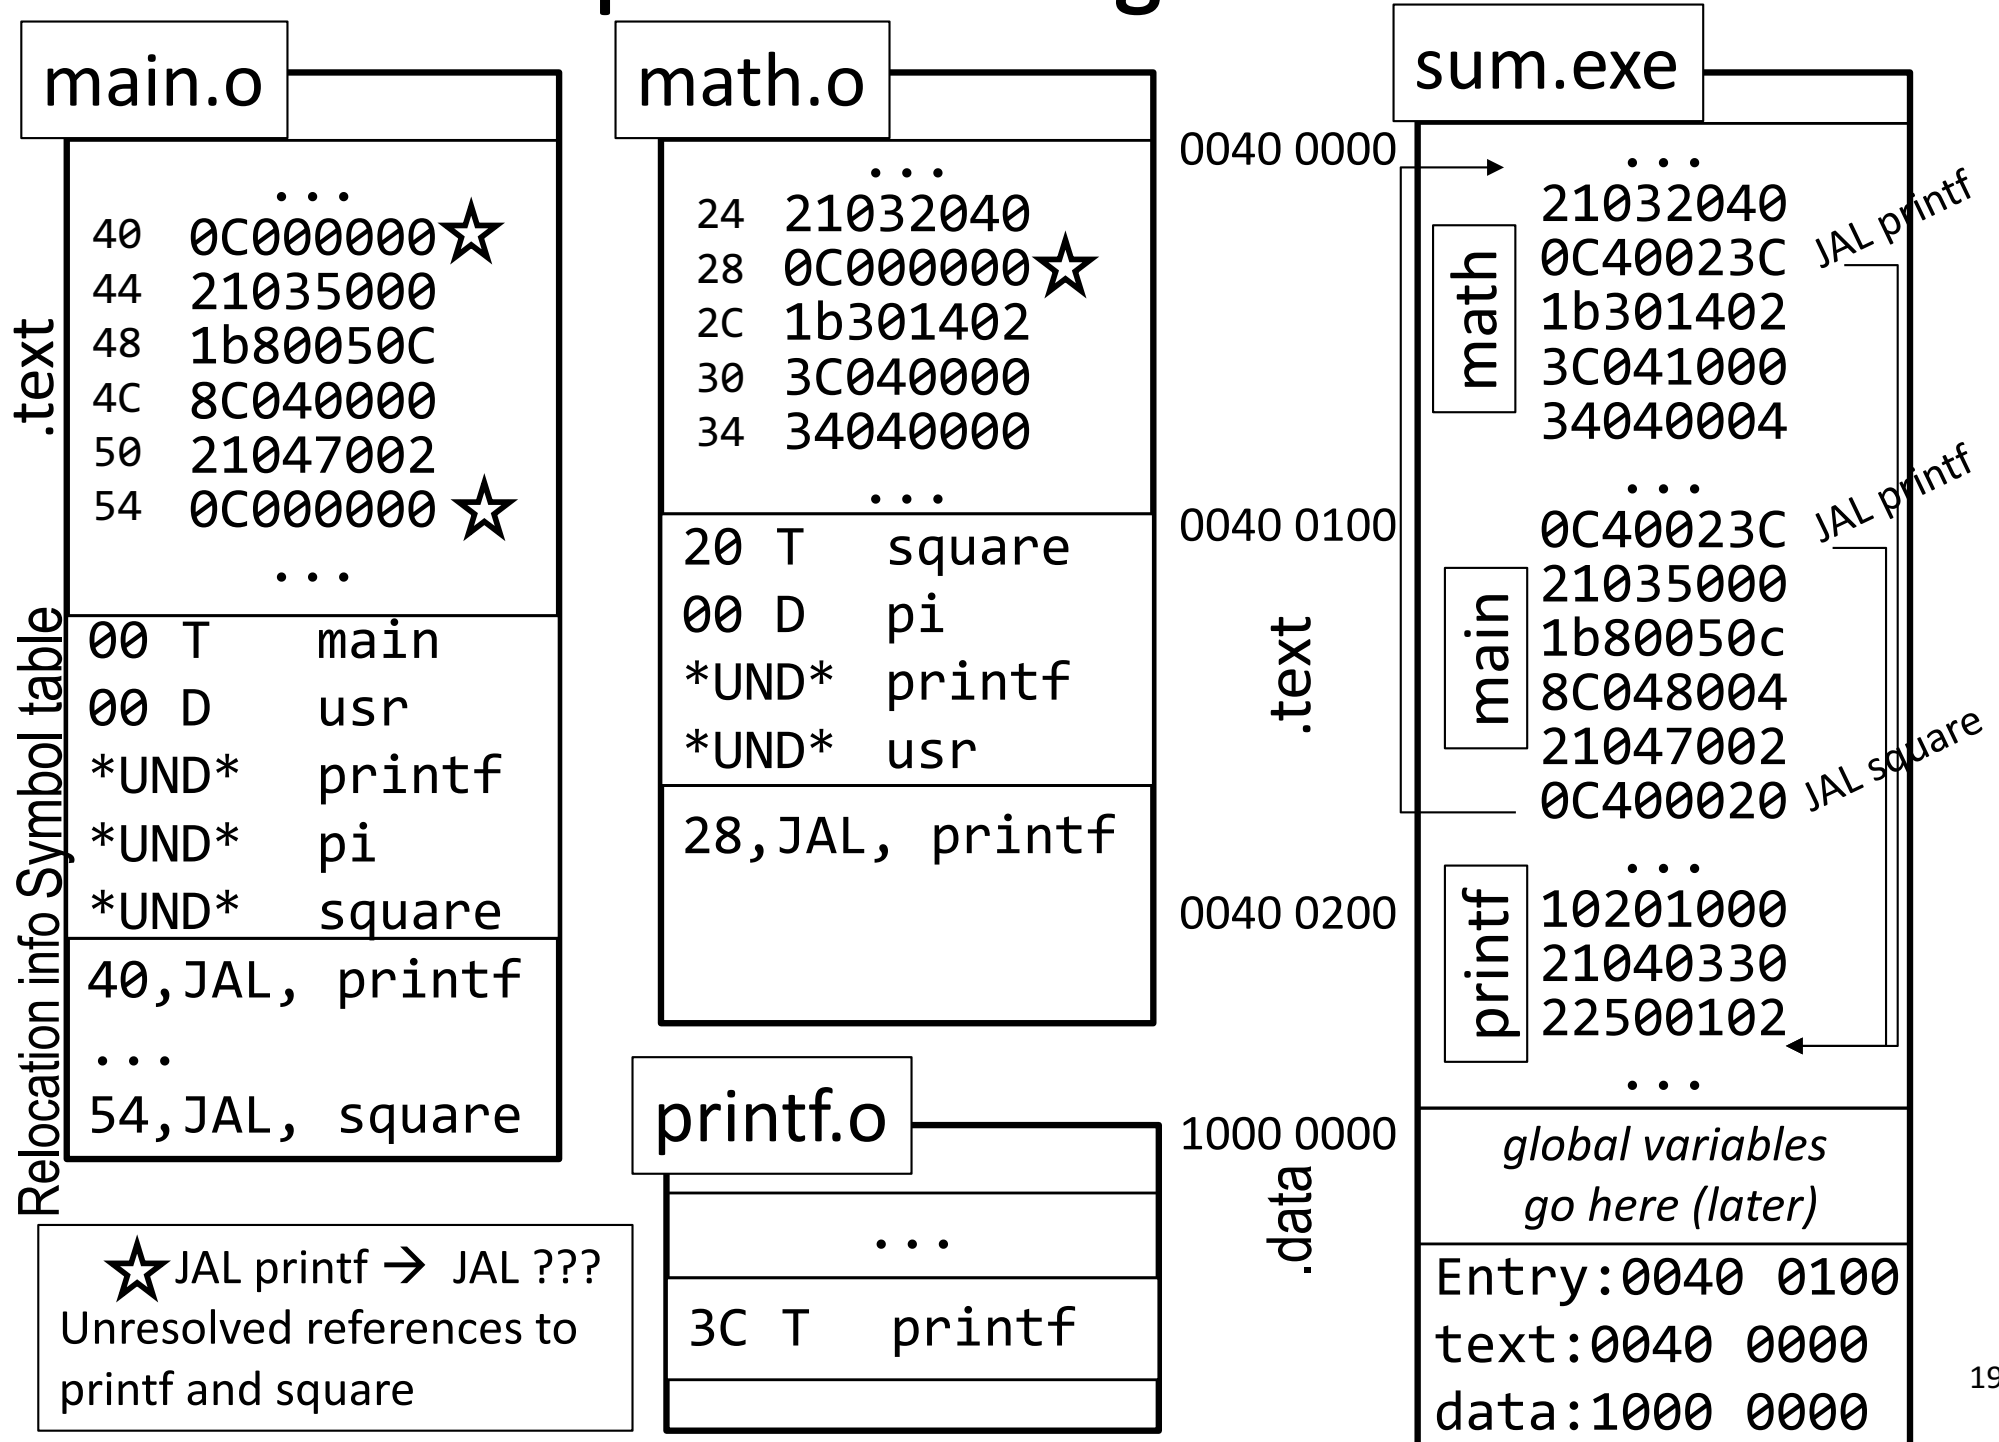

iClicker Question 1

main.o	
.text	<pre> ... 40 0C000000 44 21035000 48 1b80050C 4C 8C040000 50 21047002 54 0C000000 ... </pre>
	<pre> 00 T main 00 D usr *UND* printf *UND* pi *UND* square </pre>
Relocation info	<pre> 40,JAL, printf 4C,LW/gp, pi 54,JAL, square </pre>

math.o	
	<pre> ... 24 21032040 28 0C000000 2C 1b301402 30 3C040000 34 34040000 ... </pre>
	<pre> 20 T square 00 D pi *UND* printf *UND* usr </pre>
	<pre> 28,JAL, printf 30,LUI, usr 34,LA, usr </pre>

Which symbols are undefined according to both main.o and math.o's symbol table?

- A) printf
- B) pi
- C) square
- D) usr
- E) printf & pi

iClicker Question 2


main.o	
.text	<pre> 40 0C000000 44 21035000 48 1b80050C 4C 8C040000 50 21047002 54 0C000000 ... </pre>
	<pre> 00 T main 00 D usr *UND* printf *UND* pi *UND* square 40,JAL, printf 4C,LW/gp, pi 54,JAL, square </pre>

math.o	
	<pre> 24 21032040 28 0C000000 2C 1b301402 30 3C040000 34 34040000 ... 20 T square 00 D pi *UND* printf *UND* usr 28,JAL, printf 30,LUI, usr 34,LA, usr </pre>


Which which 2 symbols are currently assigned the same location?

- A) main & printf
- B) usr & pi
- C) square & printf
- D) main & usr
- E) main & pi

Linker Example: Loading a Global Variable

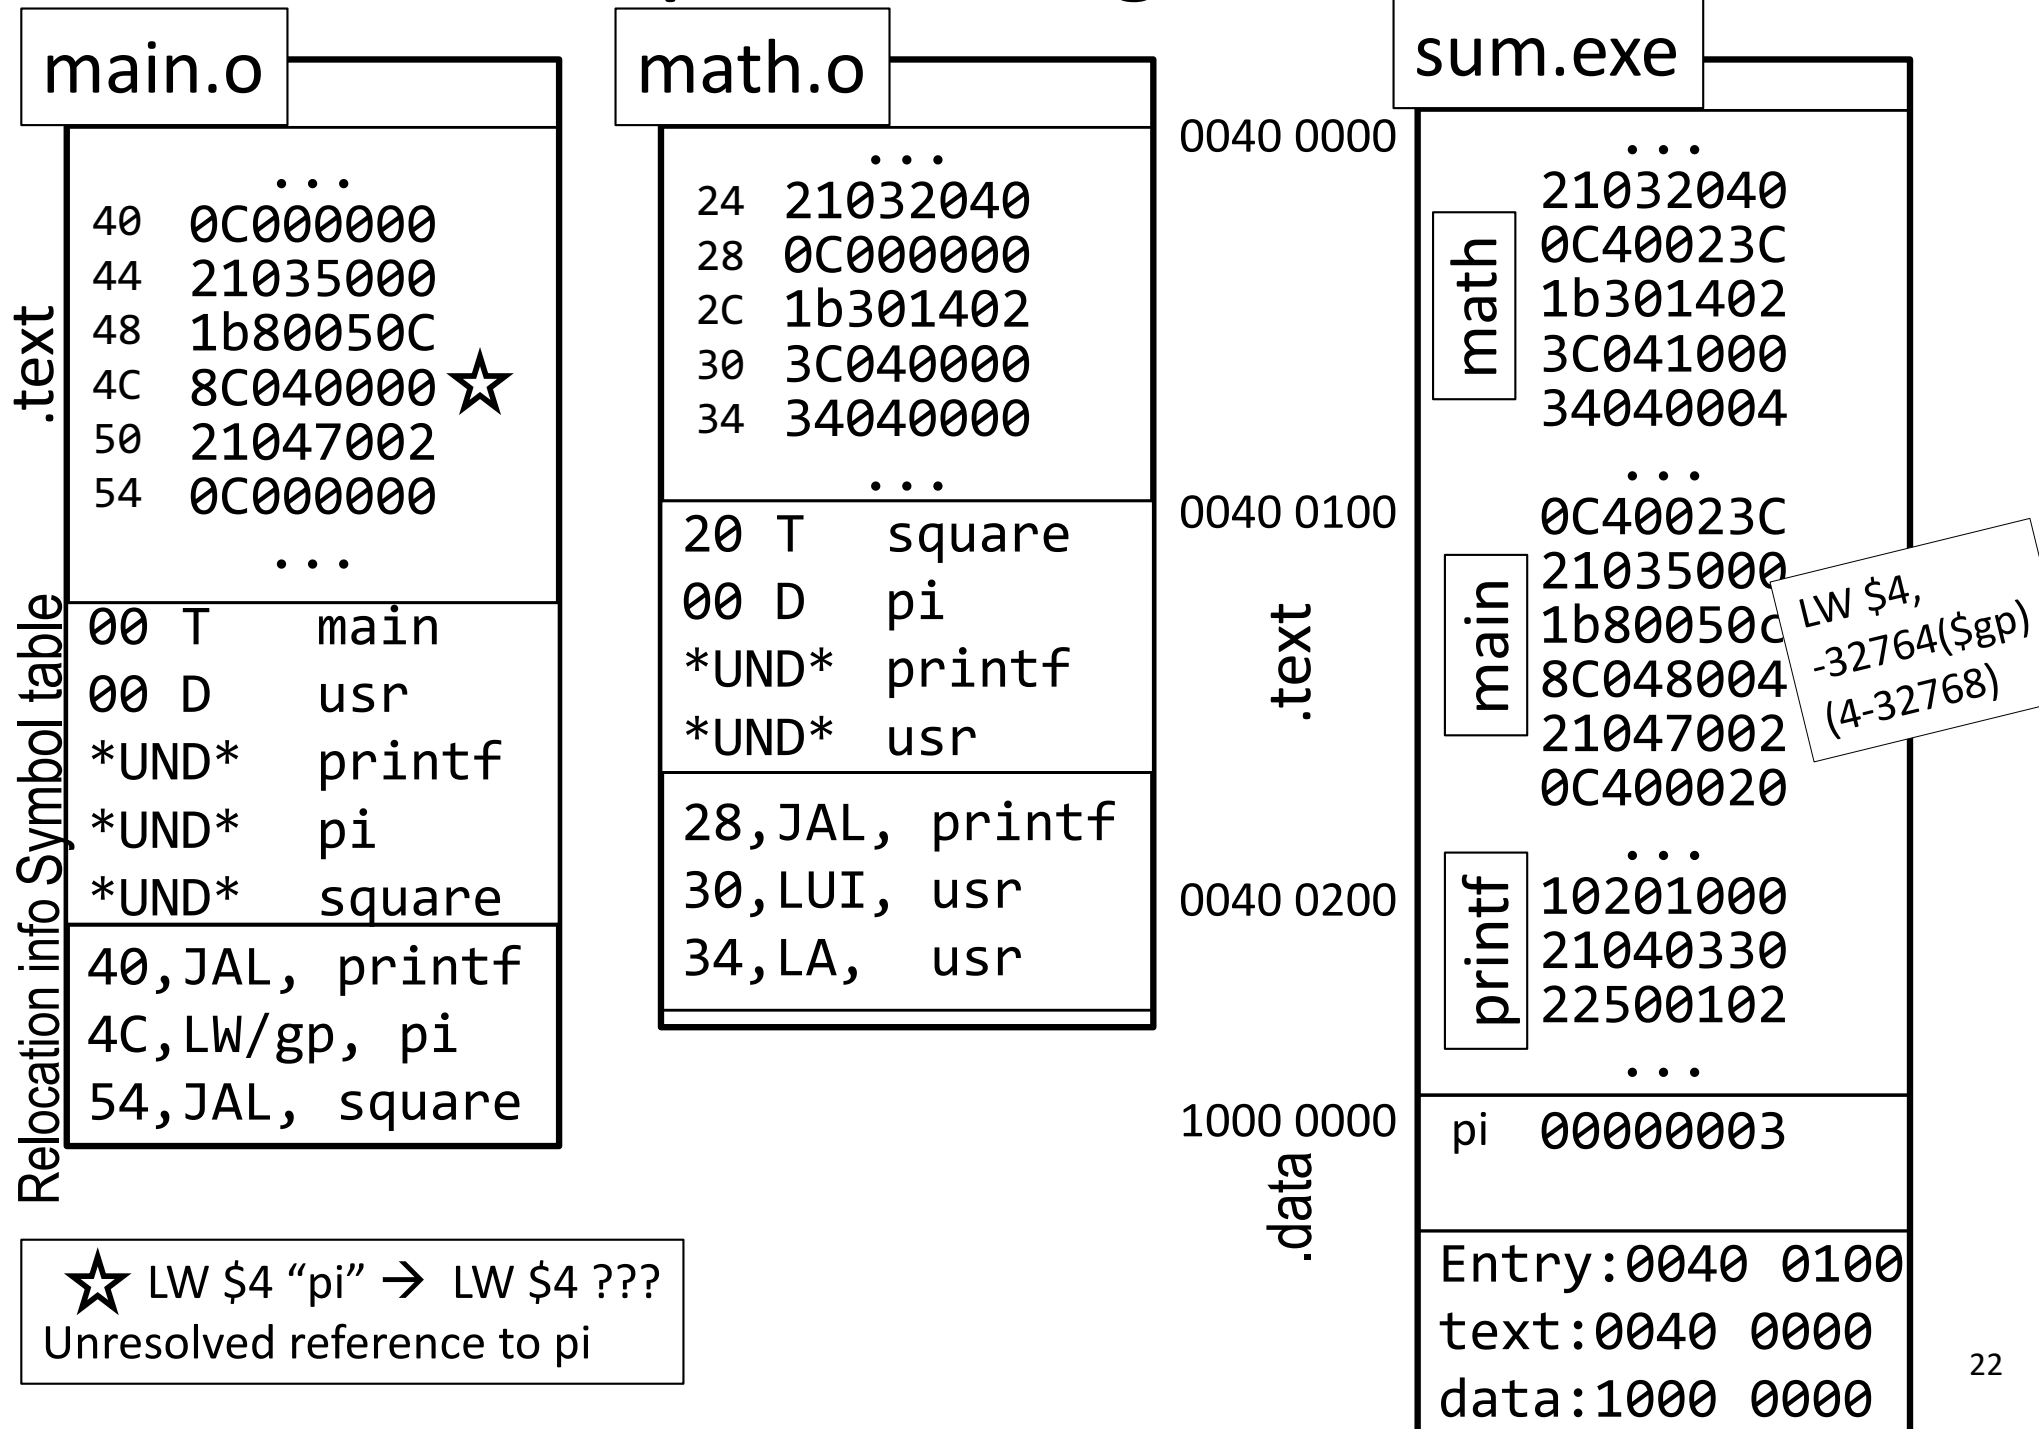

Linker Ex: Resolving Addr of Global Variable

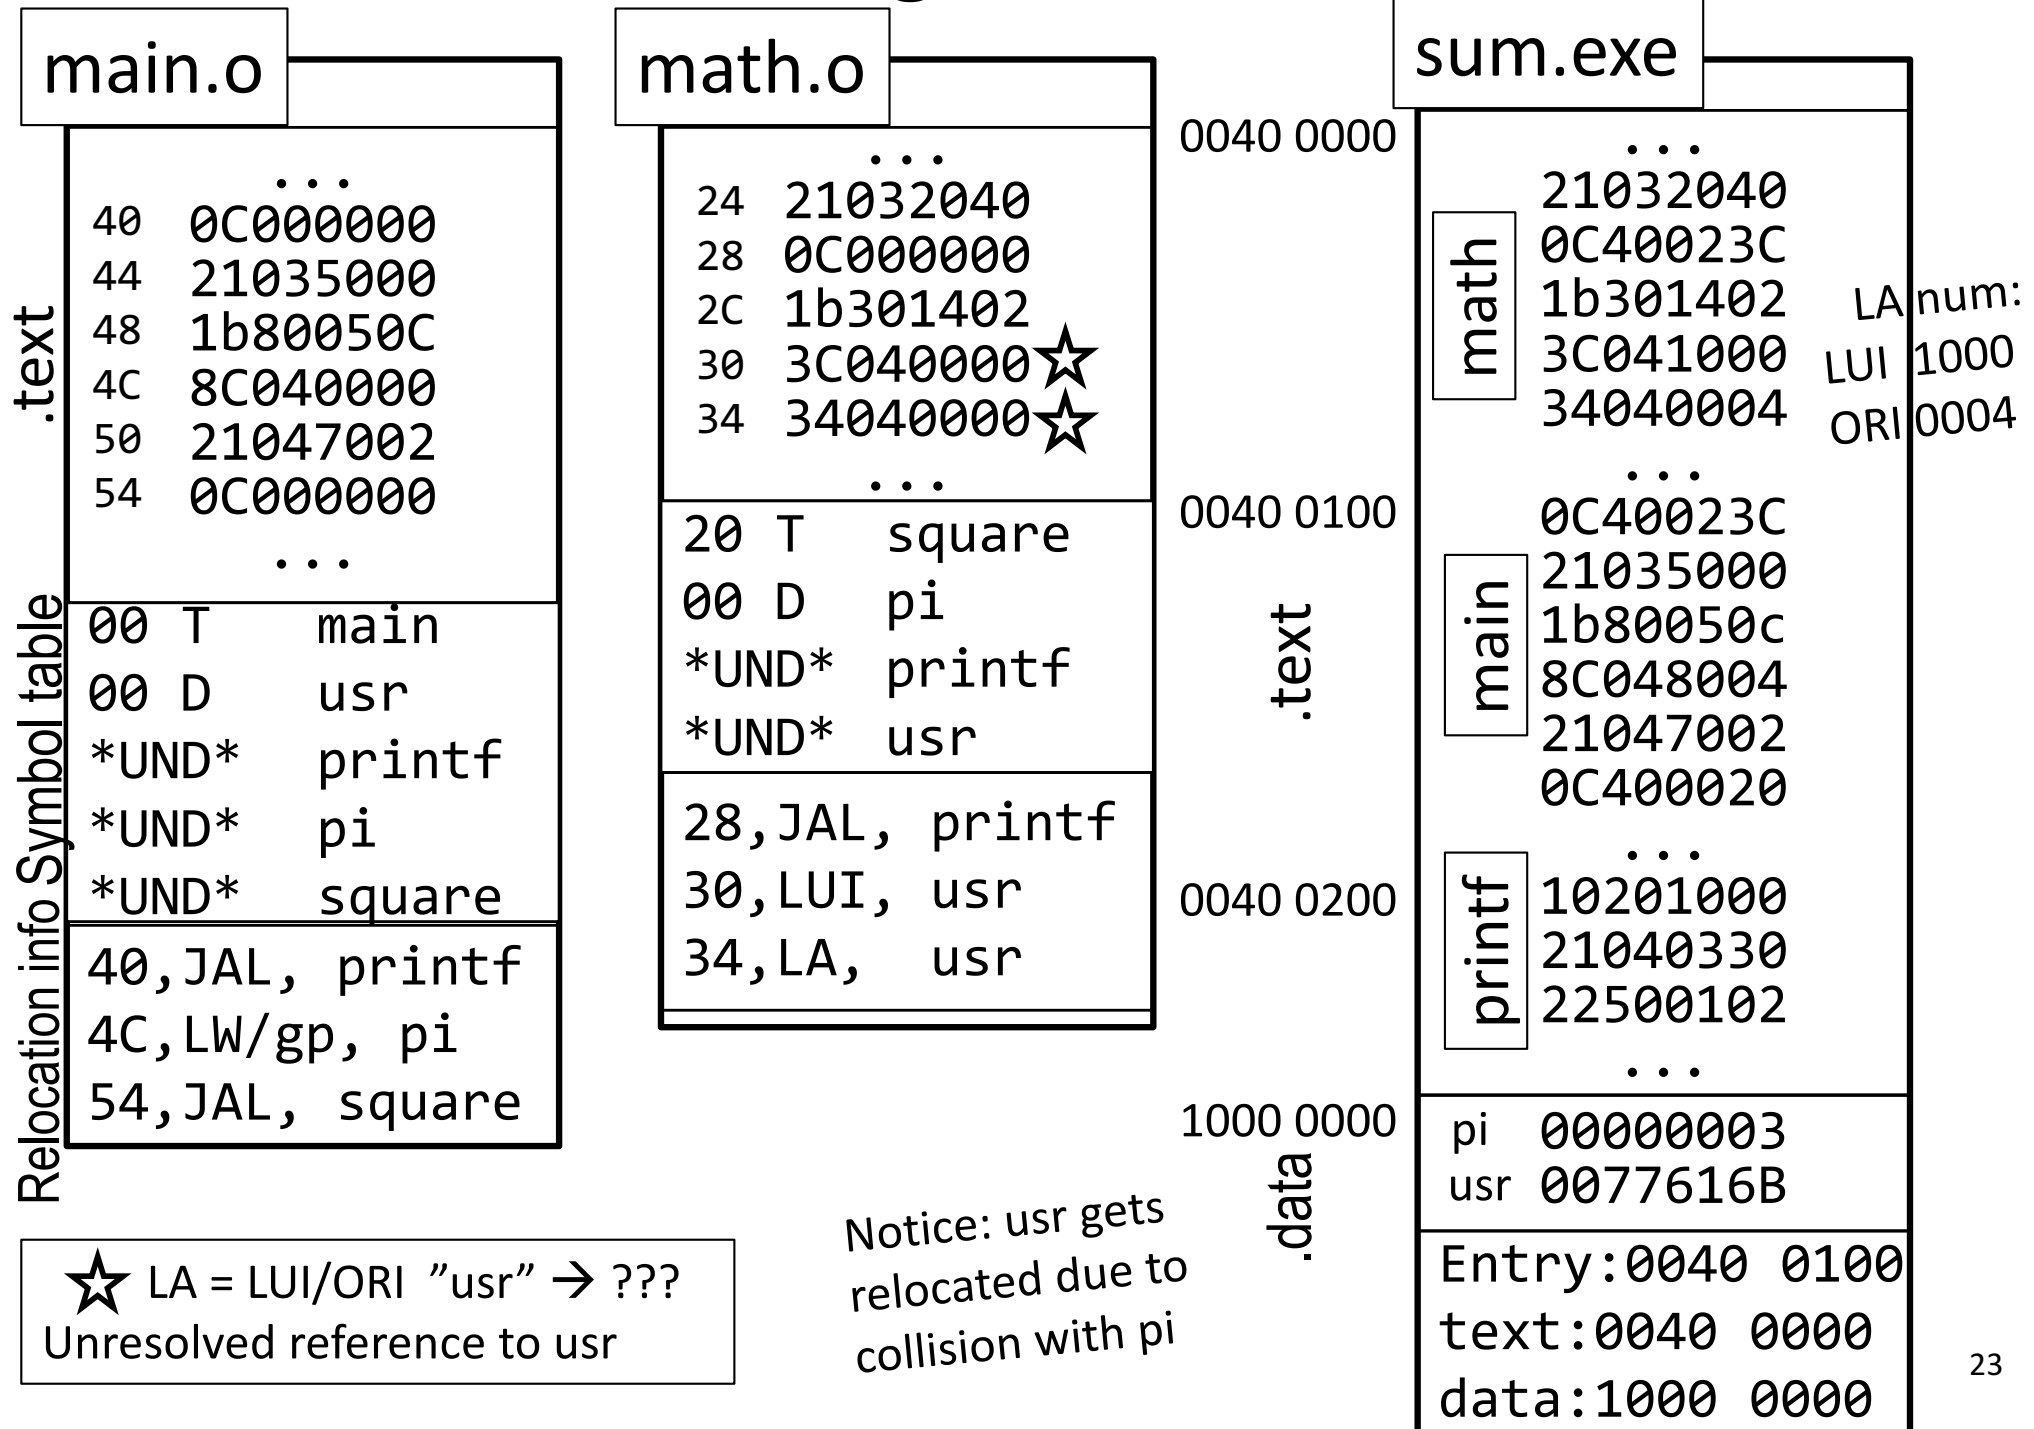

iClicker Question

```
#include <stdio.h>
#include heaplib.h


#define HEAP_SIZE 16
static int ARR_SIZE = 4;

int main() {
    char heap[HEAP_SIZE];
    hl_init(heap, HEAP_SIZE * sizeof(char));
    char* ptr = (char *) hl_alloc(heap, ARR_SIZE * sizeof(char));
    ptr[0] = 'h';
    ptr[1] = 'i';
    ptr[2] = '\0';
    printf("%s\n", ptr); return 0;
}
```

Where does the assembler place the following symbols in the object file that it creates?

- A. Text Segment
- B. Data Segment
- C. Exported reference in symbol table
- D. Imported reference in symbol table
- E. None of the above

Q1: HEAP_SIZE
Q2: ARR_SIZE
Q3: hl_init

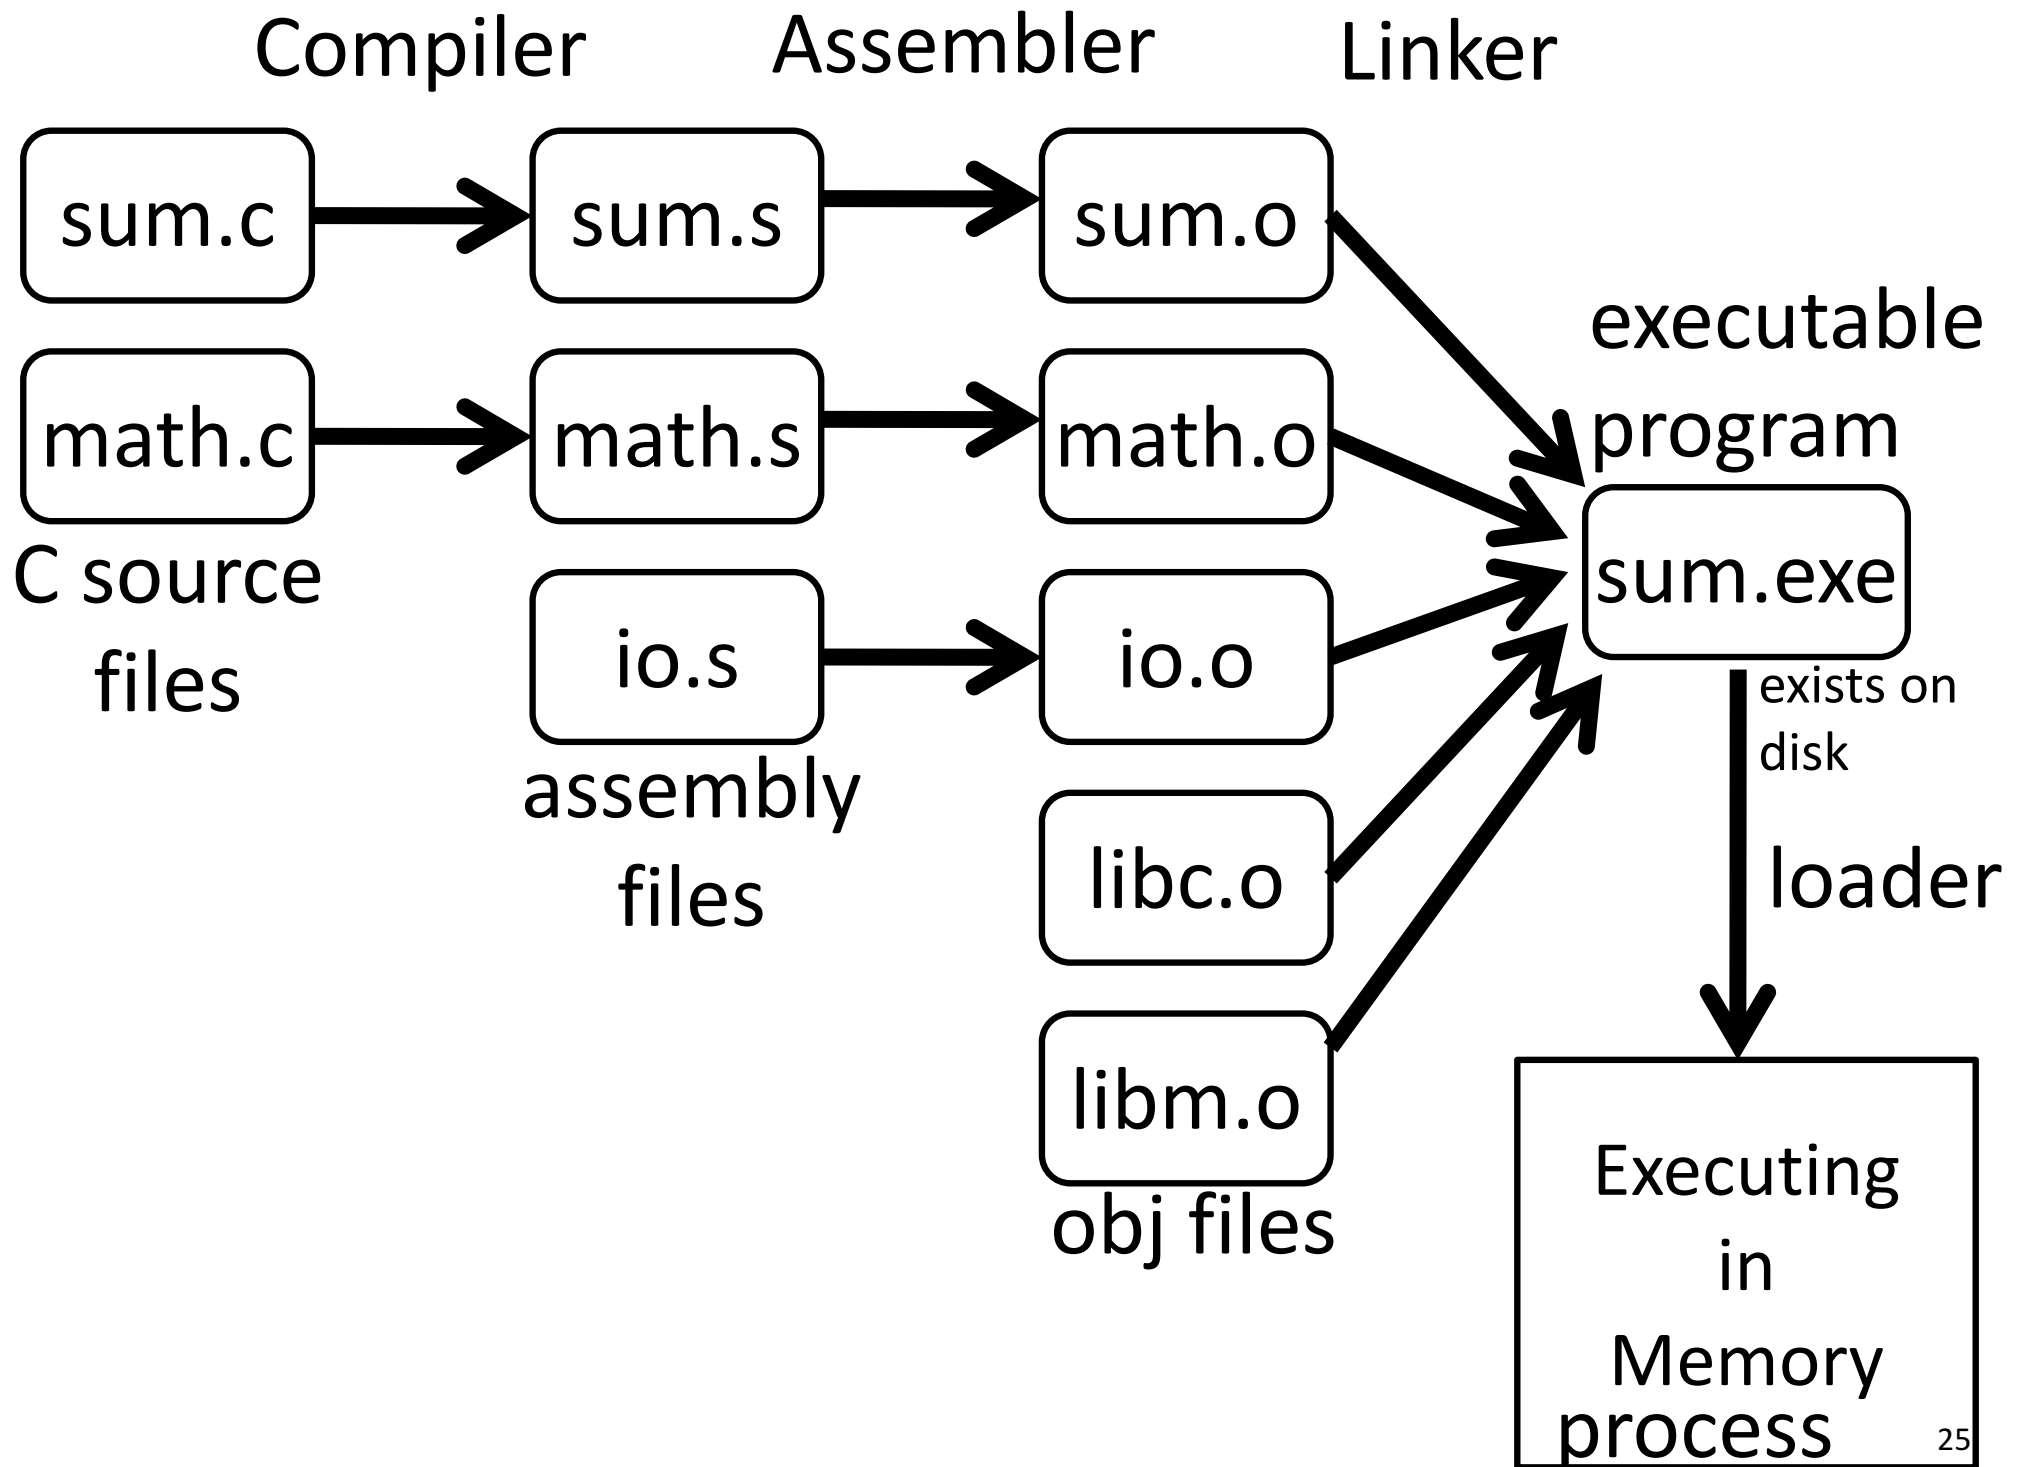

Loaders

Loader reads executable from disk into memory

- Initializes registers, stack, arguments to first function
- Jumps to entry-point

Part of the Operating System (OS)

Shared Libraries

Q: Every program contains parts of same library?!?

A: No, they can use shared libraries

- Executables all point to single *shared library* on disk
- final linking (and relocations) done by the loader

Optimizations:

- Library compiled at fixed non-zero address
- Jump table in each program instead of relocations
- Can even patch jumps on-the-fly

Static and Dynamic Linking

Static linking

- Big executable files (all/most of needed libraries inside)
- Don't benefit from updates to library
- No load-time linking

Dynamic linking

- Small executable files (just point to shared library)
- Library update benefits all programs that use it
- Load-time cost to do final linking
 - But dll code is probably already in memory
 - And can do the linking incrementally, on-demand

Takeaway

Compiler produces assembly files

- (contain MIPS assembly, pseudo-instructions, directives, etc.)

Assembler produces object files

- (contain MIPS machine code, missing symbols, some layout information, etc.)

Linker joins object files into one executable file

- (contains MIPS machine code, no missing symbols, some layout information)

Loader puts program into memory, jumps to 1st insn,
and starts executing a *process*

- (machine code)