CS412/413

Introduction to Compilers
Radu Rugina

Lecture 19: Liveness and Copy Propagation
8 Mar 02

Control Flow Graphs

- Control Flow Graph (CFG) = graph representation of computation and control flow in the program
  - framework to statically analyze program control-flow
- In a CFG:
  - Nodes are basic blocks; they represent computation
  - Edges characterize control flow between basic blocks
- Can build the CFG representation either from the high IR or from the low IR

Build CFG from High IR

```
while (c) {
   x = y + 1;
   y = 2 * z;
   if (d)  x = y+z;
   z = 1;
}
z = x;
```



Build CFG from Low IR

```
label L1
fjump c L2
x = y + 1;
y = 2 * z;
fjump d L3
x = y+z;
label L3
z = 1;
jump L1
label L2
z = x;
```



Using CFGs

- Next: use CFG representation to statically extract information about the program
  - Reason at compile-time
  - About the run-time values of variables and expressions in all program executions
- Extracted information example: live variables
- Idea:
  - Define program points in the CFG
  - Reason statically about how the information flows between these program points

Program Points

- Two program points for each instruction:
  - There is a program point before each instruction
  - There is a program point after each instruction



- In a basic block:
  - Program point after an instruction = program point before the successor instruction

Program Points: Example

- Multiple successor blocks means that point at the end of a block has multiple successor program points
- Depending on the execution, control flows from a program point to one of its successors
- Also multiple predecessors
- How does information propagate between program points?



Flow of Extracted Information

- Question 1: how does information flow between the program points before and after an instruction?
- Question 2: how does information flow between successor and predecessor basic blocks?
- … in other words:

  Q1: what is the effect of instructions?

  Q2: what is the effect of control flow?



Using CFGs

- To extract information: reason about how it propagates between program points
- Rest of this lecture: how to use CFGs to compute information at each program point for:
  - Live variable analysis, which computes live variables are live at each program point
  - Copy propagation analysis, which computes the variable copies available at each program point

Live Variable Analysis

- Computes live variables at each program point
  - I.e. variables holding values which may be used later (in some execution of the program)
- For an instruction I, consider:
  - in[I] = live variables at program point before I
  - out[I] = live variables at program point after I
- For a basic block B, consider:
  - in[B] = live variables at beginning of B
  - out[B] = live variables at end of B
- If I = first instruction in B, then in[B] = in[I]
- If I′ = last instruction in B, then out[B] = out[I′]

How to Compute Liveness?

- Answer question 1: for each instruction I, what is the relation between in[I] and out[I] ?

in[I]
I
out[I]

- Answer question 2: for each basic block B with successor blocks B_1, …, B_n, what is the relation between out[B] and in[B_1], …, in[B_n]?



Part 1: Analyze Instructions

- Question: what is the relation between sets of live variables before and after an instruction?

in[I]
I
out[I]

- Examples:

in[I] = {y,z}	in[I] = {y,z,t}	in[I] = {x,t}
x = y+z	x = y+z	x = x+1
out[I] = {z}	out[I] = {x,t}	out[I] = {x,t}

- … is there a general rule?

Analyze Instructions

- Yes: knowing variables live after I, can compute variables live before I:
  - All variables live after I are also live before I, unless I defines (writes) them
  - All variables that I uses (reads) are also live before instruction I

in[I]
I
out[I]

- Mathematically:

$$in[I] = (out[I] - def[I]) \cup use[I]$$

where:

- def[I] = variables defined (written) by instruction I
- use[I] = variables used (read) by instruction I

Computing Use/Def

- Compute use[I] and def[I] for each instruction I:

if I is x = y OP z :	use[I] = {y, z}	def[I] = {x}
if I is x = OP y :	use[I] = {y}	def[I] = {x}
if I is x = y :	use[I] = {y}	def[I] = {x}
if I is x = addr y :	use[I] = {}	def[I] = {x}
if I is if (x) :	use[I] = {x}	def[I] = {}
if I is return x :	use[I] = {x}	def[I] = {}
if I is $x = f(y_1,..., y_n)$:	use[I] = $\{y_1,..., y_n\}$	def[I] = {x}

(For now, ignore load and store instructions)

Example

- Example: block B with three instructions I1, I2, I3:
  - Live1 = in[B] = in[I1]
  - Live2 = out[I1] = in[I2]
  - Live3 = out[I2] = in[I3]
  - Live4 = out[I3] = out[B]
- Relation between Live sets:
  - Live1 = (Live2-{x}) ∪ {y}
  - Live2 = (Live3-{y}) ∪ {z}
  - Live3 = (Live4-{}) ∪ {d}

Block B

	Live1
I1	x = y+1
	Live2
I2	y =2*z
	Live3
I3	if (d)
	Live4

Backward Flow

- Relation:

$$in[I] = (out[I] - def[I]) \cup use[I]$$

in[I]
I
out[I]

- The information flows backward!
- Instructions: can compute in[I] if we know out[I]
- Basic blocks: information about live variables flows from out[B] to in[B]

In[B]
x = y+1
y =2*z
if (d)
out[B]

Part 2: Analyze Control Flow

- Question: for each basic block B with successor blocks B_1, …, B_n, what is the relation between out[B] and $in[B_1]$, …, $in[B_n]$?



- Examples:



- What is the general rule?

Analyze Control Flow

- Rule: A variables is live at end of block B if it is live at the beginning of one successor block
- Characterizes all possible program executions
- Mathematically:

$$out[B] = \bigcup_{B' \in succ(B)} in[B']$$



- Again, information flows backward: from successors B′ of B to basic block B

Constraint System

- Put parts together: start with CFG and derive a system of constraints between live variable sets:

$$\begin{cases} in[I] = (out[I] - def[I]) \cup use[I] & \text{for each instruction I} \\ out[B] = \bigcup_{B' \in succ(B)} in[B'] & \text{for each basic block B} \end{cases}$$

- Solve constraints:
  - Start with empty sets of live variables
  - Iteratively apply constraints
  - Stop when we reach a fixed point

Constraint Solving Algorithm

For all instructions in[I] = out[I] = ∅

Repeat

For each instruction I

$in[I] = (out[I] - def[I]) \cup use[I]$

For each basic block B

$out[B] = \bigcup_{B' \in succ(B)} in[B']$

Until no change in live sets

Example

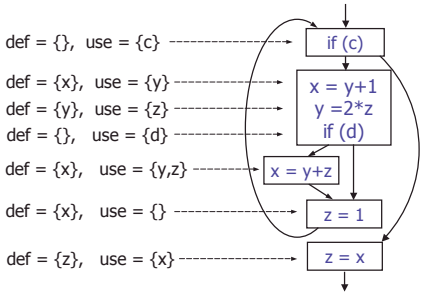

Copy Propagation

- Goal: determine copies available at each program point
- Information: set of copies <x=y> at each point
- For each instruction I:
  - in[I] = copies available at program point before I
  - out[I] = copies available at program point after I
- For each basic block B:
  - in[B] = copies available at beginning of B
  - out[B] = copies available at end of B
- If I = first instruction in B, then in[B] = in[I]
- If I′ = last instruction in B, then out[B] = out[I′]

Same Methodology

1. Express flow of information (i.e. available copies):
   - For points before and after each instruction (in[I], out[I])
   - For points at exit and entry of basic blocks (in[B], out[B])
2. Build constraint system using the relations between available copies
3. Solve constraints to determine available copies at each point in the program

Analyze Instructions

- Knowing in[I], can compute out[I]:
  - Remove from in[I] all copies <u=v> if variable u or v is written by I
  - Keep all other copies from in[I]
  - If I is of the form x=y, add it to out[I]

in[I]
I
out[I]

- Mathematically:

$$out[I] = (in[I] - kill[I]) \cup gen[I]$$

where:

- kill[I] = copies "killed" by instruction I
- gen[I] = copies "generated" by instruction I

Computing Kill/Gen

- Compute kill[I] and gen[I] for each instruction I:

if I is x = y OP z :	gen[I] = {}	kill[I] = {u=v|u or v is x}
if I is x = OP y :	gen[I] = {}	kill[I] = {u=v|u or v is x}
if I is x = y :	gen[I] = {x=y}	kill[I] = {u=v|u or v is x}
if I is x = addr y :	gen[I] = {}	kill[I] = {u=v|u or v is x}
if I is if (x) :	gen[I] = {}	kill[I] = {}
if I is return x :	gen[I] = {}	kill[I] = {}
if I is x = f(y_1,..., y_n) :	gen[I] = {}	kill[I] = {u=v| u or v is x}

(again, ignore load and store instructions)

Forward Flow

- Relation:
  out[I] = (in[I] – kill[I]) ∪ gen[I]
- The information flows forward!
- Instructions: can compute out[I] if we know in[I]
- Basic blocks: information about available copies flows from in[B] to out[B]



Analyze Control Flow

- Rule: A copy is available at end of block B if it is live at the beginning of all predecessor blocks
- Characterizes all possible program executions
- Mathematically:
  $in[B] = \bigcap_{B' \in pred(B)} out[B']$



- Information flows forward: from predecessors B' of B to basic block B

Constraint System

- Build constraints: start with CFG and derive a system of constraints between sets of available copies:

$$\begin{cases} out[I] = (in[I] - kill[I]) \cup gen[I] & \text{for each instruction I} \\ in[B] = \bigcap_{B' \in pred(B)} out[B'] & \text{for each basic block B} \end{cases}$$

- Solve constraints:
  - Start with empty sets of available copies
  - Iteratively apply constraints
  - Stop when we reach a fixed point

Example

- What are the available copies at the end of the program?

  x=y?

  z=t?

  x=z?



Summary

- Extracting information about live variables and available copies is similar
  - Define the required information
  - Define information before/after instructions
  - Define information at entry/exit of blocks
  - Build constraints for instructions/control flow
  - Solve constraints to get needed information
- …is there a general framework?
  - Yes: dataflow analysis!