

# CS Programming Code Assignment 7: Ray2

Out: Saturday 21th November 2015

Due: Thursday 3rd December 2015

## 1 Introduction

Ray 1 introduced you to the basic principles behind this relatively simple, and at the same time very powerful, algorithm for rendering images. In this assignment, we will enhance the previous algorithm to trace multiple light bounces, which will allow us to render essential physical effects that were impossible to produce before (e.g., reflection and refraction of light).

You will quickly realize that tracing multiple ray bounces fits quite nicely in the provided framework and does not require much of an effort to implement, but it also reveals the major problem behind this approach: its performance. Therefore, one of your goals in this assignment will be to implement a hierarchical data structure that will accelerate the bottleneck step in ray tracing, the ray-object intersection.

## 2 Requirement Overview

In Ray 1, you implemented the basic ray tracing; we will provide a package that contains what you implemented from that assignment, plus some updates to the framework. You will extend this ray tracer as specified below. This new ray tracer should support all the features of the one in Ray 1 and the following features below:

- *Anti-aliasing.* Implement anti-aliasing using regular supersampling (Shirley 8.3, 9.4, 13.4).
- *An acceleration structure.* Your program should be capable of rendering large models (up to several hundred thousand triangles) with basic settings in a few minutes. Achieving this requires a spatial data structure that makes the time to trace a ray sublinear in the number of objects. In this assignment, we provide a framework for axis-aligned bounding volume hierarchy (BVH) which is a simple and effective way of speeding up ray traversal. (Shirley 12.3). Before you have implemented BVH, you can add `<AccelStruct type="NaiveAccelStruct"/>` in the scene file in order to test other parts of your implementation.
- *Advanced shader: Cook-Torrance.* You should implement a Cook-Torrance shader which you are familiar with from the Shaders assignment. The only difference is that now you should compute the fresnel term from the refractive index.
- *Advanced shader: glass.* A “Glass” material that simulates an interface between air and adielectric material. The glass shader obtains its color from light intensity along two new

rays, the reflected and refracted rays, and adds their corresponding contributions (Shirley 13.1).

- *Environment mapping.* Our framework can load a pfm (a HDR image format) file as environment mapping. You are asked to implement a method that looks up the color of the cubemap in a given direction.
- We have provided a list of extensions that can be implemented for extra credit.

### 3 Implementation

A new commit has been pushed to the class Github page in the master branch. We recommend switching to your master branch, pulling this commit, and creating a new branch (e.g., A7 solution) and committing your work there. This new commit contains all the framework changes and additions necessary for this project.

We have marked all the functions or parts of the functions you need to complete with `TODO#A7` in the source code. To see all these TODOs in Eclipse, select Search menu, then File Search and type `TODO#A7`.

#### 3.1 Antialiasing

To support anti-aliasing, modify the `renderBlock` method of `RayTracer` to make the ray tracer shoot multiple rays per image pixel. `renderBlock` method contains the `samples` variable which is the number of samples to take per dimension of the image plane. (That is, the tracer should shoot  $\text{samples}^2$  rays per pixel.) Note that we have abused the variable `samples`: in the xml file we use `samples` to refer to  $N^2$ , while here it refers to  $N$ .

#### 3.2 Acceleration Structure

You will implement an acceleration structure called *axis-aligned bounding volume hierarchy* (BVH). It is a tree whose leaves are surfaces in the scene. Each of its internal nodes contains an *axis-aligned bounding box* (AABB) that contains all the surfaces in the subtree rooted at that node. An axis-aligned bounding box is defined by two 3D points  $(x_{min}, y_{min}, z_{min})$  and  $(x_{max}, y_{max}, z_{max})$ . The box itself is the Cartesian product of three intervals in each dimension,

$$[x_{min}, x_{max}] \times [y_{min}, y_{max}] \times [z_{min}, z_{max}].$$

Before constructing the acceleration structure, you need to complete the `computeBoundingBox` method of all the subclasses of `Surface` except `Mesh`. This method should modify three fields: `minBound`, `maxBound`, and `averagePosition`. After calling this method, the AABB defined by `minBound` and `maxBound` in world space should contain the represented surface entirely in world space, and `averagePosition` should be a 3D position in world space inside the AABB that can be regarded as the center of the surface in world space. We stress that `minBound`, `maxBound`, and `averagePosition` are defined in **world space**; you need to take into account the transform stored in `tMat` when implementing the method because all other fields are defined in object space.

After implementing all the `computeBoundingBox` methods, you are ready to complete the `Bvh` class. Each node in the BVH is represented by an instance of the `BvhNode` class. The root node is stored in the `root` field of the `Bvh` class. The surfaces the BVH manages are not stored in the nodes, but they are stored all in one place in the `surfaces` array in the `Bvh` class. Each `BvhNode` contains the `surfaceIndexStart` and `surfaceIndexEnd` subjected to the following invariant:

Surfaces stored in `surfaces` with indices from `surfaceIndexStart` to `surfaceIndexEnd-1` are contained in the subtree rooted at the node.

`BvhNode` also contains the `minBound` and `maxBound` fields that define the AABB corresponding to the node. Moreover, it has `child` array which contains the references to its left child and right child. You need to implement the `createTree(int start, int end)` method of the `Bvh` class. This method should create and return a `BvhNode` that contains surfaces from `surfaces[start]` to `surfaces[end-1]` in its subtree. To do so, you need to divide the surfaces into two groups by sorting their `averagePosition` and modifying the `surfaces` array so that the first group is in the left half and the second group is in the right half of the array. Then, you call `createTree` recursively on the left and the right half to get two `BvhNodes` that will become the two children of the `BvhNode` that you construct for the original call to `createTree`. More details can be found in the comments in the code base.

Then, you will implement the `intersects` method of the `BvhNode` class. This method only checks whether the given ray intersects the AABB of the `BvhNode` or not. There is no need to compute the intersection point or other associated information.

Lastly, you need to implement the `intersectHelper` method of the `Bvh` class. This method checks whether the given ray intersects any surface contained in the subtree rooted at the given `BvhNode`. First, you should check whether the ray hits the node or not by calling the `intersects` method of the `BvhNode` class. If not, the method can return immediately. (This check is the key why ray intersection becomes much faster with a BVH.) Otherwise, if the `BvhNode` is a leaf, you intersect the ray with the surfaces with indices from `surfaceIndexStart` to `surfaceIndexEnd-1` one by one. On the other hand, if the `BvhNode` is an internal node, you call `intersectHelper` recursively on its two children.

### 3.3 Cook-Torrance Shader

For detailed description, see the Shaders assignment pdf. There we used the Schlick approximation to compute the Fresnel term. Now after you have implemented the `fresnel` function in `Shader.java`, you should use that to compute the Fresnel term instead.

### 3.4 Glass Shader

The `Glass` shader simulates an interface between air and a dielectric material. For its `shade` method, it should compute the directions of the reflected and refracted rays using Snell's law. `shadeRay` should then be called recursively on each of these rays. The factor for the reflected ray should be  $R$ , and the factor for the refracted ray should be  $1 - R$ . You need to check for total internal reflection in which case you only generate the reflected ray and set its factor to 1. One caveat is that the method must work for rays coming from both sides of the surface; you can tell

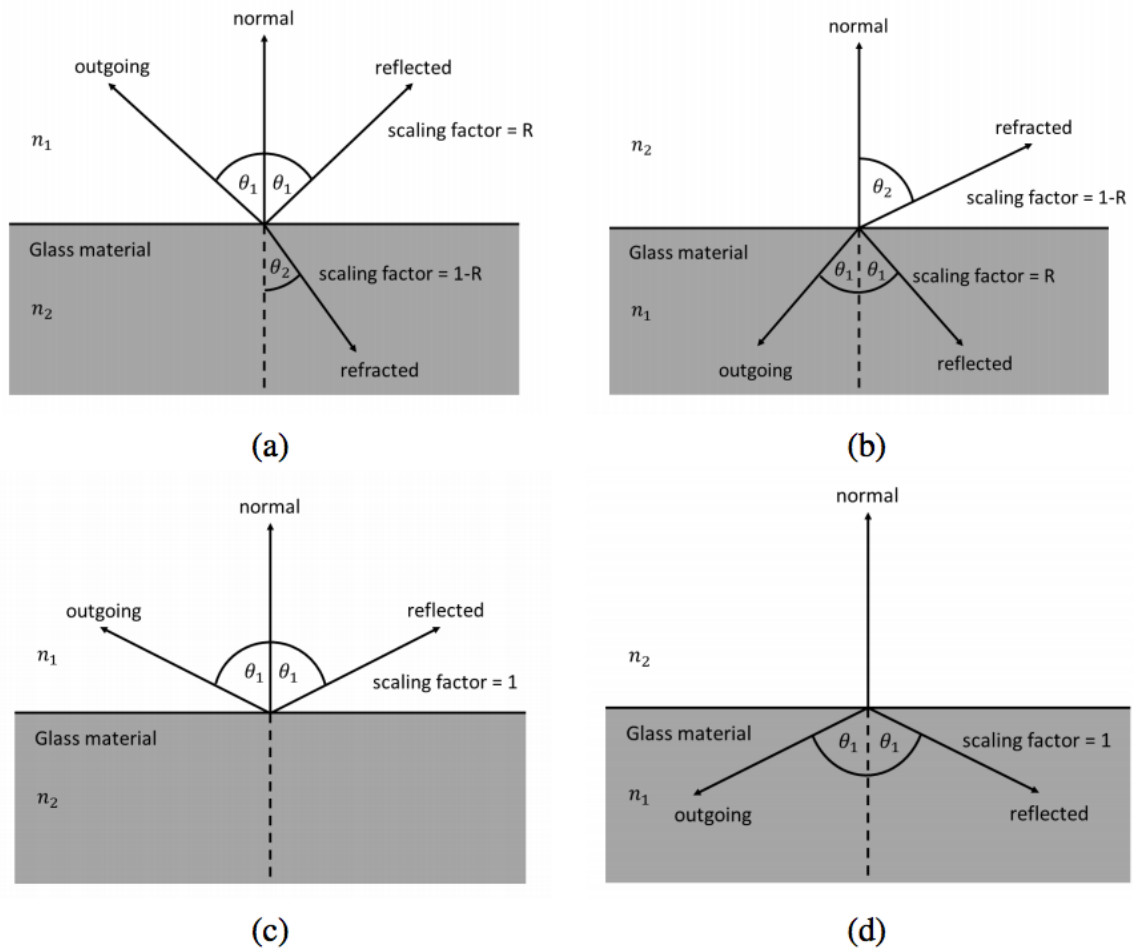


Figure 1: Additional rays to be generated for the `GLASS` shader. In (a) and (b), one reflected ray with scaling factor  $R$  and one refracted ray with scaling factor  $1 - R$  are generated. Note that the outgoing direction can either be inside or outside the surface. The angles  $\theta_1$  and  $\theta_2$  should be related by Snell's law:  $n_1 \sin \theta_1 = n_2 \sin \theta_2$ . In (c) and (d), total internal reflection occurs. Only one reflected ray should be generated with scaling factor  $1$ . Note that total internal reflection can happen on the outside of the material despite its name because the ratio between  $n_1$  and  $n_2$  can be arbitrary. Your code has to work correctly in all these cases.

which side is outside by the fact that the normal always points outside. Figure 1 summarizes the behavior of the `Glass` shader.

### 3.5 Environment Mapping

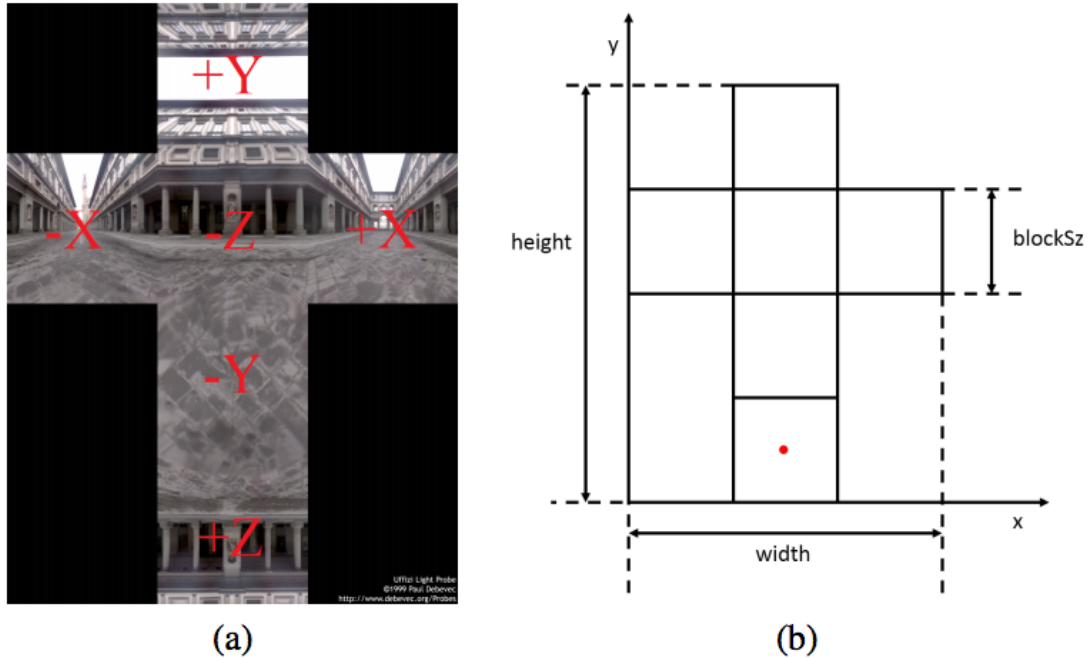


Figure 2: Example of Cubemap

The framework supports environment mapping as a background for the scene. For a scene with a cubemap, rays that don't hit any objects should look up the corresponding pixel value in the cubemap. The framework can load a pfm (an HDR image format) file as the environment map. An example of such a file is shown in figure 2. It's just an unfolding of the six faces of the axis-aligned cube into a cross. The corresponding directions for each of the faces are shown in figure 2.

You are asked to implement the `evaluate` method of the `Cubemap` class, which looks up the color of the cubemap in a given direction. In the `Cubemap` class, fields `width` and `height` store the width and height of the entire pfm image. The `blockSz` field stores the size of the square, which is `width/3`. The pixel values of the pfm image are stored in the float array `imageData`. The R, G, B values of a pixel are stored sequentially. And the pixels in the image are ordered row by row, from bottom-left to top-right. For example, if we want the color of environment light in direction  $(0, 0, 1)$ , we need to look up the pixel value at the red point in Figure 2. Its coordinates in the image plane is  $(x = 1.5 * \text{blockSz}, y = 0.5 * \text{blockSz})$ . And the R, G and B values would be `imageData[3 * (x + width * y)]`, `imageData[3 * (x + width * y) + 1]` and `imageData[3 * (x + width * y) + 2]`.

## 4 Extensions

Once you have all of the required features working, you can continue having fun and collecting bonus points at the same time, by implementing some of the extensions proposed below. If you implement any of these, please leave a description of what you did in your README file, and create an xml file or two to clearly demonstrate these features.

- *Soft shadows.* Shadow rays need not go to a single point, but can be distributed over an area of the light source. Implementing soft shadows requires shooting more rays and distributing them evenly over the area light. You will need to extend the model of lights to have some area (a square area is convenient) for this problem.
- *Camera depth of field.* A real camera exhibits depth of field effects, such that objects far away from the focal distance are blurry. This can be simulated in a ray tracer using distributed rays. Refer to section 13.4.3 in the book (Shirley et al., Third Edition) for more details.
- *Spotlights.* Extend your point light source to be a circular spotlight. A spotlight has a direction, a beam angle  $\theta_b$ , and a falloff angle  $\theta_f$ , in addition to the usual position and intensity. For directions that make an angle less than  $\theta_b$  with the spotlight's direction, it produces the same intensity as a regular point light. For directions that are more than an angle of  $\theta_b + \theta_f$  from the spot direction, it produces no illumination. In the falloff zone it drops off smoothly according to a  $C^1$  function of angle.
- *Bilinearly filtered texture mapping.* Implement bilinearly filtered texture mapping for triangle meshes. Use bilinear interpolation when you sample the texture.
- *Metal shader.* Implement a shader called “metal” that takes a complex refractive index, with separate values for R, G, B, and uses them to compute Fresnel reflectance for a conductor.
- *Glaze shader.* A “Glazed” material that acts like a thin layer of dielectric over another material, and reflects somewhat like a mirrored surface. The glazed shader also calls another shader which computes the contribution from the substrate below the glaze (Shirley 13.1).
- *Propose your own.* You can propose your own extension based on something you heard in lecture, read in the book, or learned about somewhere else. Doing this requires a little extra work to document the extension and come up with a good test case. If you want to do your own extension, email your proposal to the course staff list.

## 5 Handing in

Submit a zip file containing your solution organized the same way as the code in the repository, together with your solutions for the written assignment. We strongly recommend you write your solutions for the written part neatly in a PDF file. Include a readme in your zip that contains:

- You and your partner's names and NetIDs.
- Any problems with your solution.
- Anything else you want us to know.

## 6 Appendix A: HDR output

The ray2 framework supports HDR output. In order to use HDR output, set the `writeHDR` variable in `RayTracer.java` to be true. We use the `openEXR` library to produce HDR output. You may need to configure your native library location. To do this in Eclipse, go to Project → Properties → Java Build Path → Select Libraries → Select the `openexrjni-3.0.0.jar`. Drop Down Menu → Modify Native Library Location. Modify this setting so that it matches your OS. Also in Project → Properties → Java Build Path → Select Source → Select the `CS4620/src`. Drop Down Menu → Modify Native Library Location. Modify this setting so that it matches your OS.

The HDR output file will be named as `*.exr`. You can download a tool from the following address to view the `*.exr` files as well as the `*.pfm` files. <https://bitbucket.org/edgarv/hdritools/downloads>

## 7 Appendix B: Notes on File Format

The code base still use the same framework that was released with Ray 1. In this section, we note some additional features that you can specify in the input XML file.

*Transformations.* We already give you the solution of group transformations, but you should also know the input file format. The transformation is specified as a sequence of rotations, scales, and translations, which are combined in the order given to define the transformation that is applied to all members of the group. Translations and scales have components for  $x$ ,  $y$ , and  $z$ ; a rotation is a sequence of three rotations about the three coordinate axes, with the  $x$  rotation applied first and the  $z$  rotation applied last.

The file format can be defined by example. For instance, if a transformation is given as T: 1 2 3; R: 40 50 60; S: 0.7 0.8 0.9, this can be specified in the ray tracer as follows:

```
<surface type="Group">
    <translate>1.0 2.0 3.0</translate>
    <rotate>40 50 60</rotate>
    <scale>0.7 0.8 0.9</scale>
    <rotate>40 50 60</rotate>
    <surface type="Sphere">
        <!-- ... -->
    </surface>
    <!-- more surfaces, all transformed as defined above -->
</surface>
```

*Cook-Torrance shader.* You can specify the diffuse color, specular color, toughness and refractive index for Cook-Torrance shader in the scene file.

```
<surface type="CookTorrance">
    <diffuseColor>0.3 0.3 0.3</diffuseColor>
```

```

    <specularColor>0.2 0.2 0.2</specularColor>
    <roughness>0.8</roughness>
    <refractiveIndex>1.5</refractiveIndex>
</shader>

```

*Glass shader.* In the input file the glass material should be specified just by its index of refraction, through a parameter named `refractiveIndex`:

```

<shader type="Glass">
    <refractiveIndex>1.5</refractiveIndex>
</shader>

```

*Antialiasing.* This part is in extension, but we will offer the information for those who want to implement antialiasing. The number of samples is specified by the `samples` property of the `Scene` class. For example, the following input specifies a 640 by 480 pixel image rendered with a 3x3 grid of subpixel samples for each pixel.

```

<scene>
    <camera>
        <!-- ... -->
    </camera>
    <image>640 480</image>
    <samples>9</samples>
</scene>

```

You are free to round the number of samples to a convenient number (for example, to the nearest perfect square). Use any rounding technique that you'd like, as long as specifying a perfect square results in exactly that many samples. Note that the `samples` element here is approximately the square of the `samples` variable in the `renderImage` method.

*AccelStruct.* The type of `AccelStruct` used can be specified by a single line as a child of `scene`. This may be useful for testing your `AccelStruct` implementations, especially for scenes with large meshes.

```

<scene>
    <accelStruct type="Bvh" />
    <!-- ... -->
</scene>

```

*Cubemap.* You can use specify the directory of the cubemap in the xml file, just as follows.

```

<scene>
    <cubemap>
        <filename>texture filename</filename>
    </cubemap>
</scene>

```

```
    </cubemap>  
    <!-- ... -->  
</scene>
```