

Shading

CS 465 Lecture 5

Notes

- Reading:
 - Shirley et al., Chapter 9 “Surface Shading”
- Acknowledgement:
 - Most slides: Steve Marschner

Visual cues to 3D geometry

- size (perspective)
- occlusion
- shading

Shading


- Variation in observed color across an object
 - strongly affected by lighting
 - present even for homogeneous material
- caused by how a material reflects light
 - depends on
 - geometry
 - lighting
 - material
 - therefore gives cues to all 3



[Philip Greenspun]

Recognizing materials

- Human visual system is quite good at understanding shading

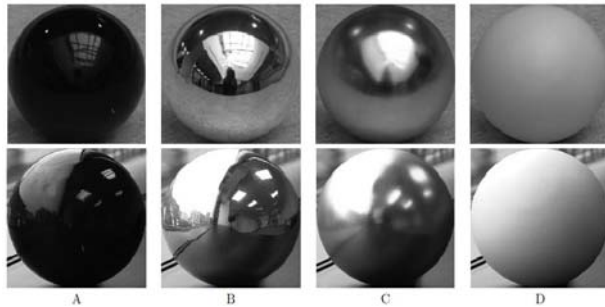

[Dror, Adelson, & Willsky]

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 5

Shading for Computer Graphics

- Need to compute an image
 - of particular geometry
 - under particular illumination
 - from a particular viewpoint
- Basic question: how much light reflects from an object toward the viewer?


Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 6


Simple materials



metal





dielectric



Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 7


Adding microgeometry




Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 8


Classic reflection behavior



ideal specular (Fresnel)



rough specular




Lambertian

Basics of local lighting

- Diffuse reflection
 - light goes everywhere
 - colored by object color
- Specular reflection
 - happens only near mirror configurations
 - needs to be spread out some for point lights
 - usually white (except colored metals: e.g. copper, gold)
- Ambient reflection
 - don't worry about where light comes from
 - just add a constant amount of light to account for other sources of illumination

Shading: diffuse reflection


- Assume light reflects equally in all directions
 - therefore surface looks same color from all views: “view independent”
- Illumination on an oblique surface is less than on a normal one




– generally: illumination falls off as $\cos \theta$

Diffuse reflection


- Light is scattered uniformly in all directions
 - the surface color is the same for all viewing directions
- Lambert's cosine law



Top face of cube receives a certain amount of light




Top face of 60° rotated cube intercepts half the light



In general, light per unit area is proportional to $\cos \theta = L \cdot N$

Lambertian shading

- Shading independent of view direction

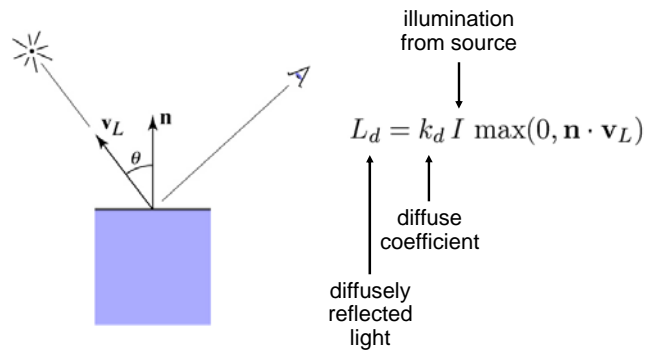


Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 13

Lambertian shading

- Produces matte appearance

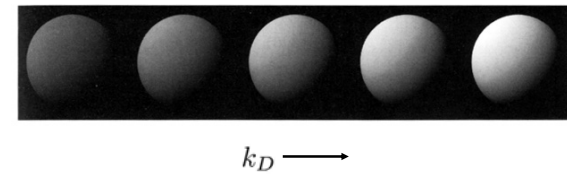


[Foley et al.]

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 14

Diffuse shading

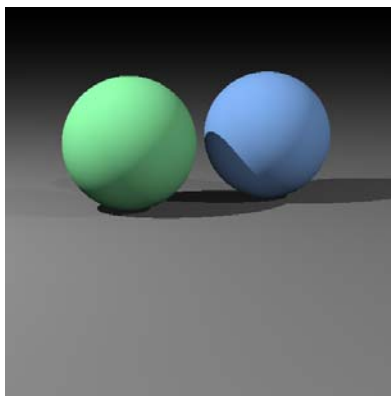


Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 15

Specular shading (Phong model)

- Intensity depends on view direction
 - bright near mirror configuration




Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 16

Specular shading (Phong model)

- Intensity depends on view direction
 - bright near mirror configuration

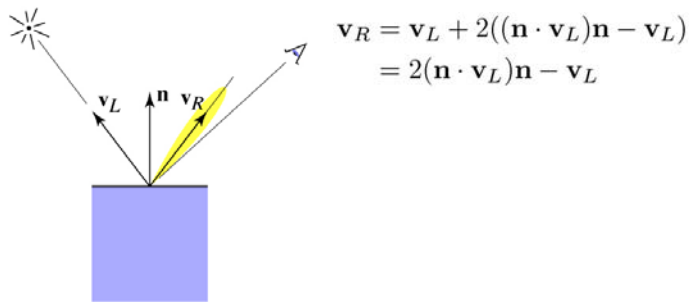


Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 17

Specular shading (Phong model)

- Intensity depends on view direction
 - bright near mirror configuration

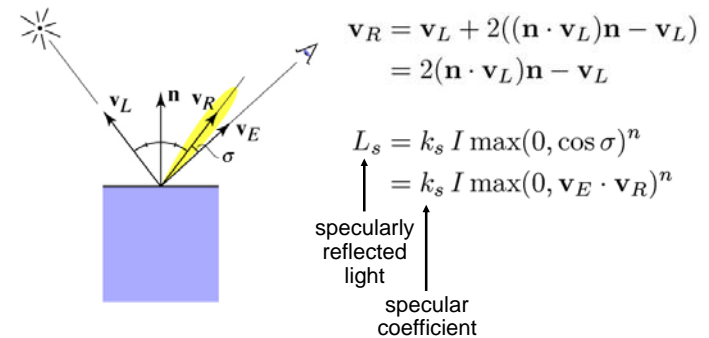

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 18

Phong model—plots

- Increasing n narrows the lobe

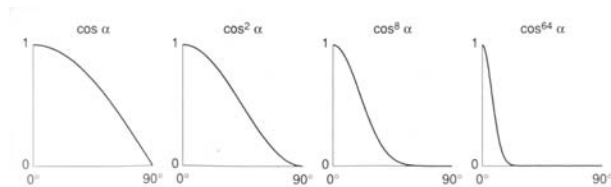


Fig. 16.9 Different values of $\cos^n \alpha$ used in the Phong illumination model.


[Foley et al.]

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 19

Phong variant: Blinn-Phong

- Rather than computing reflection directly, just compare to normal bisection property

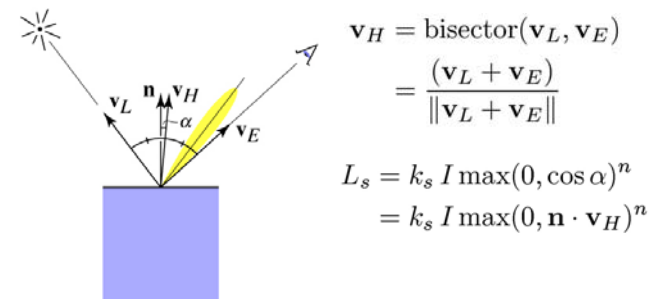


Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 20

Specular shading

- Phong and Blinn-Phong

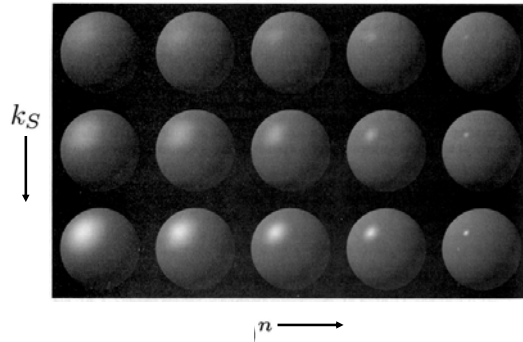


[Foley et al.]

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 21

Phong + Diffuse shading

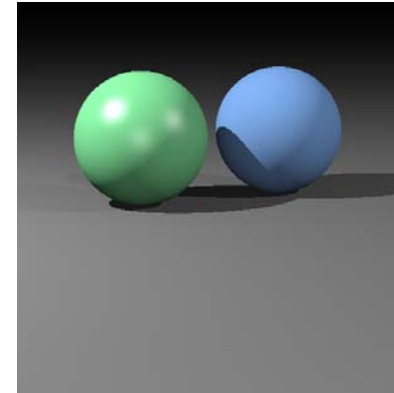


Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 22

Ambient shading

- Shading does not depend on anything
 - add constant color to account for disregarded illumination and fill in black shadows

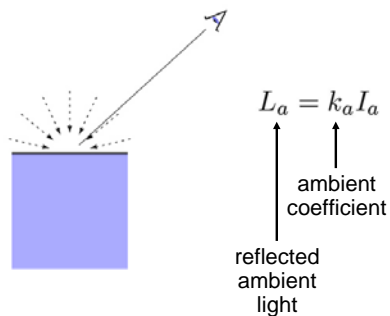

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 23

Putting it together

- Usually include ambient, diffuse, Phong in one model

$$L = L_a + L_d + L_s$$

$$= k_a I_a + I (k_d \max(0, \mathbf{n} \cdot \mathbf{v}_L) + k_s \max(0, \mathbf{n} \cdot \mathbf{v}_H)^n)$$

- The final result is the sum over many lights

$$L = L_a + \sum_i (L_d)_i + (L_s)_i$$

$$= k_a I_a + \sum_i I_i (k_d \max(0, \mathbf{n} \cdot (\mathbf{v}_L)_i) + k_s \max(0, \mathbf{n} \cdot (\mathbf{v}_H)_i)^n)$$

Cornell CS465 Fall 2007 • Lecture 5

© 2007 Doug James • 24


Mirror reflection

- Consider perfectly shiny surface
 - there isn't a highlight
 - instead there's a reflection of other objects
- Can render this using recursive ray tracing
 - to find out mirror reflection color, ask what color is seen from surface point in reflection direction
 - already computing reflection direction for Phong...
- “Glazed” surface has mirror reflection and diffuse

$$L = L_a + L_d + L_m$$

- where L_m is evaluated by tracing a new ray

Diffuse + mirror reflection (glazed)

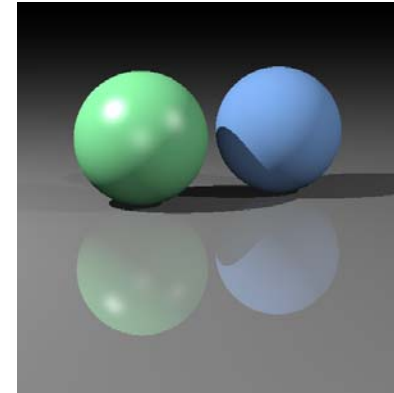

(glazed material on floor)

OpenGL: “Tutors” demo

