

CS 5416 Recitation 6

Multithreading and Synchronization III

10/03/2025

Jamal Hashim

Overview

- Multithreading
 - Locking recap
 - Condition variable
- HW2 introduction

Multithreading

- Threads management
 - Launching threads
 - Threads completion
- Synchronization
 - Race condition
 - Atomic
 - **Mutex**
 - **Locks**
 - **Condition variable**

Semantics



Code
example

Recap

Locking

---protecting data with mutex



- How does mutex work?
 - Before accessing a shared data structure, you **lock the mutex** associated with that data
 - When finished accessing the data structure, you **unlock the mutex**.



std::mutex



exclusive, non-recursive ownership

- A thread owns the **mutex** from the time when it call **lock()** until it calls **unlock()**
- The Thread Library then ensures that **once one thread** has locked a specific mutex, **all other threads** that try to lock the same mutex **have to wait** until the thread that successfully locked the mutex unlocks it.

Locking

---std::mutex::lock(), unlock()

```
1  int    global_num = 0;
2  std::mutex    globalMutex;

3  void incre(int num){
4      globalMutex.lock();
5      global_num = global_num + 1;
6      globalMutex.unlock();
7  }

8  int main(){
9      std::thread threadA(incre, 10);
10     std::thread threadB(incre, 10);
11     threadA.join();
12     threadB.join();
...}
```

Only one
thread could
enter line 5 at
a time

Locking

---std::mutex::lock(), unlock()

- std::mutex::lock(), unlock()
 - It is **not recommended** practice to call lock(), unlock() directly, because this means that you have to remember to call **unlock()** on **every code path out of a function that called lock()**, including those due to exceptions.

RAII (Resource Acquisition is initialization) re-visit

- Resource acquisition must succeed for initialization to succeed:
 - In RAII, holding a resource is a class invariant is tied to object lifetime: resource allocation is done during object creation, by the constructor; while resource deallocation is done during object destruction, by the destructor.
- If there are no object leaks, there are no resource leaks.
 - The resource is guaranteed to be held between when initialization finishes and finalization starts, and to be held only when the object is alive.

Mutex and RAII locks



- `std::unique_lock`
- `std::scoped_lock`
- `std::shared_lock`

```
std::mutex my_mutex;  
{  
    std::unique_lock<std::mutex> lck(my_mutex);  
    ... ..  
}
```

```
{  
    std::unique_lock<std::mutex> lck(my_mutex);  
    ... ..  
}
```

```
std::shared_mutex shared_mutex;  
{  
    std::shared_lock<std::mutex> lck(shared_mutex);  
    ... ..  
}
```

Locking

---unique_lock

- A unique lock is an **object** that **manages a mutex object** with **unique ownership** in both states: locked and unlocked.
- RAll: When creating a local variable of type `std::unique_lock` passing the mutex as parameter.
 - On construction, the object **acquires a mutex object**, for whose locking and unlocking operations becomes responsible.
 - This class **guarantees** an **unlocked** status on **destruction** (even if not called explicitly).
- Features:
 - Deferred locking, Timeout locks, adoption of mutexes, movable(transfer of ownership)

Locking

---unique_lock

```
1  int    global_num = 0;
2  std::mutex    globalMutex;

3  void incre(int num){
4      std::unique_lock<std::mutex> u_lock(globalMutex);
5      global_num = global_num + 1;
6      ...
7  }

8  int main(){
9      std::thread t1(incre, 1);
10     std::thread t2(incre, 3);
11     t1.join();
12     t2.join();
    ...}
```

Only one
thread could
enter line 5-7
at a time

Locking

---unique_lock

Unique_lock feature: Deferred locking

```
std::mutex mtx;

void conditional_locking(bool should_lock) {
    // Create lock but do not acquire it
    std::unique_lock<std::mutex> lock(mtx, std::defer_lock);
    if (should_lock) {
        lock.lock();    // Conditionally acquire the lock
        std::cout << "Lock acquired." << std::endl;
    } else {
        std::cout << "Lock not acquired." << std::endl;
    }
}
```


```
int main() {
    std::thread t1(conditional_locking, true);
    std::thread t2(conditional_locking, false);
    t1.join();
    t2.join();
    return 0;
}
```

Locking

---scoped_lock

- Scoped_lock: a mutex wrapper which obtains access to (locks) the provided mutex, and ensures it is unlocked when the scoped lock goes out of scope

```
1  int    global_num = 0;
2  std::mutex    globalMutex;
3
4  void incre(int num){
5      {
6          std::scoped_lock s_lock(globalMutex);
7          global_num = global_num + 1;
8      }
9      global_num = global_num + 1;
10     ...
11 }
12
```



Locking

---shared_lock

- `std::shared_lock` allows for shared ownership of mutexes.



```
std::shared_mutex mtx;
int global_val;
void print_val (int n, char c) {
    std::shared_lock<std::shared_mutex > lck (mtx);
    std::cout << global_val << std::endl;
}
int main () {
    std::thread th1 (print_val);
    std::thread th2 (print_val);
    th1.join();
    th2.join();
}
```

Exercise from last time --- RW lock

- Reader-writer lock
 - Single writer or multiple reader ownership

Exercise from last time


--- Why RW lock?

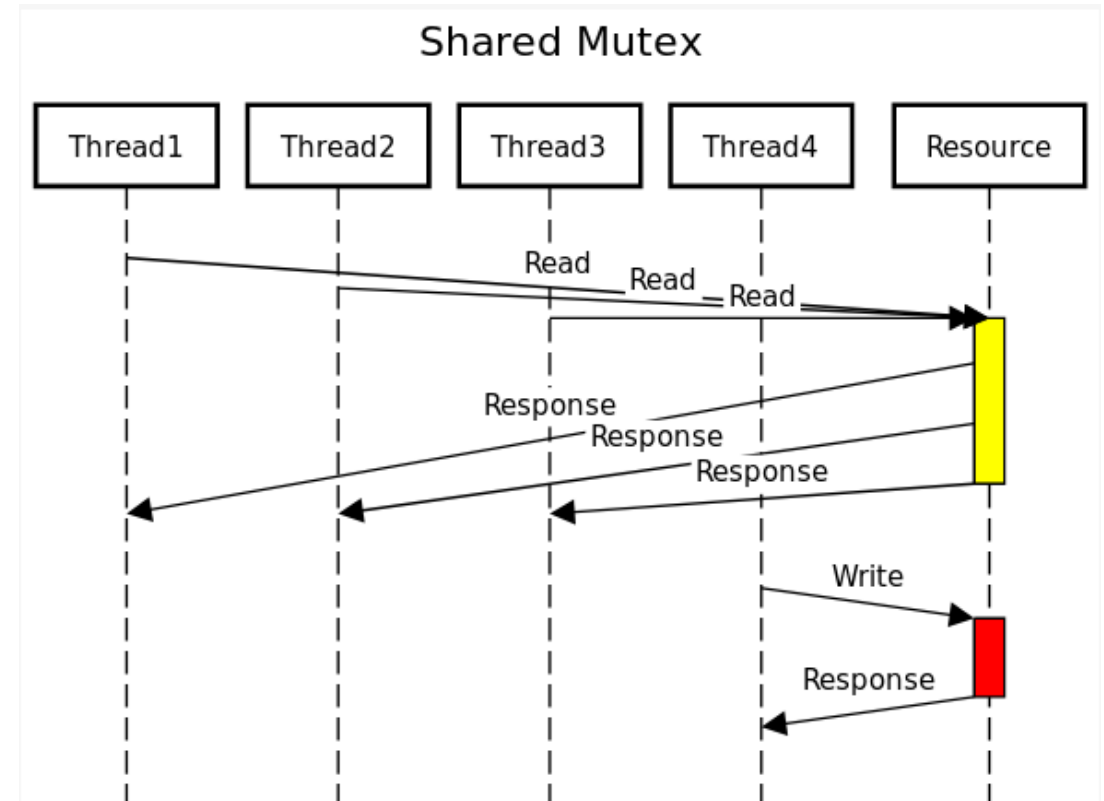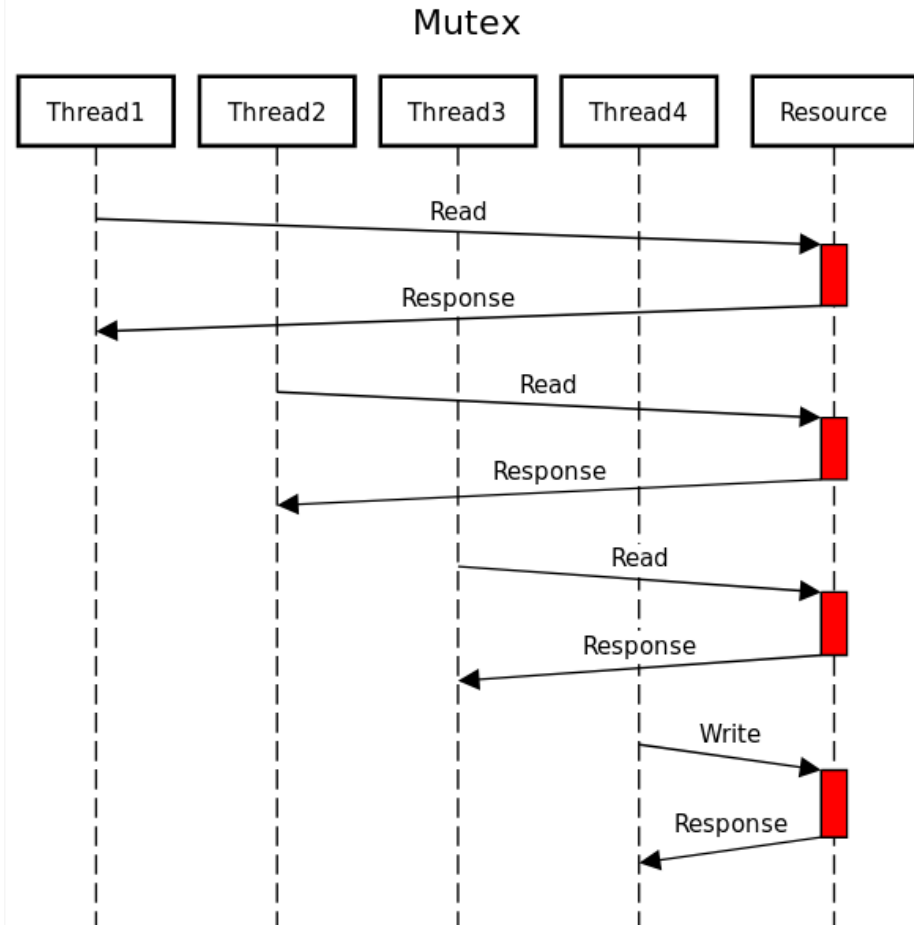

Exercise from last time --- RW lock

- Reader-writer lock
 - Single writer or multiple reader ownership
 - Expect higher concurrency when primarily reading
 - `std::shared_mutex`

What should I do if I want to prioritize the write?

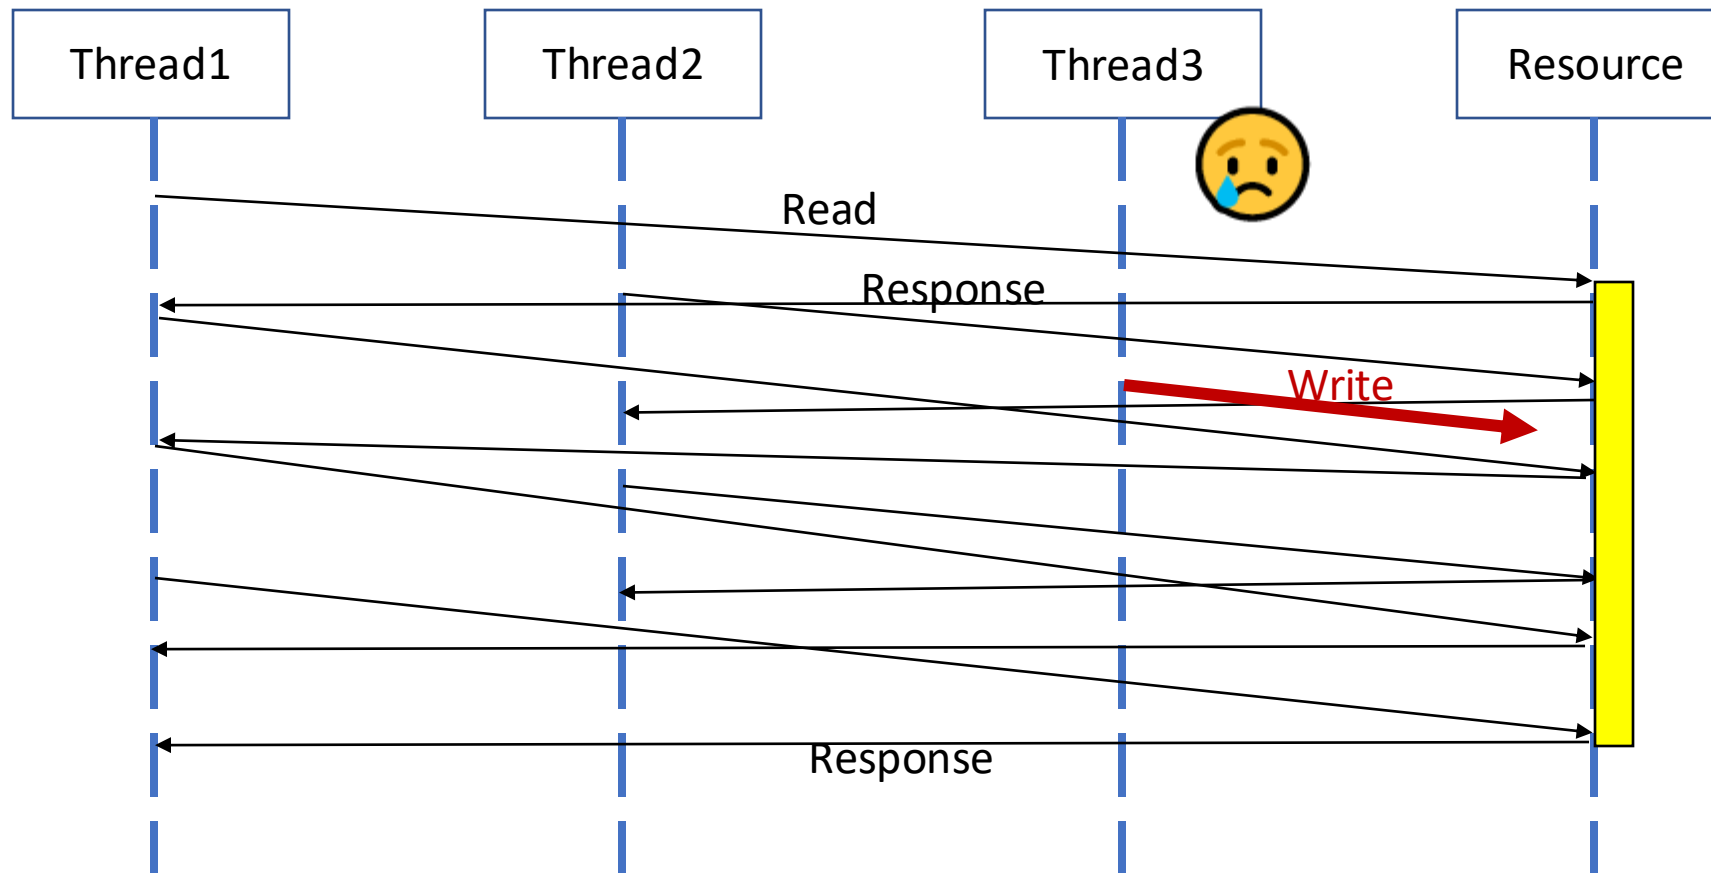

Multithreading


- Threads management
 - Launching threads
 - Threads completion
- Synchronization
 - Race condition
 - Atomic
 - Mutex
 - Locks
 - Condition variables

Condition Variable

Suppose a thread needs to wait for some other threads to do something for it, how would you encode this into the program?

Condition Variable

- Two main purpose of condition variable
 - Notify other threads
 - Waiting for some conditions that other thread can change

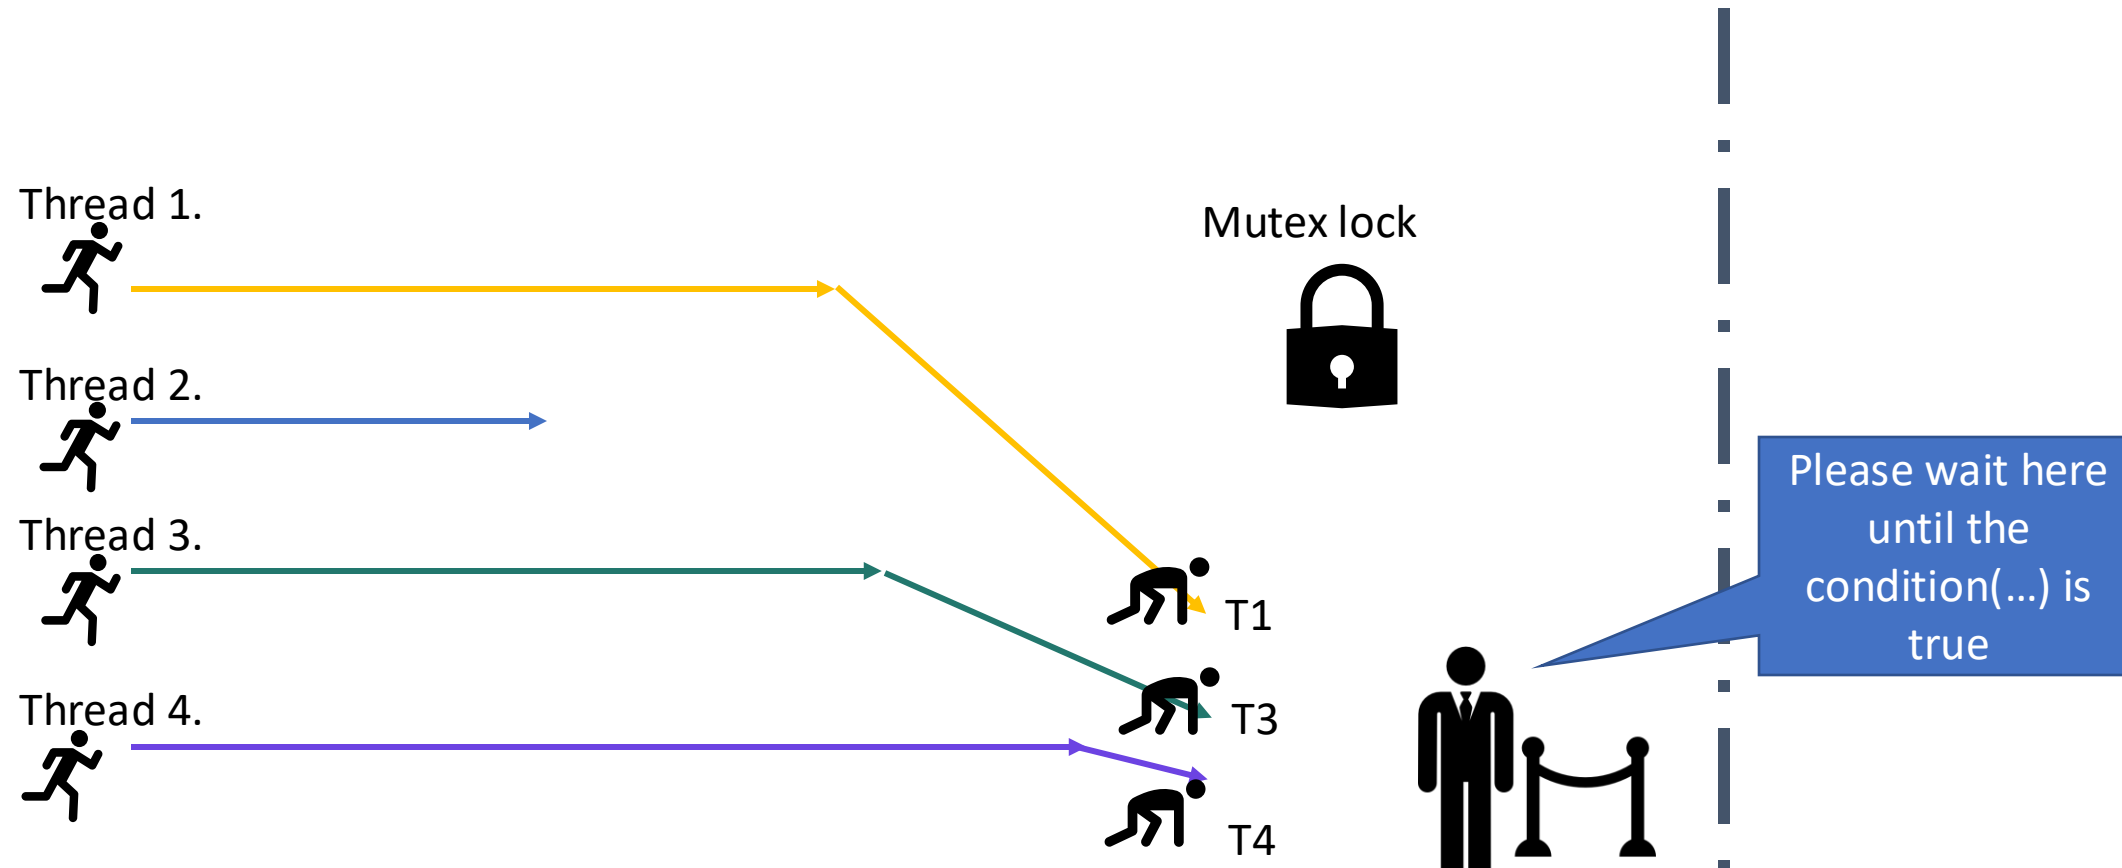

Condition Variable

1. Need mutex to use condition variable

Two roles

- Waiting threads: first acquire the lock, then wait() if condition not satisfied
- Notifying threads: thread make the changes that can allow other thread's wait condition to true and move on.

Condition Variable

--- std::condition_variable

<code>class condition_variable;</code>	<code>(since C++11)</code>
--	----------------------------

<code>std::condition_variable cv;</code>
--

Declare a
condition_variable
object

Condition Variable

--- `std::condition_variable::wait`

1. Need mutex to use condition variable
2. Condition Variable allows running threads to **wait** on some conditions and once the threads wake up
 - Atomically acquire the lock and check the condition
 - If the condition is satisfied, then it will continue the program
 - If not satisfied, it waits by releasing the lock, and goes back to waiting

Two types of wait functions for condition variable

```
void wait( std::unique_lock<std::mutex>& lock );
```

(1)

(since C++11)

```
template< class Predicate >
```

```
void wait( std::unique_lock<std::mutex>& lock, Predicate pred );
```

(2)

(since C++11)

Automatically
calls lck.unlock()
and blocks the
calling thread

Unconditional wait(lock)

```
std::mutex mtx;  
std::condition_variable cv;  
int main(){  
    std::unique_lock<std::mutex> lck(mtx);  
    cv.wait(lck);  
    .....  
}
```

predicate wait(lock, pred)

Equivalent to
while (!pred())
wait(lock);

```
std::mutex mtx;  
std::condition_variable cv;  
int current_balance = 0;  
int main() {  
    std::unique_lock<std::mutex> lck(mtx);  
    cv.wait(lck, [] { return current_balance != 0; });  
    .....  
}
```

Two types of wait functions for condition variable

To avoid the affect of spurious wake ups, always use predicate wait() !

Unconditional wait(lock)

```
std::mutex mtx;
std::condition_variable cv;
{
    std::unique_lock<std::mutex> lck(mtx);
    cv.wait(lck);
    .....
}
```

The thread will be unblocked when notify_all() or notify_one() is executed.

predicate wait(lock, pred)

```
std::mutex mtx;
std::condition_variable cv;
int current_balance = 0;
int main() {
    std::unique_lock<std::mutex> lck(mtx);
    cv.wait(lck, [] { return current_balance != 0; });
    .....
}
```

Condition Variable

--- wait

- When a thread calls the member function `wait()` on a condition variable
 - The execution of the current thread (which currently has the locked's mutex) is blocked until notified.
 - When the thread is blocked, the function **automatically** calls `unlock()`, allowing other threads to acquire the lock and continue.
- The wait function performs three atomic operations:
 - The initial unlocking of mutex and simultaneous entry into the waiting state.
 - The unblocking of the waiting state.
 - The locking of mutex before returning.

Condition Variable


--- notify

1. Need mutex to use condition variable
2. Condition Variable allows running threads to wait on some conditions
3. The waiting thread(s) is notified by working thread using:
 - `notify_one();`
 - `notify_all();`

Condition Variable

--- notify


- The waiting thread is notified by working thread using:
 - `notify_one()`:
 - Unblocks one of the threads currently waiting for this condition.
 - If no threads are waiting, the function does nothing.
 - If more than one, it is unspecified which of the threads is selected.

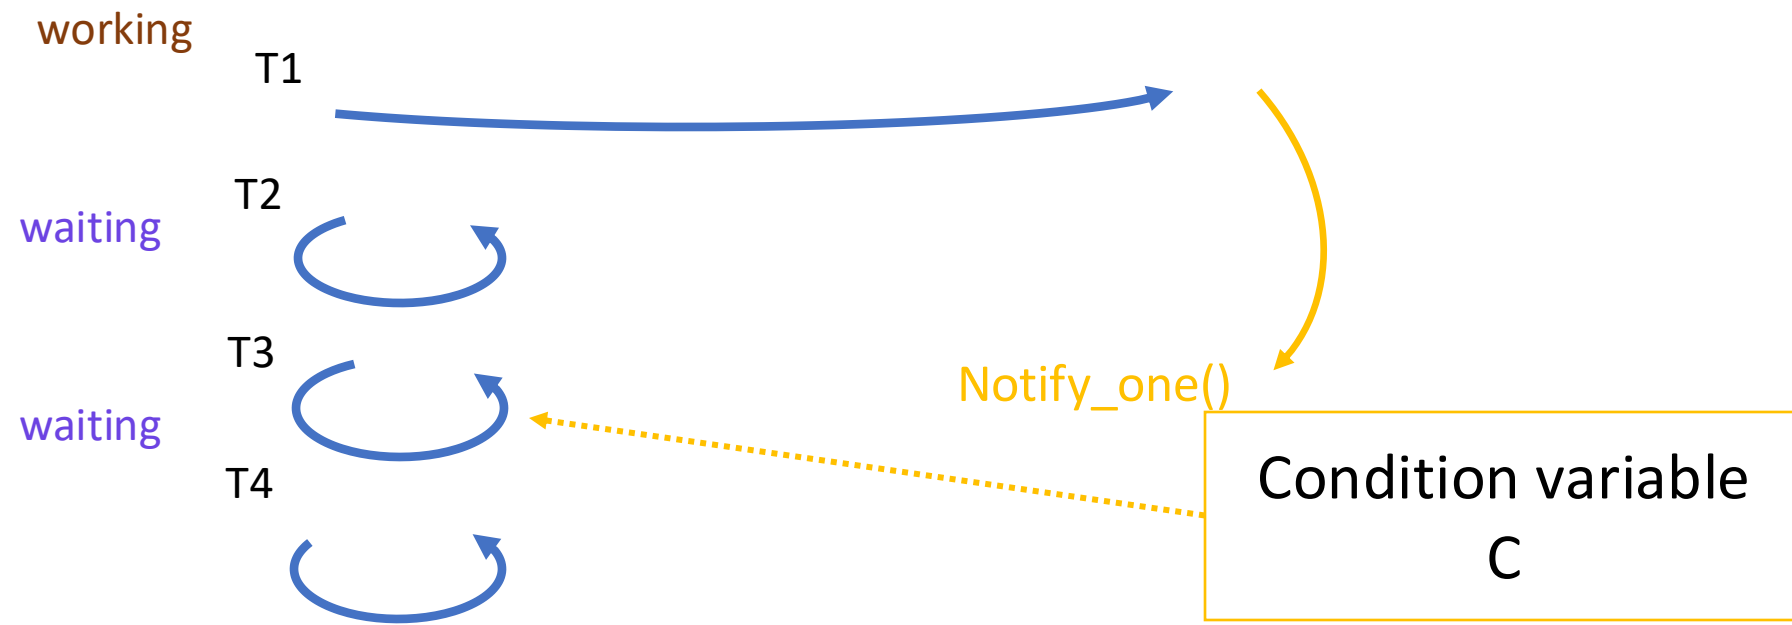


Condition Variable

--- notify


- The waiting thread is notified by working thread using:
 - `notify_all()`:
 - Unblocks all threads currently waiting for this condition.

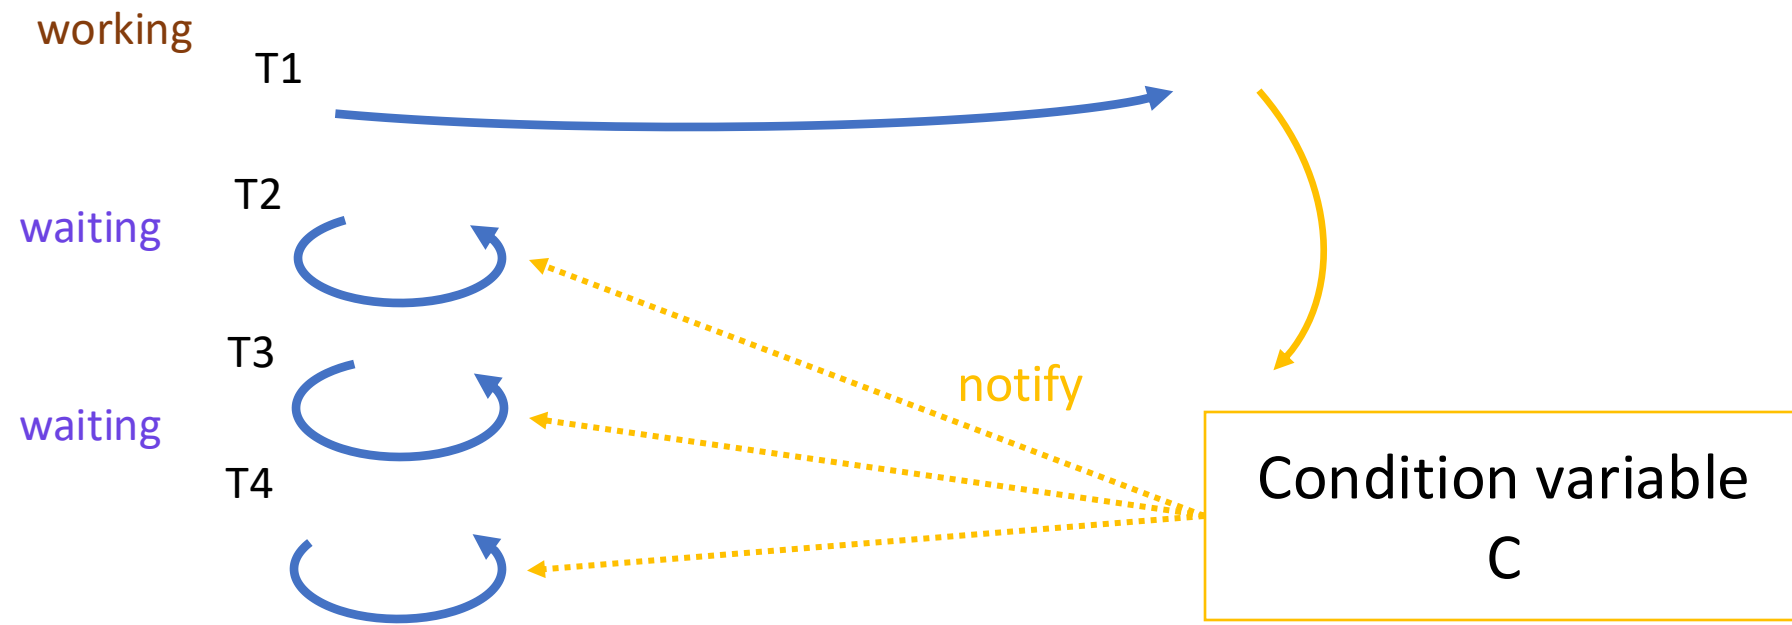

Condition Variable

1. Each thread first acquire the mutex lock
 2. Then check the condition in wait()
 3. Waiting thread(s) is notified by working thread
 4. When thread(s) waiting at the condition variable gets notified,
 - it first try to acquire the lock of mutex
 - Check the condition, the thread will not go further until the condition is true:
 - if it is true, then go further;
 - if it is not, it will again wait for the condition variable
- 

What should I do if I want to prioritize the write?

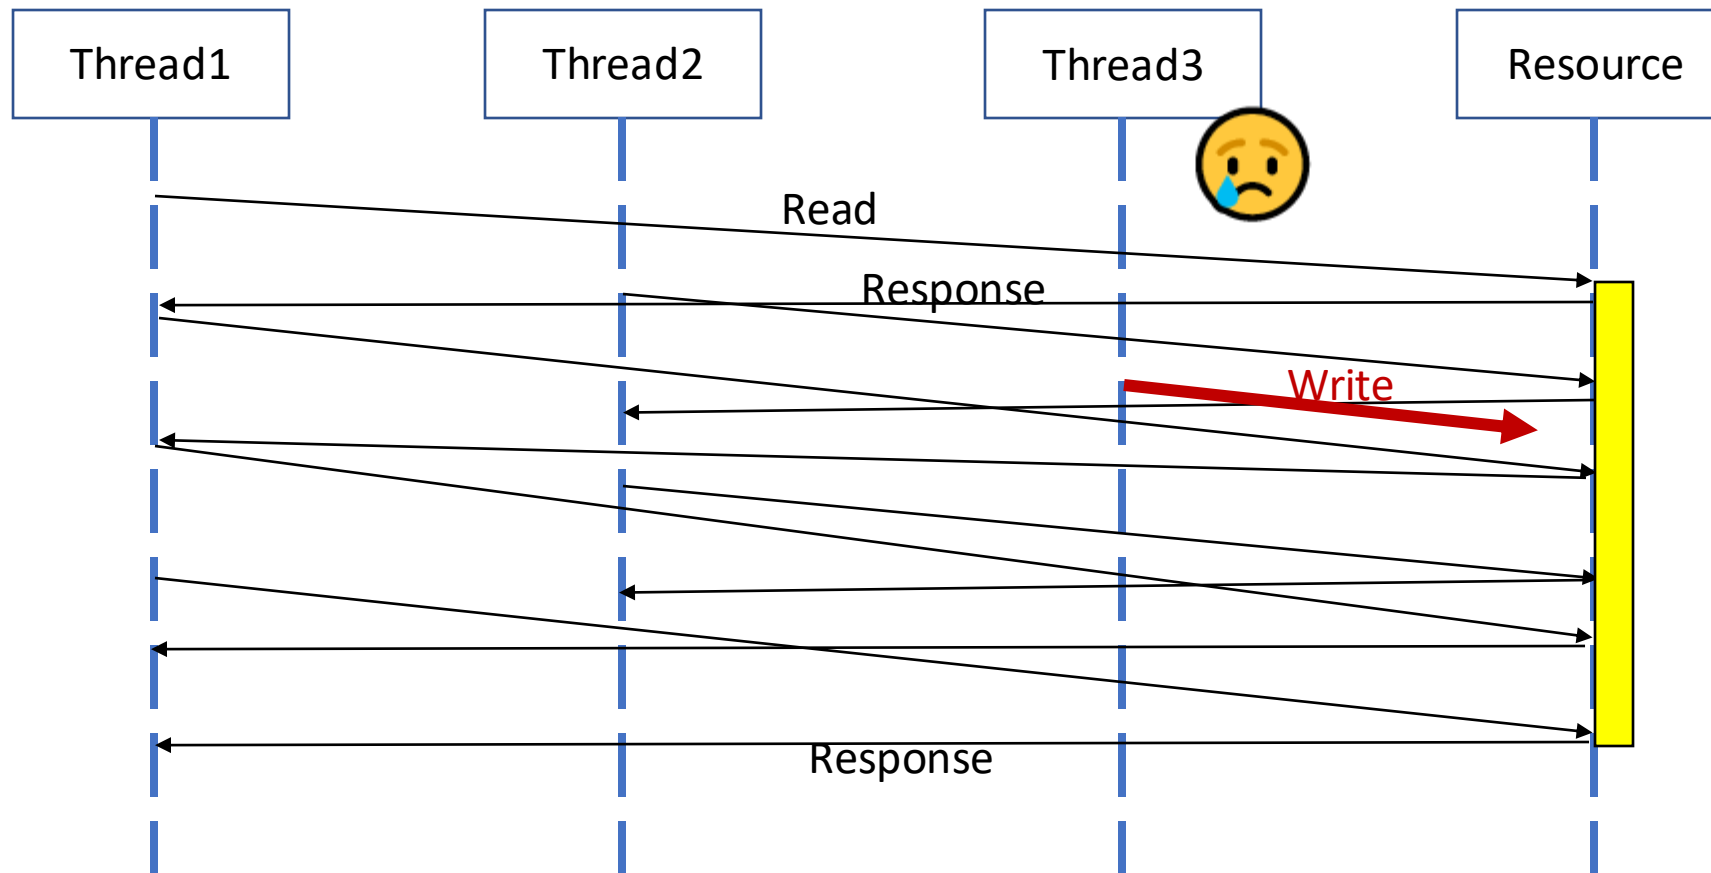

Exercise from last time --- RW lock

- Reader-writer lock
 - Single writer or multiple reader ownership
 - Expect higher concurrency when primarily reading
 - `std::shared_mutex`
 - Read/write preference

Where to find the resources?

- RW Lock: <https://www.youtube.com/watch?v=KJS3ikoiLso>
- Condition Variable:
 - https://www.cplusplus.com/reference/condition_variable/condition_variable/wait/
- Future and promise:
 - <https://www.cplusplus.com/reference/future/async/>
 - https://en.cppreference.com/w/cpp/thread/future/wait_for